
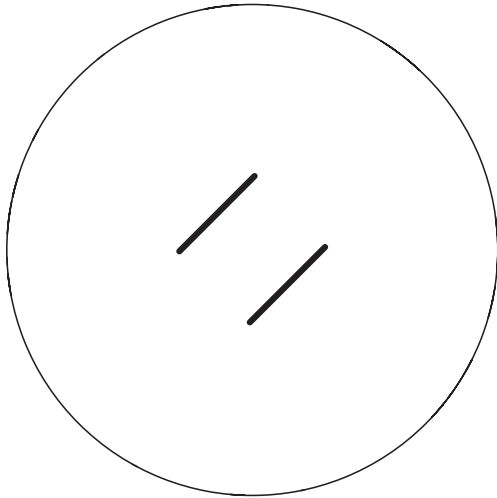


A—N—D

# BUTTON SERIES CEILING/WALL

DESIGNER  
LUKAS PEET



INSTRUCTIONS



SCAN HERE

WORLD MARKET



A-N-D.COM

# INSTALLATION NOTES

---

The luminaire is powered by 12V DC. A constant voltage LED driver is required to operate the luminaire. The LED driver varies depending on input voltage and dimming requirements.

It is recommended that two people install the Button Ceiling/Wall; one to gently support the luminaire while the other makes the electrical and mechanical connections to the ceiling.

For questions regarding installation, please email [info@n-d.com](mailto:info@n-d.com)



## CARE INSTRUCTIONS

Always wear clean gloves when handling the luminaire. Clean finished surfaces with a soft, lint-free cloth. Clean acrylic diffuser with a soft lint-free cloth and a diluted solution of warm water and dish soap.

For replacement parts contact A-N-D directly.



## WARNING


The luminaire must be installed by a qualified electrician in a dry indoor location.

Failure to meet any or all of these criteria will not only damage the luminaire, but will void both the warranty and all of its certifications.

# COMPONENTS




- ① BACKPLATE
- ② #8 SCREWS (2)
- ③ LED DRIVER
- ④ CANOPY SCREWS (3)
- ⑤ WIRE NUT (4)
- ⑥ ELECTRICAL CORD
- ⑦ CANOPY
- ⑧ LUMINAIRE BODY
- ⑨ ACRYLIC DIFFUSER
- ⑩ ROPE

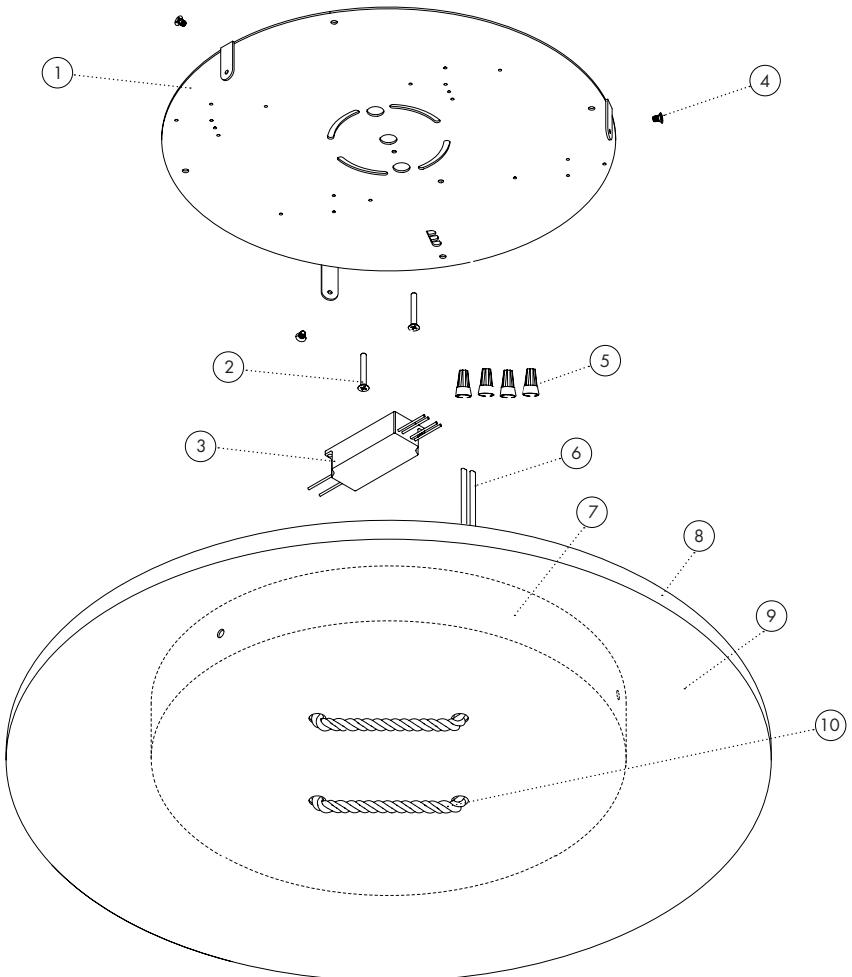

# BUTTON OPTIONS

---


There are 2 sizes for the  
Button Ceiling/Wall.



---

60cm {25.5"

**BUTTON 60**

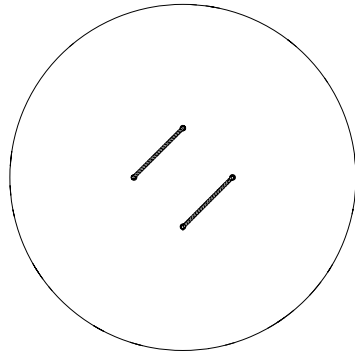

---

90cm {35.5"

**BUTTON 90**


---

The model can be mounted two ways,  
either on the ceiling or on the wall.



---

7.5cm  
3"



# LED DRIVER OPTIONS

The Button Ceiling/Wall LED driver varies depending on dimming requirements and input voltage.

Use the ordering code to determine the selected driver:

ie. BUT-90-CW-BK-27-010-230

DIMMING ----- INPUT VOLTAGE

## PHASE CUT DIMMING (PC)

M-30 SERIES - ES POWER

**INPUT:** 230VAC

**OUTPUT:** 12VDC, 40W

**L x W x H:** 111 x 44 x 32




## 0-10 + PWM DIMMING (010)

Q40-P SERIES - ES POWER

**INPUT:** 110-277VAC

**OUTPUT:** 12VDC, 40W

**L x W x H:** 111 x 44 x 32

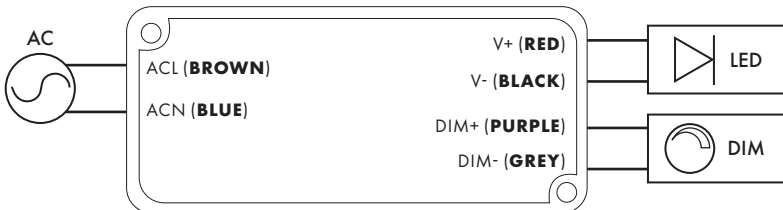


# INSTALLATION



## STEP 1



### Determine the orientation of the luminaire.

The rope is a visual element and can be oriented in one of three directions.

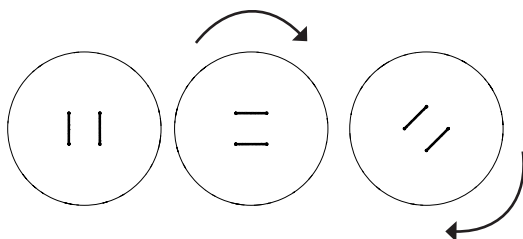

The position of the luminaire is determined by the position of the backplate.

The backplate allows for almost 360 degrees rotation.

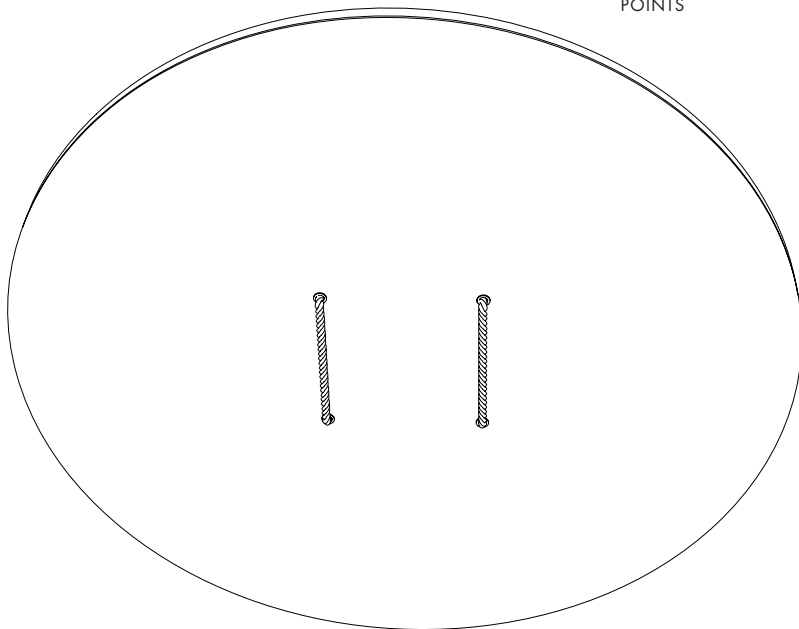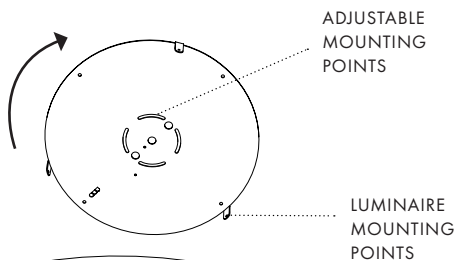


# INSTALLATION

## STEP 2

### Mount the backplate to the ceiling or wall surface.

Use the provided #8 screws.  
Anchors to be provided by installer.

**⚠ Caution!**  
Ensure that the power  
is disconnected.

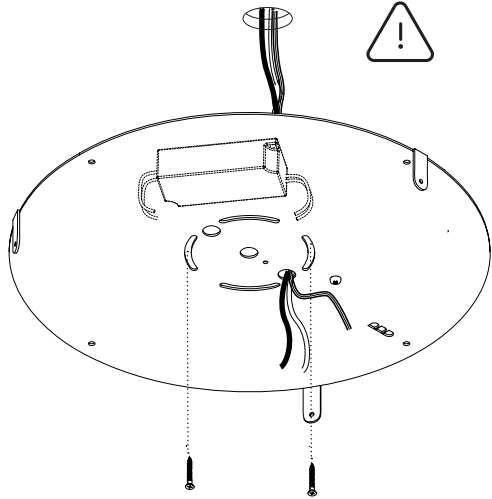

REFER TO PAGE 6: DRIVER OPTIONS FOR MORE DETAILS


### STEP 3

**Connect the primary circuit on the LED driver to input power. Connect ground.**

Black/brown wire = **Line** (L)

White/blue wire = **Neutral** (N)

Green screw = **Ground** (G)

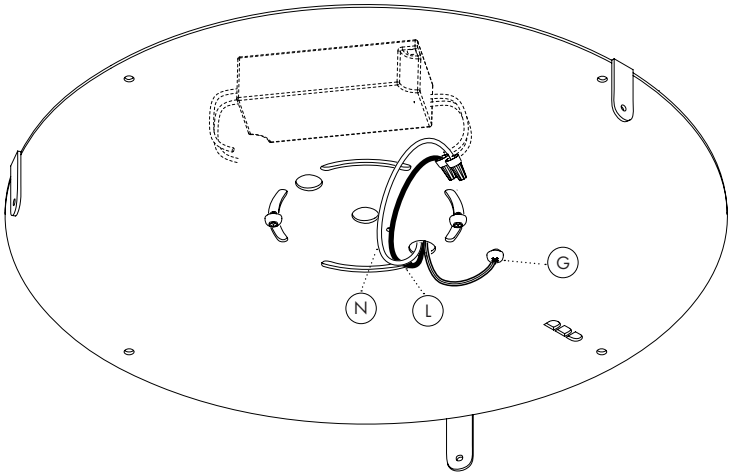


# INSTALLATION

## STEP 4

**Connect the luminaire to secondary circuit on LED driver.**

Dashed line = **Positive** (V+)

Black = **Negative** (V-)

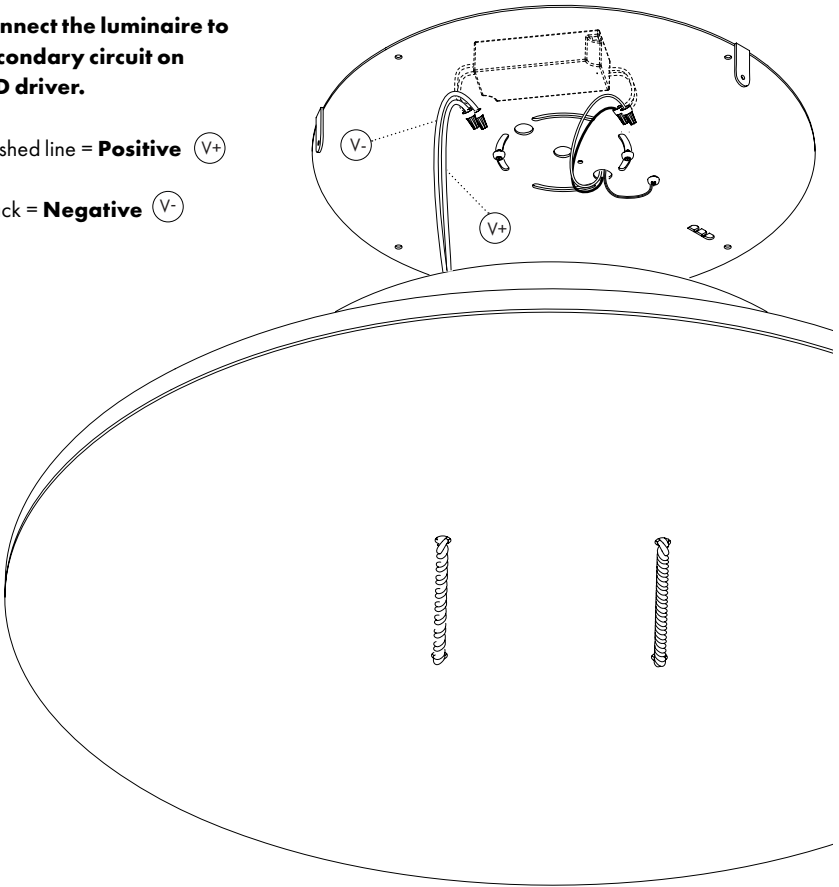


REFER TO PAGE 6: DRIVER OPTIONS FOR MORE DETAILS

---

## STEP 5

### Attach the luminaire to the backplate.

Use the provided colour matched canopy screws.

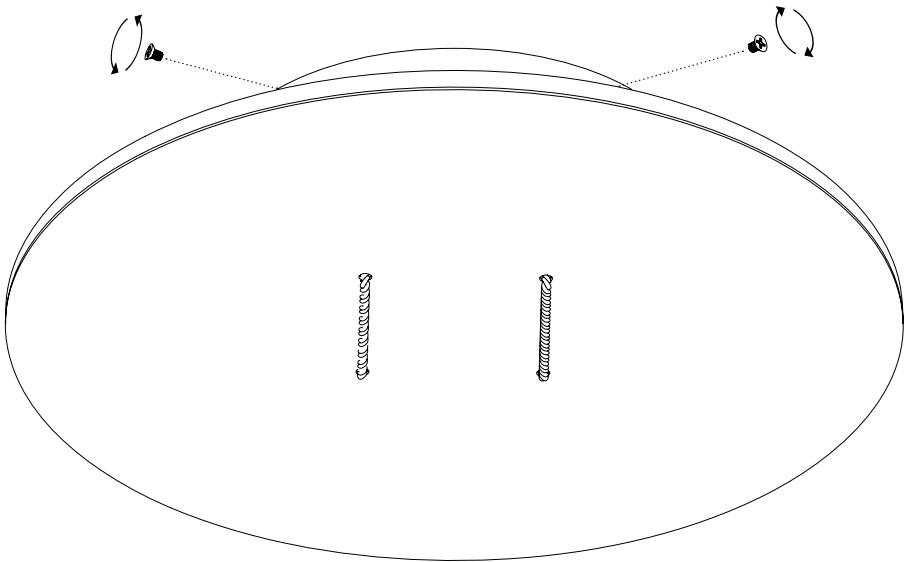

# A—N—D

For support, please contact:

[info@a-n-d.com](mailto:info@a-n-d.com)

+1 604 563 6938



1951 Franklin St,  
Vancouver, BC  
Canada V5L 0C7

**A-N-D.COM**