




Dimensions

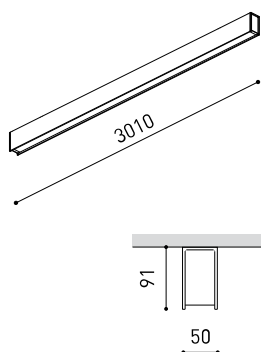

PRODUCT

Name	FIFTY+ UGR HO SURFACE 300 DIM PUSH 3000K NT
Reference	A4453431NT
Color	Textured black
RAL	9005
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	9780 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	70,8 W
Current	1050 mA
Efficacy	148 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	47%
Light beam angle	62°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	78,75 W
Frequency	50/60 Hz
Dimming	Push
Electrical insulation class	⚡

OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Diffuser included	Yes
Weight	8770 g
Packaged weight	12920 g
Packaging dimensions	Ø157,5 x 3140 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Fifty + is the longitudinal lighting profile for Surface application, individually. Fifty + adds functional light and visual support to highlight the lines, volumes and transitions defined in the architecture. Having an Opal diffuser which disperses the light and a UGR diffuser that reduces the glare angle. Both are installed as a single part along its entire length so as not to interrupt the light beam.

Polar diagram



Conical diagram

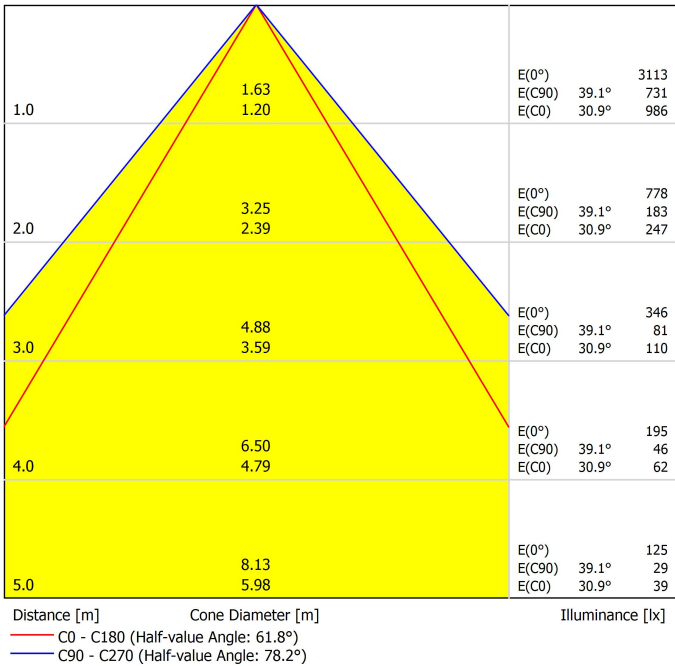

UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H		2H	16.7	17.7	16.9	17.9	18.1	16.1	17.1	16.4	17.4	17.6
3H		3H	18.3	19.3	18.6	19.5	19.8	17.2	18.1	17.5	18.4	18.6
4H		4H	18.9	19.8	19.2	20.1	20.3	17.6	18.4	17.9	18.7	19.0
6H		6H	19.3	20.1	19.7	20.4	20.7	17.8	18.6	18.2	18.9	19.2
8H		8H	19.4	20.2	19.8	20.5	20.8	17.9	18.7	18.3	19.0	19.3
12H		12H	19.5	20.2	19.8	20.5	20.9	18.0	18.7	18.3	19.0	19.3
4H		2H	17.0	17.8	17.3	18.1	18.4	16.5	17.4	16.8	17.6	17.9
3H		3H	18.8	19.6	19.2	19.9	20.2	17.8	18.5	18.1	18.8	19.2
4H		4H	19.5	20.2	19.9	20.5	20.9	18.3	19.0	18.7	19.3	19.6
6H		6H	20.1	20.6	20.5	21.0	21.4	18.7	19.2	19.1	19.6	20.0
8H		8H	20.2	20.7	20.6	21.1	21.5	18.8	19.3	19.2	19.7	20.1
12H		12H	20.3	20.8	20.8	21.2	21.6	18.9	19.3	19.3	19.8	20.2
8H		4H	19.7	20.2	20.1	20.6	21.0	18.5	19.1	19.0	19.4	19.8
6H		6H	20.3	20.7	20.7	21.1	21.6	19.0	19.4	19.5	19.9	20.3
8H		8H	20.5	20.9	21.0	21.3	21.8	19.2	19.6	19.7	20.0	20.5
12H		12H	20.7	21.0	21.2	21.4	21.9	19.4	19.7	19.8	20.1	20.6
12H		4H	19.7	20.1	20.1	20.5	21.0	18.6	19.0	19.0	19.4	19.9
6H		6H	20.3	20.7	20.8	21.1	21.6	19.1	19.4	19.6	19.9	20.4
8H		8H	20.6	20.9	21.0	21.3	21.8	19.3	19.6	19.8	20.1	20.6
Variation of the observer position for the luminaires distances S												
S = 1.0H		+0.3 / -0.3					+0.3 / -0.5					
S = 1.5H		+0.5 / -0.4					+1.2 / -1.2					
S = 2.0H		+0.9 / -0.9					+2.3 / -1.8					
Standard table		BK05					BK03					
Correction Summand		-7.0					-8.5					
Corrected Glare Indices referring to 9780lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

