


# Micro Shaper 24V

# ARKOSLIGHT



## Dimensions



## Accessories



MINIMAL TRACK OPTIONS

## PRODUCT

Name	MICRO SHAPER 24V 18°-34° 2700K N
Reference	A5440000N
Colour	Black
RAL	Anodised, bath colour, looks alike RAL 9005
Category	TRACK LIGHTS

## LIGHT SOURCE

Type	LED
Gross luminous flux	190 lm
Colour temperature	2700 K - Other K, please consult
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	2,2 W
Current	700 mA
Efficacy	86 lm/W
LED lifespan	L90B10 >102.000h
Energy efficiency class	F

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	19-27%
Light beam angle	18°-34°

## LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	3,01 W
Dimming	DIM options
Electrical insulation class	II


## OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	55 g
Packaged weight	105 g
Packaging dimensions	119 x 117 x 57 mm
Units per package	1
Materials	Aluminium / Optical Glass




In an exercise of unusual miniaturization, the Micro Shaper profiler is born to define and project light with precision, versatility, and maximum attention to detail. Its operation is based on the successive refraction of light through a set of lenses, ensuring the highest definition of the generated beam and providing the possibility to shape it by creating various geometric forms (circular, triangular, as well as other polygonal variations). Depending on its optics, one can choose between a fixed 52° opening or a variable diameter opening from 18 to 34°, achieving light beams of different proportions.

Polar diagram

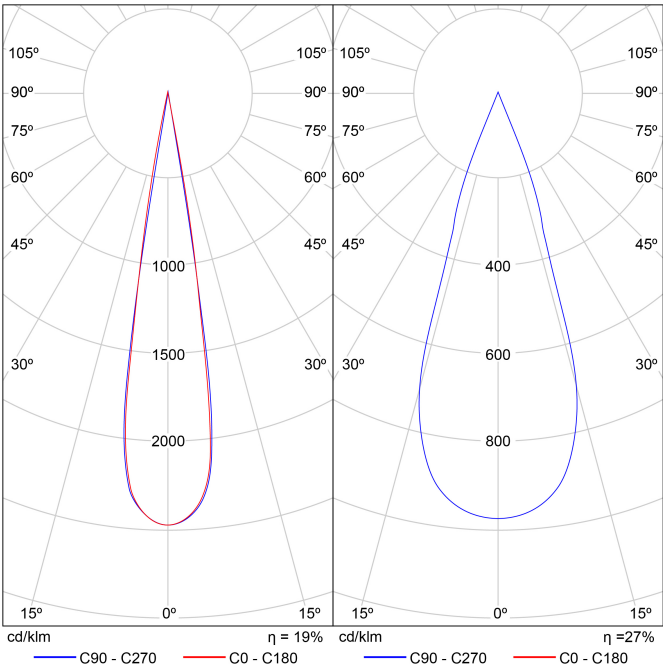

Conical diagram

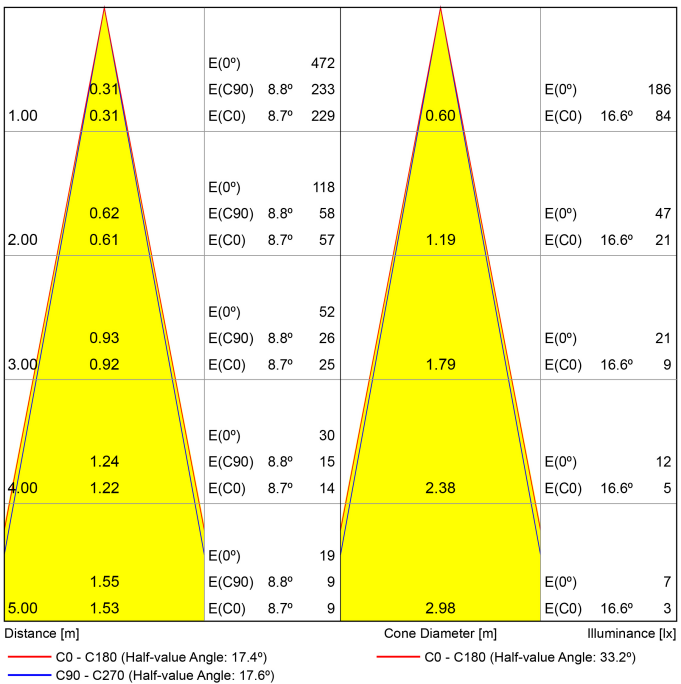

Installation guide



<https://youtu.be/KnedJbKp7oo>

# Minimal Track

# ARKOSLIGHT

Minimal Track is a 24V low-voltage lighting system designed to create minimalist and highly configurable installations. On this page, you'll find the necessary components to configure your surface-mounted system.



Or use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories. [Start your configuration →](#)




## Track & accessories - Surface mounting

Configure the shape of your track, add end caps and the required accessories, and finish the setup with the conductive strip (rubber cable).

### MINIMAL TRACK 24V

#### Profile 2m


A384-02-00- | N | WT |



#### Corner 90° 1 Plane

A384-00-02- | N | WT |

Cable length = 35mm.



#### End Cap


A384-00-05- | N | WT |



#### Rubber Cable n x 1m

A384-00-01- | N |


n = Total length of System



#### Corner 90° 1 Plane Rounded


A384-00-03- | N | WT |

Cable length = 35mm.



#### Connection Box

A384-00-06- | N | WT |




24V | Max. 4A | III

#### Corner 90° 2 Planes




A384-00-04- | N | WT |


Cable length = 100mm.




## Power Supply

Select your power supply, include a dimmer if needed, and explore the installation diagrams provided.

					P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	 NO DIM	A384-00-07-   NT   WT	40W	24V	280 x 30 x 24mm		
		A384-00-08-   NT   WT	100W	24V	280 x 30 x 24mm		
MINIMAL TRACK 24V Remote Power Supply	 NO DIM	0434-01-37	60W	24V	180 x 52 x 30mm		
		0433-10-22	100W	24V	295 x 43 x 30mm		
220 V~ 240							
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm		
		0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm		
24V   other DIM options please consult							

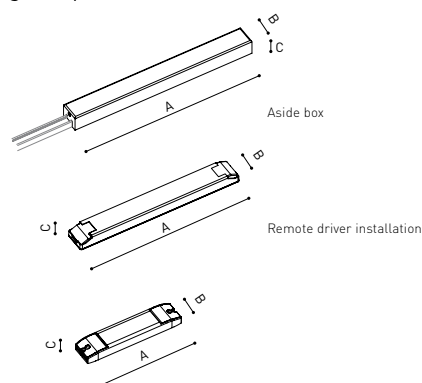

## Connection diagram:

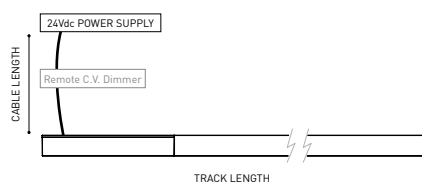

### DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X




CONNECTION BOX /  
POWER SUPPLY BOX

MINIMAL TRACK 24V PROFILE 2m

MINIMAL TRACK 24V PROFILE 2m

MINIMAL TRACK 24V PROFILE 2m

END CAP



BLACK RUBBER CABLE

n = TRACK LENGTH

COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

INSTALLATION GUIDE  
<https://youtu.be/KnedJbKp7oo>



Calle N, s/n - Pol. Ind. El Oliveral  
46394 Ribarroja del Turia-Valencia (Spain)  
info@arkoslight.com - www.arkoslight.com



# Minimal Track

ARKOSLIGHT

Minimal Track is a 24V low-voltage lighting system designed to create minimalist and highly configurable installations. On this page, you'll find the necessary components to configure your trimless-mounted system.



Or use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories. [Start your configuration →](#)




## Track & accessories - Trimless mounting

Configure the shape of your track, add end caps and the required accessories, and finish the setup with the conductive strip (rubber cable).

### MINIMAL TRACK 24V

#### Trimless Profile 2m

A467-02-00- | N |



#### Trimless Rubber Cable n x 1m

A467-00-01- | N |


n = Total length of System

24V | Max. 4A | III

#### Trimless Corner 90° 1 Plane

A467-00-02- | N |


Cable length = 140mm.



#### Trimless Corner 90° 2 Planes

A467-00-04- | N |

Cable length = 200mm.



#### Trim. Corner 90° 1 Plane Connec.

A467-00-03- | N |



#### Trimless End Caps

A467-00-05- | N |

Two End Caps Included




#### Trimless Straight Joiner

A467-00-06



#### Trimless Connection Box

A467-00-07- | N |



## Power Supply


Select your power supply, include a dimmer if needed, and explore the installation diagrams provided.

		P	V	D (A x B x C)
MINIMAL TRACK 24V	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply	NO DIM 0433-10-22	100W	24V	295 x 43 x 30mm


220 V~  
240

MINIMAL TRACK 24V	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
Remote Constant Voltage Dimmer	0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm

24V | other DIM options please consult

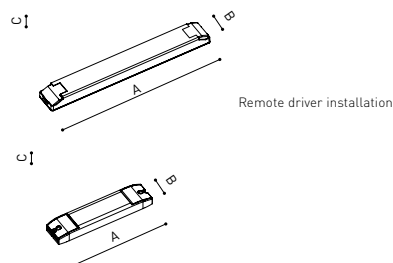


## Connection diagram:

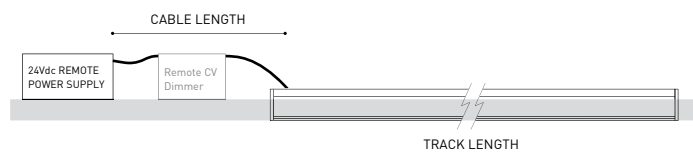

### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

Reduce 5 meters per each 'Corner 90° 1 Plane CONNECTOR' used.

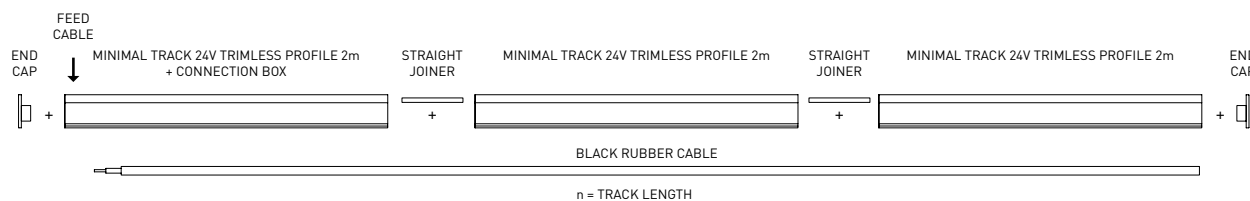

COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

INSTALLATION GUIDE  
<https://youtu.be/KnedJbKp70o>



Calle N, s/n - Pol. Ind. El Olival  
46394 Ribarroja del Turia-Valencia (Spain)  
info@arkoslight.com - www.arkoslight.com




# Minimal Track

# ARKOSLIGHT

Minimal Track is a 24V low-voltage lighting system designed to create minimalist and highly configurable installations. On this page, you'll find the necessary components to configure your suspension-mounted system.



Or use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories. [Start your configuration →](#)

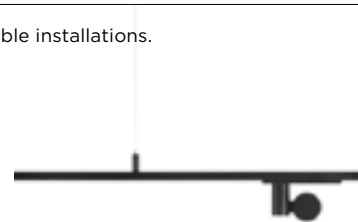

## Track & accessories - Suspension mounting

Configure the shape of your track, add end caps and the required accessories, and finish the setup with the conductive strip (rubber cable).

### MINIMAL TRACK 24V Suspension

#### Profile 2m

A384-02-00- | N | WT |




#### Profile 2m Initial feed kit

A400-02-10- | N | WT |

#### Profile 2m Middle feed kit\*

A400-02-20- | N | WT |

\* Unidirectional Middle Feed.



#### Rubber Cable n x 1m

A384-00-01- | N |



n = Total length of System

24V | Max. 4A | III

#### Corner 90°

A400-00-03- | N | WT |

Cable length = 85mm.



#### Suspension Straight Joiner

A400-00-02- | N | WT |

#### Suspension Kit



A400-02-04- | N | WT |

Max distance between suspension kits = 100 cm.

#### Suspension End Caps



A400-00-05- | N | WT |

Two End Caps Included.



## Power Supply


Select your power supply, include a dimmer if needed, and explore the installation diagrams provided.

			P	V	D [A x B x C]
MINIMAL TRACK 24V Susp Power Supply Box		A400-00-06-   NT   WT	40W	24V	280 x 30 x 36mm
		A400-00-07-   NT   WT	100W	24V	280 x 30 x 36mm
MINIMAL TRACK 24V Remote Power Supply		0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm


220 V~  
240

MINIMAL TRACK 24V Remote Constant Voltage Dimmer	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm

24V | other DIM options please consult

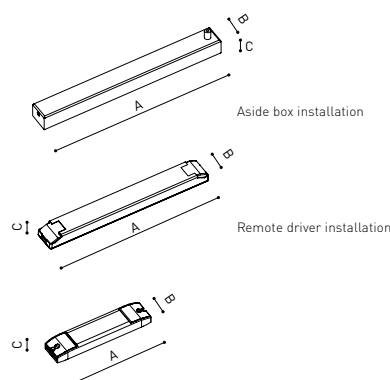


## Connection diagram:

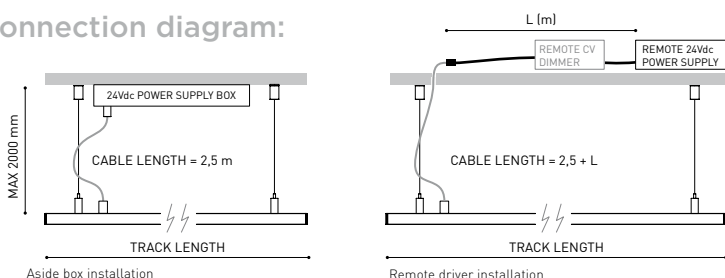

### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

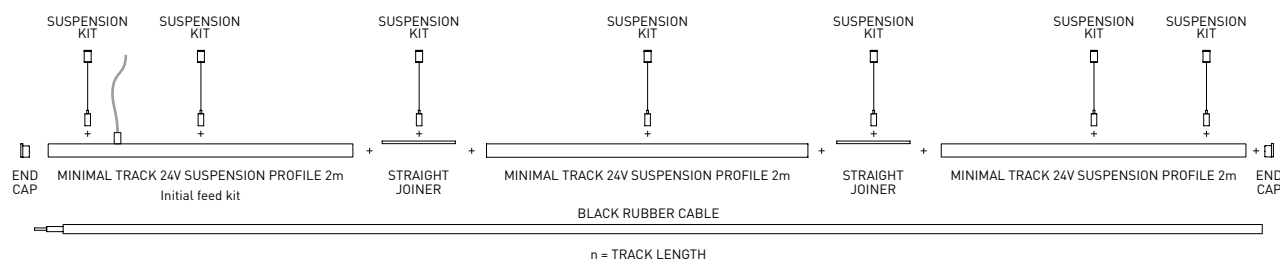


COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |



PRODUCT	
Model	Coaxial Trimless
Reference	A023-00-03-   W   N
Colour	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
Category	Accessories



Dimmensional drawing



Accessory for trimless cable

Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.



Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



INSTALLATION GUIDE  
[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)



PRODUCT	
Model	Trimless Tool <b>D20 X D52 MM</b>
Reference	A478-00-01
Category	Accessories





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:


### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:


### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen

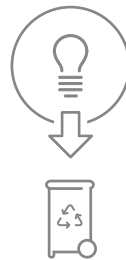

Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen

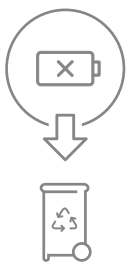

Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

