




## Dimensions



## Accessories

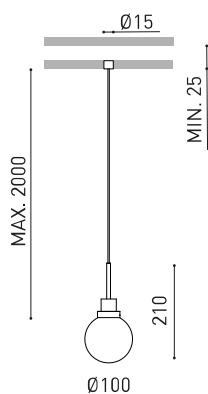

WIRE TRIMLESS ACCESSORY  
(INCLUDED)



CORD ACCESSORY



TRIMLESS TOOL  
Awards



reddot winner 2021  
lighting design



| Name      | ALASKA BIG WIRE TRIMLESS 2M DIM PH.CUT 3000K BG |
|-----------|---|
| Reference | A4550151BG                                      |
| Colour    | Brushed Gold - Other colours, please consult    |
| RAL       | Electrolytic bath                               |
| Category  | SUSPENSION                                      |

## PRODUCT

| Type                    | LED                              |
|-------------------------|----------------------------------|
| Gross luminous flux     | 1100 lm                          |
| Colour temperature      | 3000 K - Other K, please consult |
| Chromatic stability     | MacAdam Step 2                   |
| Colour Rendering Index  | CRI>90                           |
| Power                   | 8,4 W                            |
| Current                 | 500 mA                           |
| Efficacy                | 131 lm/W                         |
| LED lifespan            | L90B10 >60.000h                  |
| Energy efficiency class | E                                |

## LIGHT SOURCE

## LIGHTING FIXTURE | PHOTOMETRIC DATA

| Lighting efficiency | 37% |
|---------------------|-----|
| Light beam angle    | 44° |

## LIGHTING FIXTURE | ELECTRICAL DATA

| Driver                      | Included - Remote                     |
|-----------------------------|---------------------------------------|
| Power values of the system  | 11,32 W                               |
| Dimming                     | Phase Cut - Other DIM, please consult |
| Electrical insulation class | □                                     |


## OTHER DATA

| Sealing                   | IP20                      |
|---------------------------|---------------------------|
| Recess measurements       | Ø20 mm                    |
| Cord length               | Max. 2 m                  |
| Fast adjustment tensioner | No                        |
| Weight                    | 1485 g                    |
| Packaged weight           | 1835 g                    |
| Packaging dimensions      | 413 x 172 x 127 mm        |
| Units per package         | 1                         |
| Materials                 | Aluminium / Optical Glass |





Alaska is the contemporary reinterpretation of the technology and design of the classical incandescent filament light bulb. Alaska is composed of a solid optical glass sphere that symbolically represents the glass bulb of a traditional light bulb. Its compact body is one single piece that is manually lathed and polished like a piece of jewellery. Each one of the luminaires is traditionally produced, thus acquiring the value of an unrepeatable decorative work.

Polar diagram

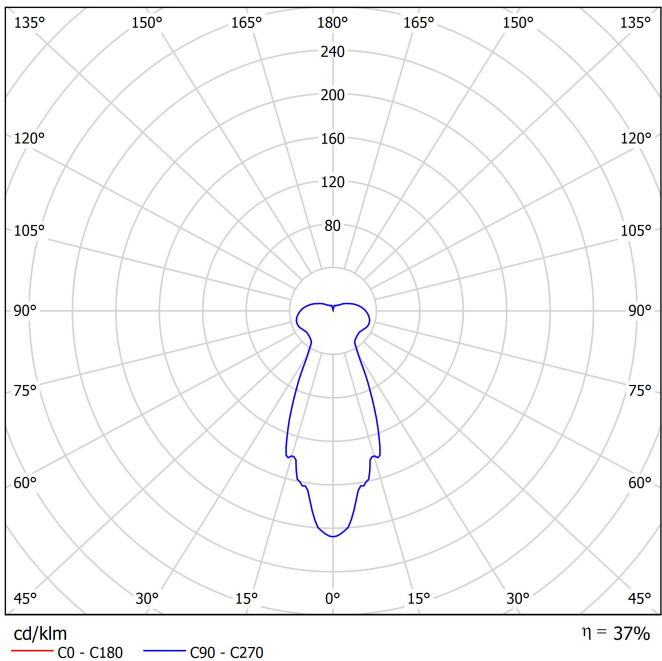

Conical diagram

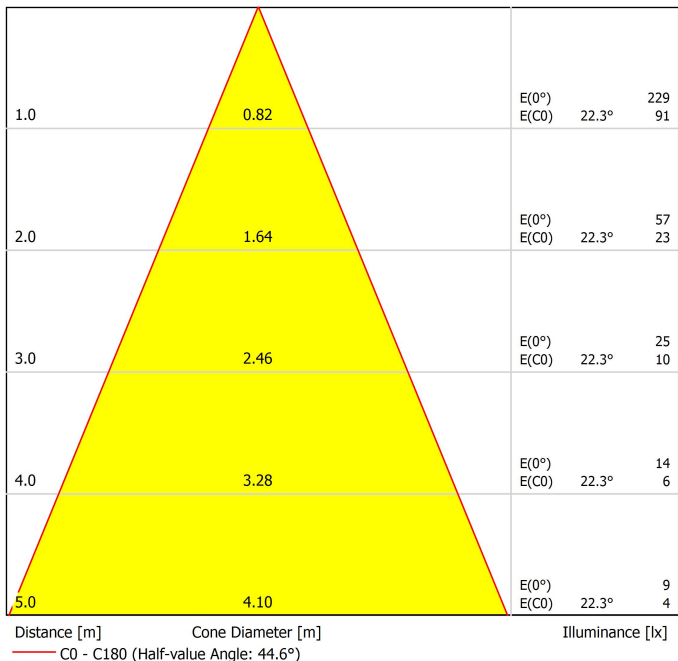



DRIVER

|            |                            |
|------------|----------------------------|
| 0000-95-39 | DRIVER 10W 500mA PHASE CUT |
|------------|----------------------------|

PHASE CUT DIMMERS TESTED FOR COMPATIBILITY:


| Brand / Manufacturer | Model number  | Dimming Type  |
|----------------------|---------------|---------------|
| Niko                 | 310-0190X     | Trailing edge |
| Jung                 | LB-Management | Trailing edge |
| HZC Electric         | AU-P3         | Trailing edge |
| Philips              | SED-200A      | Trailing edge |
| Merten/Schneider     | SBD315RC      | Trailing edge |
| Etman                | ETM327        | Trailing edge |
| Etman                | ETM329        | Trailing edge |
| Casambi              | CBU-TED       | Trailing edge |

THE PARTICULAR CONDITIONS OF EACH INSTALLATION AND THE SPECIFICATIONS AND CONDITIONS OF USE OF EACH REGULATOR, MAY DIFFER FROM THOSE CONSIDERED IN THE COMPATIBILITY TESTING, AND AFFECT ITS PERFORMANCE IN SAID INSTALLATION.  
FOR MORE INFO, PLEASE CONSULT



|           |  |                |
|-----------|--|----------------|
|           |  | PRODUCT        |
| Model     |  | Cord Accessory |
| Reference |  | 0223-00-00   N |
| Colour    |  | N ■ RAL9005    |
| Category  |  | Accessories    |

Dimmensional drawing





INSTALLATION GUIDE  
[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)



| PRODUCT   |                                   |
|-----------|-----------------------------------|
| Model     | Trimless Tool <b>D20 X D52 MM</b> |
| Reference | A478-00-01                        |
| Category  | Accessories                       |





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

