




## Dimensions



## Awards

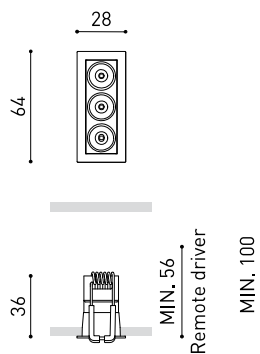

## PRODUCT

Name	BLACK FOSTER MICRO RECESSED 3 4000K N
Reference	A4141012N
Color	Black
RAL	9005
Category	CEILING RECESSED

## LIGHT SOURCE

Type	LED
Gross luminous flux	510 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	4,2 W
Current	500 mA
Efficacy	121 lm/W
LED lifespan	L90B10 >60.000h
Energy efficiency class	E

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	87%
Light beam angle	37°

## LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	5,75 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	□


## OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	24 x 60 mm
Weight	163 g
Packaged weight	228 g
Packaging dimensions	176 x 61 x 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate



Black Foster Micro is a feat of engineering which brings the acclaimed 'The Invisible Black' effect to a hyper-reduced light. Its tiny size and thin trim offer a 'trimless visual' aesthetic which combines with its almost imperceptible presence as a result of its compact dimensions. Black Foster Micro is designed for general or accent lighting and can be used in projects that seek ceiling lighting that plays a minimal role.


## Polar diagram

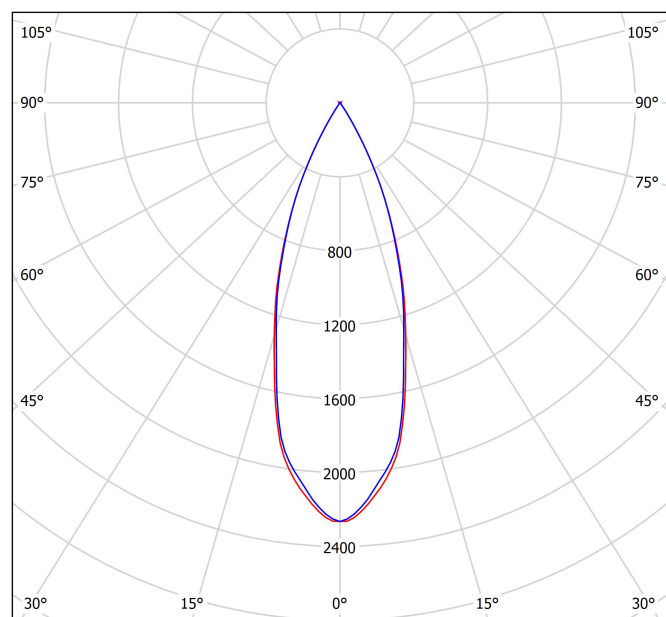

cd/klm  
— C0 - C180 — C90 - C270

η = 87%

## Conical diagram

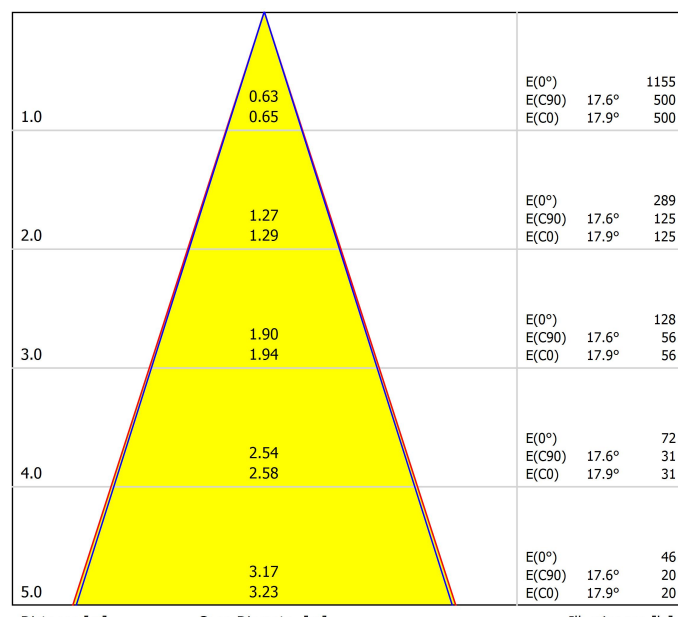

Distance [m] Cone Diameter [m] Illuminance [lx]  
— C0 - C180 (Half-value Angle: 35.8°)  
— C90 - C270 (Half-value Angle: 35.2°)

## UGR

Glare Evaluation According to UGR												
Room Ceiling	70	70	50	50	30	70	70	50	50	30	70	70
Room Walls	50	30	50	30	30	50	30	50	30	30	50	30
Room Floor	20	20	20	20	20	20	20	20	20	20	20	20
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	-2.8	-2.1	-2.5	-1.9	-1.7	-3.5	-2.8	-3.2	-2.6	-2.4	-2.4
3H	3H	0.3	0.9	0.6	1.1	1.4	-0.3	0.3	0.0	0.6	0.8	0.8
4H	4H	2.1	2.6	2.4	2.9	3.1	1.6	2.1	1.9	2.4	2.6	2.6
6H	6H	4.5	5.0	4.9	5.3	5.6	3.4	3.9	3.8	4.2	4.5	4.5
8H	8H	5.5	6.0	5.8	6.3	6.6	4.5	5.0	4.8	5.3	5.6	5.6
12H	12H	6.8	7.3	7.2	7.6	7.9	5.9	6.4	6.3	6.7	7.0	7.0
4H	2H	-2.2	-1.6	-1.9	-1.4	-1.1	-2.7	-2.2	-2.4	-1.9	-1.7	-1.7
3H	3H	1.3	1.7	1.6	2.0	2.3	0.8	1.2	1.1	1.5	1.8	1.8
4H	4H	3.3	3.7	3.7	4.0	4.4	2.8	3.2	3.1	3.5	3.8	3.8
6H	6H	6.0	6.3	6.4	6.7	7.1	5.0	5.3	5.3	5.6	6.0	6.0
8H	8H	7.1	7.4	7.5	7.8	8.2	6.1	6.4	6.6	6.8	7.2	7.2
12H	12H	8.6	8.8	9.0	9.2	9.6	7.7	8.0	8.1	8.4	8.8	8.8
8H	4H	4.1	4.4	4.5	4.8	5.1	3.6	3.9	4.1	4.3	4.7	4.7
6H	6H	6.9	7.1	7.4	7.6	8.0	6.1	6.3	6.6	6.8	7.2	7.2
8H	8H	8.2	8.4	8.7	8.9	9.3	7.5	7.6	7.9	8.1	8.5	8.5
12H	12H	9.9	10.0	10.4	10.5	11.0	9.2	9.4	9.7	9.8	10.3	10.3
4H	4H	4.3	4.5	4.7	4.9	5.4	3.9	4.2	4.4	4.6	5.0	5.0
6H	6H	7.2	7.4	7.7	7.8	8.3	6.5	6.7	6.9	7.1	7.6	7.6
8H	8H	8.6	8.8	9.1	9.2	9.7	7.9	8.1	8.4	8.5	9.0	9.0
Variation of the observer position for the luminare distances S												
S = 1.0H		+4.7	-2.2				+4.9	-2.4				
S = 1.5H		+7.4	-2.5				+7.6	-2.7				
S = 2.0H		+9.4	-2.8				+9.7	-3.4				
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 510lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:


### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen

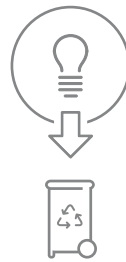

Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

