


Black Foster Surface

ARKOSLIGHT



Dimensions

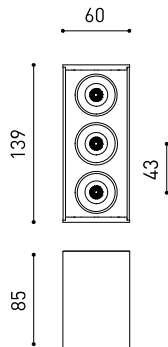

Awards



PRODUCT

Name	BLACK FOSTER SURF 3 FLOOD 3500K WTMG
Reference	A3203013WTMG
Color	Textured white-Metallized gold
RAL	Metallic finish
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	690 lm
Colour temperature	3500 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	6,3 W
Current	700 mA
Efficacy	110 lm/W
LED lifespan	L90B10 >102.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	92%
Light beam angle	38°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	8,53 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	□


OTHER DATA

Sealing	IP20
Weight	490 g
Packaged weight	530 g
Packaging dimensions	175 x 93 x 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

Polar diagram

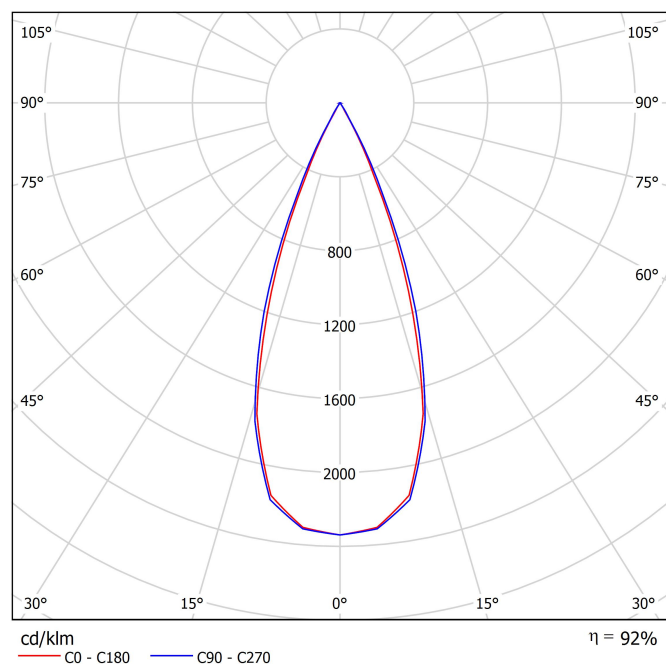

Conical diagram

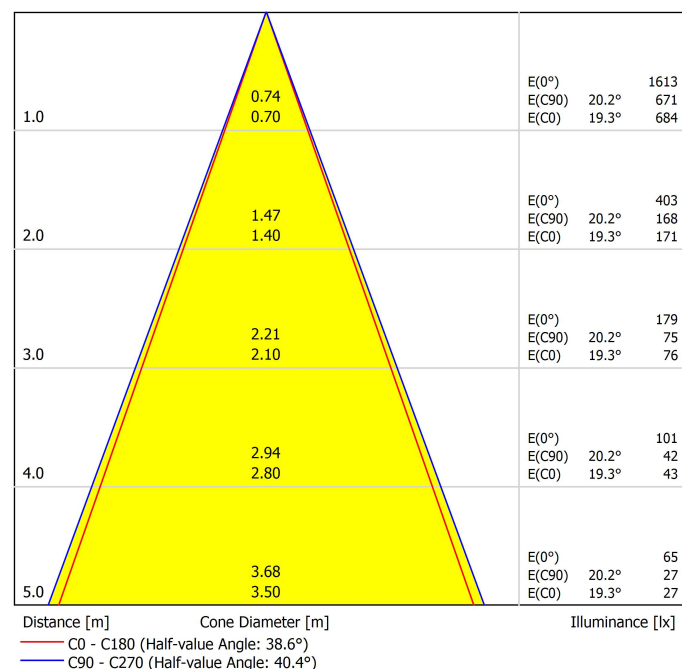

UGR

Glare Evaluation According to UGR												
Room Size	70	70	50	50	30	70	70	50	50	30	70	70
X	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis	Viewing direction at right angles to lamp axis
2H	2H	-11.0	-10.4	-10.8	-10.2	-10.0	-11.1	-10.5	-10.8	-10.3	-10.1	-10.1
3H	3H	-6.1	-5.5	-5.8	-5.3	-5.0	-5.1	-4.6	-4.9	-4.3	-4.1	-4.1
4H	4H	-3.0	-2.5	-2.7	-2.2	-2.0	-1.8	-1.3	-1.5	-1.0	-0.8	-0.8
6H	6H	0.4	0.9	0.7	1.1	1.4	1.8	2.3	2.1	2.6	2.9	2.9
8H	8H	2.1	2.6	2.5	2.9	3.2	3.6	4.1	3.9	4.4	4.7	4.7
12H	12H	4.0	4.5	4.4	4.8	5.1	5.5	6.0	5.9	6.3	6.6	6.6
4H	2H	-9.4	-8.8	-9.1	-8.6	-8.3	-9.4	-8.9	-9.1	-8.6	-8.4	-8.4
3H	3H	-4.3	-3.8	-4.0	-3.5	-3.2	-3.6	-3.1	-3.2	-2.8	-2.5	-2.5
4H	4H	-1.2	-0.8	-0.9	-0.5	-0.2	-0.2	0.2	0.1	0.5	0.8	0.8
6H	6H	2.2	2.5	2.6	2.9	3.3	3.5	3.8	3.9	4.2	4.5	4.5
8H	8H	4.1	4.3	4.5	4.7	5.1	5.4	5.7	5.8	6.0	6.4	6.4
12H	12H	6.1	6.3	6.5	6.7	7.1	7.4	7.7	7.9	8.1	8.5	8.5
8H	4H	0.0	0.3	0.4	0.7	1.1	0.7	1.0	1.2	1.4	1.8	1.8
6H	6H	3.6	3.8	4.1	4.3	4.7	4.6	4.8	5.1	5.2	5.7	5.7
8H	8H	5.6	5.8	6.1	6.2	6.7	6.7	6.9	7.1	7.3	7.8	7.8
12H	12H	7.8	7.9	8.3	8.4	8.9	8.9	9.1	9.4	9.5	10.0	10.0
12H	4H	0.6	0.8	1.0	1.2	1.6	1.1	1.4	1.5	1.8	2.2	2.2
6H	6H	4.2	4.4	4.6	4.8	5.3	5.0	5.2	5.5	5.6	6.1	6.1
8H	8H	6.2	6.4	6.7	6.8	7.3	7.2	7.3	7.6	7.8	8.3	8.3
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.7	-0.3				+1.3	-0.4				
S = 1.5H		+1.4	-0.5				+2.7	-0.7				
S = 2.0H		+2.4	-0.8				+4.2	-1.0				
Standard table		---	---				---	---				
Correction		---	---				---	---				
Summand		---	---				---	---				
Corrected Glare Indices referring to 690lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

