




### Dimensions



### Accessories



DRIVER OPTIONS



CONNECTOR IP67

### PRODUCT

Name	DARK HONEYCOMB SPOT 2700K N
Reference	A5130010N
Color	Black
RAL	9005
Category	OUTDOOR

### LIGHT SOURCE

Type	LED
Gross luminous flux	100 / 180 / 250 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI > 90
Power	1 / 2,1 / 3,2 W
Current	350 / 700 / 1050 mA
Efficacy	100 / 86 / 78 lm/W
LED lifespan	L90B10 > 102.000h
Energy efficiency class	F

### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	54%
Light beam angle	17°

### LIGHTING FIXTURE | ELECTRICAL DATA


Driver	Excluded: Must be placed on remote
Dimming	No Dim - Other DIM, please consult
Electrical insulation class	II




### OTHER DATA


Sealing	IP67
Wireless control	Please Consult
Impact resistance	IK08
Recess measurements	Ø52 mm
Outdoor Use	Yes
Maximum surface temperature	40°
Supported load	5000
Weight	235 g
Packaged weight	266,4 g
Packaging dimensions	82 x 74 x 91 mm
Units per package	1
Materials	Stainless Steel (AISI 304) / Aluminium / Glass-Transparent

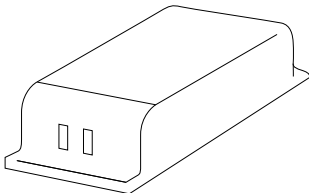

Dark is a floor-recessed LED luminaire used together with elements that we wish to illuminate upwards, to be able to highlight their architectonic presence (structures, walls, trees, gardens, cornices, etc.). \*\*\* NOTE: Recessed box included



DRIVER OPTIONS	P	I	CCT	Flux
<b>0434-00-39</b>	1W	350mA	2700K	100 lm
1 to 12 Darks			3000K	120 lm
 NO DIM   IP20			4000K	130 lm
<b>0434-00-40</b>	2,1W	700mA	2700K	180 lm
1 to 12 Darks			3000K	200 lm
 NO DIM   IP20			4000K	240 lm
<b>0434-00-41</b>	3,2W	1050mA	2700K	250 lm
1 to 11 Darks			3000K	280 lm
 NO DIM   IP20			4000K	325 lm
220 240 V ~	Driver must be placed on remote Phase cut & other DIM options please consult			

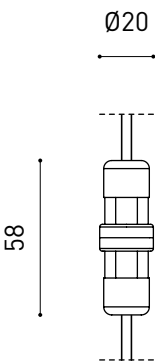

PRODUCT	
Model	Connector IP67
Reference	0434-01-66-   N
Category	Accessories
For cable Ø4,5-6,5mm, section ≤1,5mm²	



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:


### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:


### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen

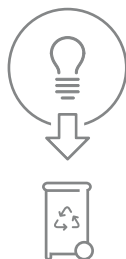

Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen

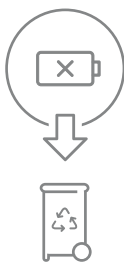

Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

