


Dimensions



Awards

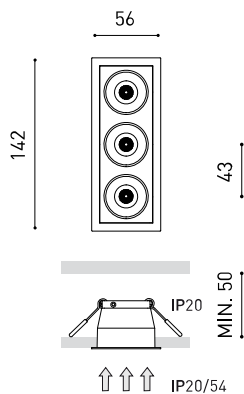

PRODUCT

Name	BLACK FOSTER REC 3 FLOOD 3500K WN
Reference	A3193013WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

LIGHT SOURCE

Type	LED
Gross luminous flux	690 lm
Colour temperature	3500 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	6,3 W
Current	700 mA
Efficacy	110 lm/W
LED lifespan	L90B10 >102.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	92%
Light beam angle	38°

LIGHTING FIXTURE | ELECTRICAL DATA


Driver	Included - Connected
Power values of the system	8,36 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	□

OTHER DATA


Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	50 x 136 mm
Weight	315 g
Packaged weight	385 g
Packaging dimensions	168 x 98 x 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene



Polar diagram

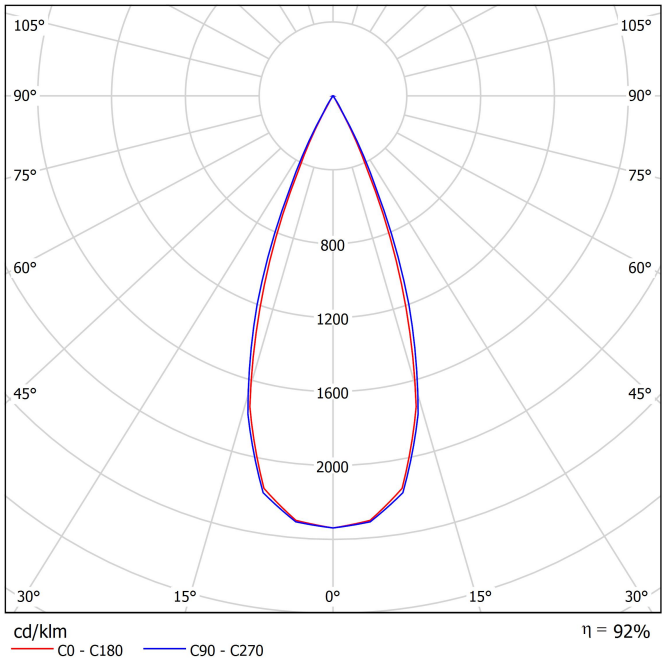

Conical diagram

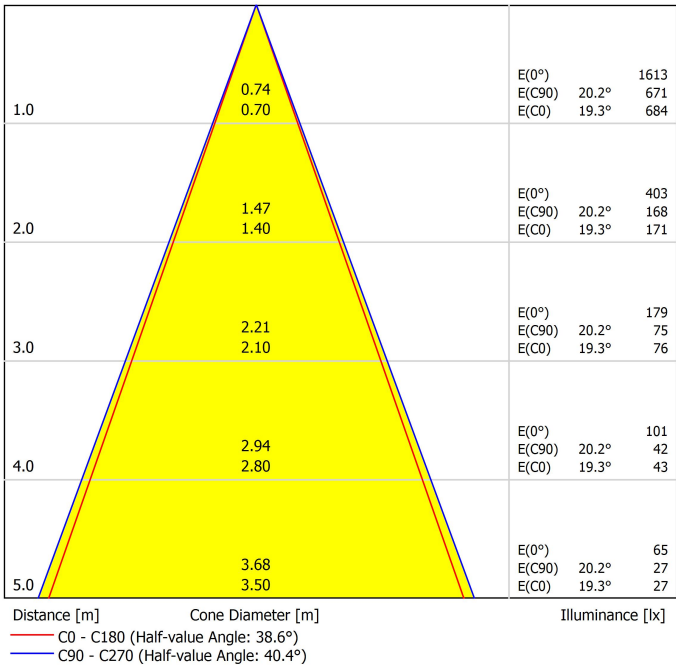

UGR

Valoración de deslumbramiento según UGR												
		70	70	50	50	30	70	70	50	50	30	
p. Techo		50 <td>30</td> <td>50</td> <td>30</td> <td>30</td> <td>50</td> <td>30</td> <td>50</td> <td>30</td> <td>30</td> <td></td>	30	50	30	30	50	30	50	30	30	
p. Paredes		50 <td>30</td> <td>50</td> <td>30</td> <td>30</td> <td>50</td> <td>30</td> <td>50</td> <td>30</td> <td>30</td> <td></td>	30	50	30	30	50	30	50	30	30	
p. Suelo		20	20	20	20	20	20	20	20	20	20	
Tamaño del local		Mirado en perpendicular al eje de lámpara					Mirado longitudinalmente al eje de lámpara					
X	Y											
2H	2H	-3.2	-2.6	-2.9	-2.4	-2.2	0.5	1.2	0.8	1.4	1.6	
	3H	-2.3	-1.8	-2.1	-1.5	-1.3	0.9	1.5	1.2	1.7	2.0	
	4H	-1.1	-0.5	-0.8	-0.3	-0.0	1.7	2.2	2.0	2.5	2.8	
	6H	1.1	1.6	1.5	1.9	2.2	3.4	3.9	3.7	4.1	4.4	
	8H	2.6	3.1	2.9	3.3	3.6	4.6	5.1	4.9	5.4	5.7	
4H	12H	4.3	4.7	4.6	5.0	5.4	6.1	6.6	6.5	6.9	7.2	
	2H	-3.1	-2.6	-2.8	-2.3	-2.0	0.4	1.0	0.7	1.2	1.5	
	3H	-1.7	-1.3	-1.4	-1.0	-0.7	1.1	1.6	1.4	1.9	2.2	
	4H	-0.0	0.4	0.4	0.7	1.0	2.2	2.6	2.6	3.0	3.3	
	6H	2.6	3.0	3.0	3.3	3.7	4.4	4.8	4.8	5.1	5.5	
8H	8H	4.3	4.6	4.7	5.0	5.4	5.9	6.2	6.4	6.6	7.0	
	12H	6.2	6.4	6.6	6.8	7.2	7.7	8.0	8.2	8.4	8.8	
	4H	0.9	1.2	1.3	1.6	2.0	2.7	3.0	3.1	3.4	3.8	
	6H	3.9	4.1	4.3	4.5	5.0	5.3	5.5	5.8	6.0	6.4	
	8H	5.7	5.9	6.2	6.3	6.8	7.1	7.2	7.5	7.7	8.1	
12H	12H	7.8	7.9	8.3	8.4	8.9	9.1	9.2	9.6	9.7	10.2	
	4H	1.3	1.5	1.7	1.9	2.4	2.9	3.2	3.3	3.6	4.0	
	6H	4.4	4.6	4.9	5.0	5.5	5.6	5.8	6.1	6.2	6.7	
	8H	6.3	6.5	6.8	6.9	7.4	7.5	7.6	8.0	8.1	8.6	
Variación de la posición del espectador para separaciones S entre luminarias												
S = 1.0H		+0.7 / -0.3					+1.3 / -0.4					
S = 1.5H		+1.4 / -0.5					+2.7 / -0.7					
S = 2.0H		+2.4 / -0.8					+4.2 / -1.0					
Tabla estándar												---
Sumando de corrección												---
Índice de deslumbramiento corregido en relación a 690lm Flujo luminoso total												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

