




### Dimensions



### Accessories

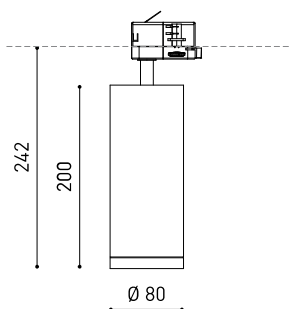

ANTI-GLARE HONEYCOMB  
LOUVER



TRACK 3L OPTIONS

### PRODUCT

|           |                      |
|-----------|----------------------|
| Name      | FIT 80 SPOT 3000K NT |
| Reference | A3570111NT           |
| Color     | Textured black       |
| RAL       | 9005                 |
| Category  | TRACK LIGHTS         |

### LIGHT SOURCE

|                         |                 |
|-------------------------|-----------------|
| Type                    | LED             |
| Gross luminous flux     | 2500 lm         |
| Colour temperature      | 3000 K          |
| Chromatic stability     | MacAdam Step 2  |
| Colour Rendering Index  | CRI>90          |
| Power                   | 19 W            |
| Current                 | 550 mA          |
| Efficacy                | 132 lm/W        |
| LED lifespan            | L90B10 >55.000h |
| Energy efficiency class | E               |

### LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |     |
|---------------------|-----|
| Lighting efficiency | 90% |
| Light beam angle    | 19° |

### LIGHTING FIXTURE | ELECTRICAL DATA

|                             |          |
|-----------------------------|----------|
| Driver                      | Included |
| Power values of the system  | 21,57 W  |
| Frequency                   | 50/60 Hz |
| Dimming                     | No Dim   |
| Electrical insulation class | ⚡        |


### OTHER DATA

|                      |                           |
|----------------------|---------------------------|
| Sealing              | IP20                      |
| Wireless control     | Please Consult            |
| Swivel angle         | 90°                       |
| Rotation angle       | 360°                      |
| Track type           | Track 3L+N                |
| Weight               | 970 g                     |
| Packaged weight      | 1100 g                    |
| Packaging dimensions | 325 x 135 x 96 mm         |
| Units per package    | 1                         |
| Materials            | Aluminium / Polycarbonate |





Fit, is a spotlight for triphasic track applicatios available in two versions (Ø80 and Ø65). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

Polar diagram

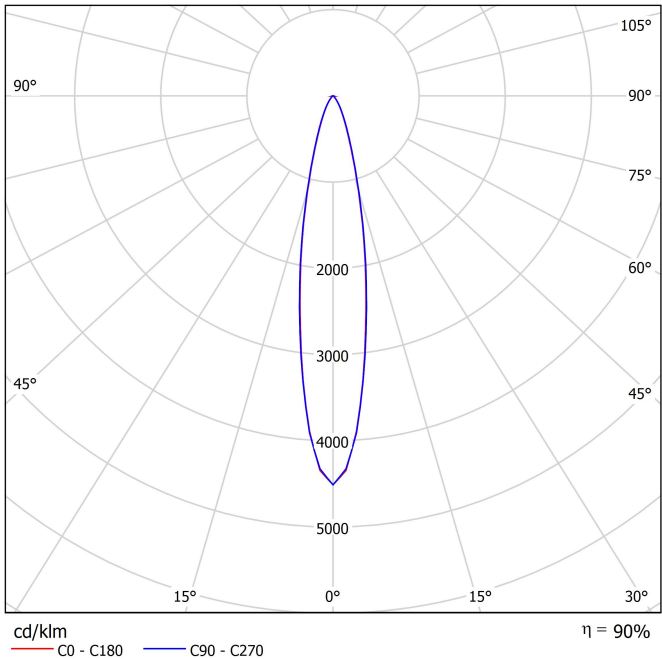

Conical diagram

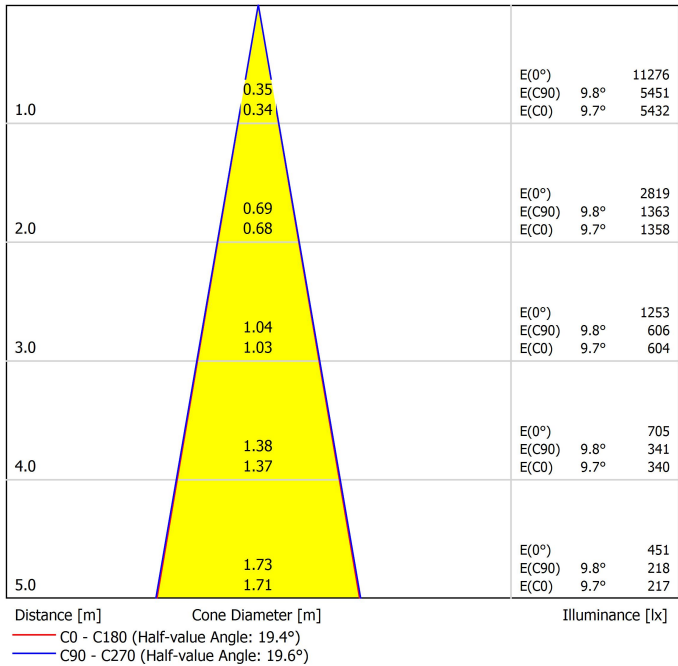



| PRODUCT              |                             |
|----------------------|-----------------------------|
| Model                | Anti-glare Honeycomb Louver |
| Reference            | A3570000                    |
| Category             | Accessories                 |
| NOT SOLD SEPARATELY. |                             |




**Anti-glare Honeycomb Louver**

Accessory featuring a honeycomb structure designed to control the light beam, reduce glare, and prevent direct exposure to the light source.

Track Options

Choose the track version required for your project configuration.



Surface & suspension




|             |             |   |   |
|-------------|-------------|---|---|
| TRACK 3L 1m | A282-01-00- | B | N |
| TRACK 3L 2m | A282-02-00- | B | N |
| TRACK 3L 3m | A282-03-00- | B | N |



Flush mounting\*



|                   |             |   |   |
|-------------------|-------------|---|---|
| TRACK 3L FLUSH 1M | A282-11-00- | B | N |
| TRACK 3L FLUSH 2M | A282-12-00- | B | N |
| TRACK 3L FLUSH 3M | A282-13-00- | B | N |

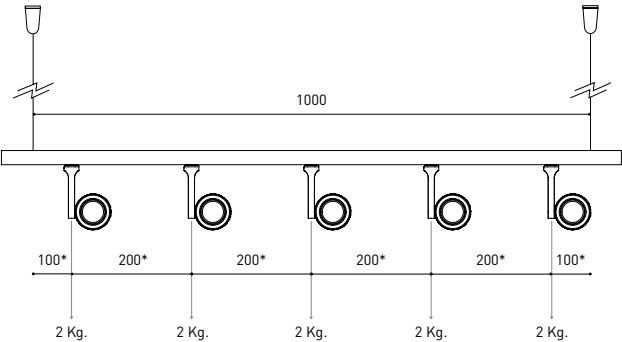

\*minimum distance (mm.)

WEIGHT BEAR CAPACITY

Distancia de fijación y capacidad de carga.  
Distancia de fijación recomendada l- 1000mm.

Fastening distance and loading capacity.  
Recommended fastening distance l- 1000mm.

Distance de fixation et capacité de charge.  
Distance de fixation recommandée l- 1000mm.

Distanza di installazione e capacità di carico.  
Distanza consigliata di fissazione l- 1000mm.


Befestigungsabstand und Belastbarkeit.  
Empfohlener Abstand l- 1000mm.

Alternative installation accessories

Fit Model: accessory only available in black finish  
Six Model: accessories not available


TRACKLIGHT Recessed Adapter

|             |   |   |
|-------------|---|---|
| 0000-55-44- | W | I |
| 0000-55-40- | N | I |



TRACKLIGHT Surface Adapter

|             |   |   |
|-------------|---|---|
| 0000-55-43- | W | I |
| 0000-55-39- | N | I |




COLOUR | B ☐ RAL 9016 | N ☒ RAL 9005 |

## Complementary track accessories

Use end caps and joiners to connect, close, and finish your track setup.


### Surface & suspension



**TRACK 3L Live-End Connector**


A282-00-01- | B | N |

A282-00-02- | B | N |




**TRACK 3L Central Connector**

A282-00-03- | B | N |




**TRACK 3L Ceiling Kit**

A219-21-06- | B | N |



**TRACK 3L Universal Angle**


A282-00-15- | B | N |



**TRACK 3L 90° Angle**

A282-00-06- | B | N |


A282-00-07- | B | N |

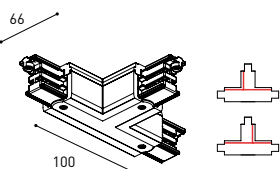

**TRACK 3L T Joint**


A282-00-16- | B | N |

A282-00-17- | B | N |



**TRACK 3L Mechanical Joint**

A219-21-11- | B | N |




**TRACK 3L Suspension Kit**

A219-21-10- | B | N |

At least 2 units needed

### Flush mounting



**TRACK 3L Live-End Connector**


A282-00-01- | B | N |

A282-00-02- | B | N |

**TRACK 3L FLUSH Cover Plate**

A282-10-19- | B | N |

Mandatory for installation




**TRACK 3L Central Connector**

A282-00-03- | B | N |

**TRACK 3L FLUSH Cover Plate**


A282-10-19- | B | N |

Mandatory for installation



**TRACK 3L FLUSH Ceiling Kit**

A219-22-06- | B |



**TRACK 3L 90° Angle**


A282-00-06- | B | N |

A282-00-07- | B | N |

**TRACK 3L FLUSH Corner Cover Plate**

A282-10-20- | B | N |

Mandatory for installation

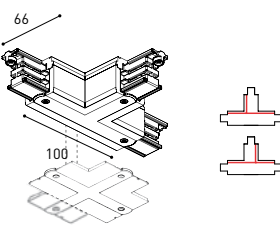

**TRACK 3L T Joint**

A282-00-16- | B | N |


A282-00-17- | B | N |

**TRACK 3L FLUSH Corner Cover Plate**

A282-10-20- | B | N |


Mandatory for installation

### Surface, suspension & flush mounting




**TRACK Contact Joint**

A282-00-04- | B | N |




**TRACK End**

A219-20-02- | B | N |



**TRACK Clamp Kit for M6 ROD**

A219-21-21- | B |



**TRACK Bending Tool**

A282-00-00

For tracks its lenght has been modified

COLOUR | B □ RAL 9016 | N ■ RAL 9005 |

Calle N, s/n - Pol. Ind. El Oliveral  
46394 Ribarroja del Turia-Valencia (Spain)  
info@arkoslight.com - www.arkoslight.com





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:


### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen

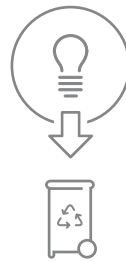

Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

