




Dimensions



| | |
|-----------|-----------------------------------------|
| Name | FOX MINI 3 DIM PUSH 2700K W |
| Reference | A2180320W |
| Colour | Matt white |
| RAL | Colour in the mass looks alike RAL 9016 |
| Category | CEILING RECESSED |

PRODUCT

| | |
|-------------------------|-----------------|
| Type | LED |
| Gross luminous flux | 1200 lm |
| Colour temperature | 2700 K |
| Chromatic stability | MacAdam Step 2 |
| Colour Rendering Index | CRI>90 |
| Power | 10 W |
| Current | 700 mA |
| Efficacy | 120 lm/W |
| LED lifespan | L80B10 >60.000h |
| Energy efficiency class | E |

LIGHT SOURCE

| | |
|---------------------|------|
| Lighting efficiency | 66% |
| Light beam angle | 111° |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|-----------------------------|----------------------|
| Driver | Included - Connected |
| Power values of the system | 12,89 W |
| Frequency | 50/60 Hz |
| Dimming | Push |
| Electrical insulation class | □ |

LIGHTING FIXTURE | ELECTRICAL DATA


| | |
|------------------------|------------------------------------|
| Sealing | IP54 |
| Wireless control | Please Consult |
| Emergency power supply | Please Consult |
| Impact resistance | IK10 |
| Recess measurements | Ø122 mm |
| Weight | 540 g |
| Packaged weight | 435,2 g |
| Packaging dimensions | 366 x 189 x 468 mm |
| Units per package | 1 |
| Materials | Polycarbonate / Polycarbonate-Matt |

OTHER DATA



Fox is the round recessed ceiling downlight with an extra-flat bezel. The discretion of its frame almost makes it appear trimless when switched on. Great water-tightness, resistant to impacts and corrosion. Suitable to be installed in places near the sea.

Polar diagram

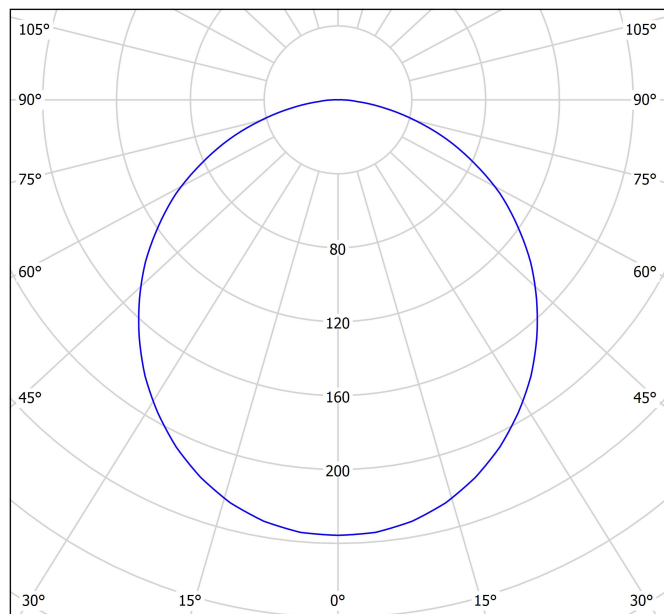

cd/klm
— C0 - C180 — C90 - C270

η = 66%

Conical diagram



Distance [m] Cone Diameter [m] Illuminance [lx]
— C0 - C180 (Half-value Angle: 110.4°)

UGR

Glare Evaluation According to UGR

| p Ceiling | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
|------------------------------------------------------------------|-----|---------------------------------------------------|------|------|------|------|--------------------------------------------|------|------|------|------|
| p Walls | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 |
| p Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 23.0 | 24.3 | 23.3 | 24.5 | 24.8 | 23.0 | 24.3 | 23.3 | 24.5 | 24.8 |
| | 3H | 24.7 | 25.9 | 25.0 | 26.2 | 26.4 | 24.7 | 25.9 | 25.0 | 26.2 | 26.4 |
| | 4H | 25.3 | 26.4 | 25.6 | 26.7 | 27.0 | 25.3 | 26.4 | 25.6 | 26.7 | 27.0 |
| | 6H | 25.7 | 26.7 | 26.1 | 27.0 | 27.4 | 25.7 | 26.7 | 26.1 | 27.0 | 27.4 |
| | 8H | 25.8 | 26.8 | 26.2 | 27.1 | 27.5 | 25.8 | 26.8 | 26.2 | 27.1 | 27.5 |
| 4H | 12H | 25.8 | 26.8 | 26.2 | 27.1 | 27.5 | 25.8 | 26.8 | 26.2 | 27.1 | 27.5 |
| | 2H | 23.5 | 24.7 | 23.9 | 25.0 | 25.3 | 23.5 | 24.7 | 23.9 | 25.0 | 25.3 |
| | 3H | 25.5 | 26.4 | 25.8 | 26.8 | 27.1 | 25.5 | 26.4 | 25.8 | 26.8 | 27.1 |
| | 4H | 26.2 | 27.1 | 26.6 | 27.4 | 27.8 | 26.2 | 27.1 | 26.6 | 27.4 | 27.8 |
| | 6H | 26.7 | 27.5 | 27.1 | 27.8 | 28.2 | 26.7 | 27.5 | 27.1 | 27.8 | 28.2 |
| 8H | 8H | 26.9 | 27.6 | 27.3 | 28.0 | 28.4 | 26.9 | 27.6 | 27.3 | 28.0 | 28.4 |
| | 12H | 27.0 | 27.6 | 27.4 | 28.0 | 28.4 | 27.0 | 27.6 | 27.4 | 28.0 | 28.4 |
| | 4H | 26.5 | 27.2 | 26.9 | 27.6 | 28.0 | 26.5 | 27.2 | 26.9 | 27.6 | 28.0 |
| | 6H | 27.1 | 27.7 | 27.6 | 28.1 | 28.6 | 27.1 | 27.7 | 27.6 | 28.1 | 28.6 |
| | 8H | 27.3 | 27.8 | 27.8 | 28.3 | 28.8 | 27.3 | 27.8 | 27.8 | 28.3 | 28.8 |
| 12H | 12H | 27.5 | 27.9 | 28.0 | 28.4 | 28.9 | 27.5 | 27.9 | 28.0 | 28.4 | 28.9 |
| | 4H | 26.5 | 27.1 | 26.9 | 27.5 | 28.0 | 26.5 | 27.1 | 26.9 | 27.5 | 28.0 |
| | 6H | 27.2 | 27.6 | 27.6 | 28.1 | 28.6 | 27.2 | 27.6 | 27.6 | 28.1 | 28.6 |
| | 8H | 27.4 | 27.8 | 27.9 | 28.3 | 28.8 | 27.4 | 27.8 | 27.9 | 28.3 | 28.8 |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H S = 1.5H S = 2.0H | | +0.1 / -0.1 +0.2 / -0.4 +0.4 / -0.7 | | | | | +0.1 / -0.1 +0.2 / -0.4 +0.4 / -0.7 | | | | |
| Standard table Correction Summand | | BK05 7.8 | | | | | BK05 7.8 | | | | |
| Corrected Glare Indices referring to 1200lm Total Luminous Flux | | | | | | | | | | | |

Corrected Glare Indices referring to 1200lm Total Luminous Flux



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

