



io / lui piano Einbauring mit cover

Montageanleitung



Occhio

Aufbau

Verstärkungsring / e

Deckenausschnitt:
Einbauring mit cover:
Ausschnitt: Ø 133 mm
Deckenstärke: 10–50 mm

piano Einbauring
Einbautiefe: 102 mm

cover rund
cover eckig

io / lui piano light unit
inkl. head

lui piano Einbauring mit cover

Ø 133 mm
10–50 mm

Runde Öffnung mit 133 mm Durchmesser herstellen. Deckenstärke: 10 mm bis max. 50 mm.

Malerarbeiten durchführen.

Achtung!
Vor der Montage alle stromführenden Leitungen vom Stromnetz trennen!

lui piano Einbauring mit cover

Verstärkungsring etwas zusammenbiegen, durch die Öffnung führen und auf den Rand der Öffnung legen.

230 V AC
Netzanschlussleitung

Treiber

Treiber anschließen (siehe Beiblatt zum Treiber): Treiber nach Schema an die Netzleitung anschließen.

Technische Hinweise des jeweiligen Herstellers beachten!

lui piano Einbauring mit cover

Leuchtekabel mit Treiber verbinden.

Schwarz = Pluspol,
Weiß = Minuspol

Einbauring in die Öffnung einsetzen.

3 Schrauben der Krallen anziehen. Festen Halt des Einbauring überprüfen!

Der Einbauring ist nun fertig montiert.

Weitere Installation: Siehe Montageanleitung light unit.

Occhio


www.occhio.com



010404295697359110

io / lui piano Mounting ring with cover

Mounting instructions



mounting


+

light unit




Occhio


Configuration




Reinforcing ring / s




Ceiling cut-out:
Mounting ring with cover:
Cut-out: Ø 133 mm
Ceiling thickness: 10–50 mm



piano mounting ring
Installation depth: 102 mm




cover round
cover square




io / lui piano light unit
incl. head



lui piano mounting ring with cover



Create a circular opening with a 133 mm diameter. Ceiling thickness: 10 mm to max. 50 mm.


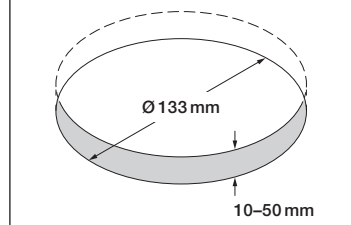


Carry out any painting and decorating work.




Caution!
Before fitting, disconnect all currentcarrying lines from the mains supply.

lui piano mounting ring with cover

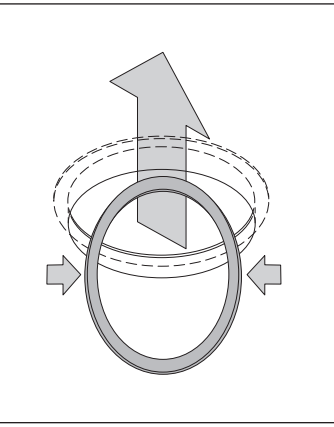



Squeeze the reinforcing ring together slightly, guide it through the opening and place it on the edge of the opening.

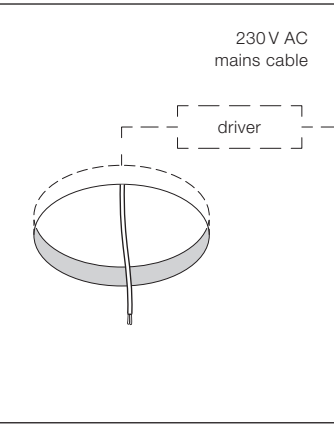

Connecting the driver (see supplementary sheet for the driver):
Connect the driver to the mains cable in accordance with the diagram.

Observe the technical instructions of the particular manufacturer.

lui piano mounting ring with cover

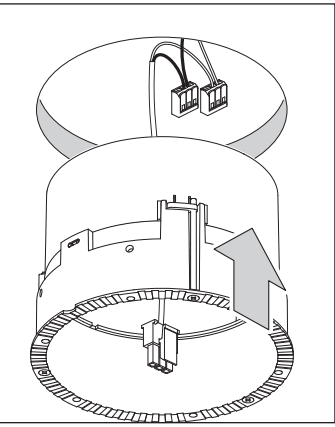

Connect luminaire cable with driver.


Black = positive pole
White = negative pole

Insert the mounting ring in the opening.



Secure with 3 screws. Check that the mounting ring is held in place firmly.

The mounting ring is now fully assembled!

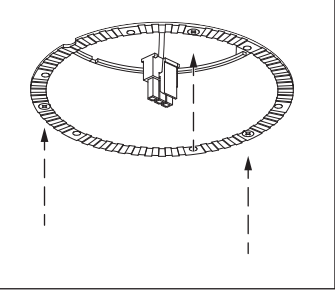

Proceed to: see mounting instructions light unit.

Occhio

www.occhio.com

