



io / lui piano v Einbauplatte

Montageanleitung




Occhio

Aufbau


Ausschnitt:
> 200 x 200 mm

Einbauplatte
200 x 200 mm
Dicke: 12,5 mm

Einbautiefe: 80 mm





io / lui piano v seamless light unit
inkl. head



Montage Einbauplatte



230 V AC
Netzanschlussleitung



Deckenausschnitt im Format
> 200 x 200 mm herstellen.


**Treiber anschließen (siehe Beiblatt
zum Treiber):** Treiber nach Schema
an die Netzleitung anschließen.

Technische Hinweise des jeweiligen
Herstellers beachten!
schwarz = Pluspol / weiß = Minuspol



Achtung!
Der Hersteller weist ausdrücklich
darauf hin, dass eine nicht fach-
gerecht installierte Einbauplatte
herabfallen kann und eine erheb-
liche Gefahr darstellt!


Montage Einbauplatte



Schutzinsatz in die Öffnung
einsetzen.

Fugen verputzen.

Darauf achten, dass die Innen-
seite des Montagerings nicht
verschmutzt wird.



Malerarbeiten ausführen.

Darauf achten, dass die Innen-
seite des Montagerings nicht
verschmutzt wird.

Schutzinsatz entfernen.

Putz-/Farbreste auf der Innenfläche
des Einbaurings ggf. mit feinem
Schleifpapier entfernen.

**Weitere Installation: Siehe
Montageanleitung light unit.**


Occhio

Occhio GmbH
Wiener Platz 7
81667 München
Fon +49-89-44 77 86 30
info@occhio.de
www.occhio.de



io / lui piano v mounting board

Mounting instructions




Occhio

Configuration


Cut-out:
> 200 x 200 mm

Mounting board
200 x 200 mm
Thickness: 12,5 mm


installation depth: 80 mm

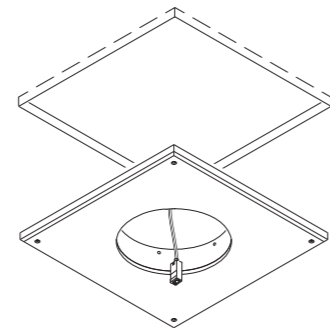

io / lui piano v seamless light unit
incl. head

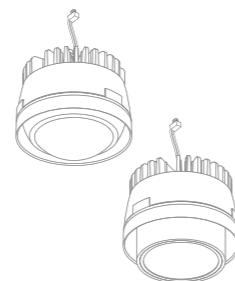


Fitting the mounting board

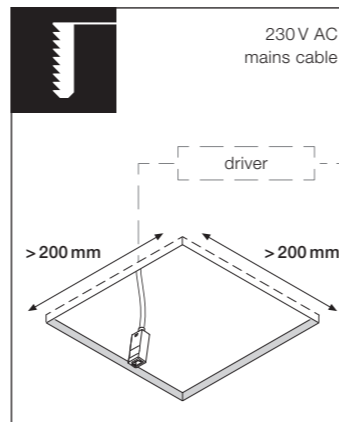

230 V AC
mains cable

driver

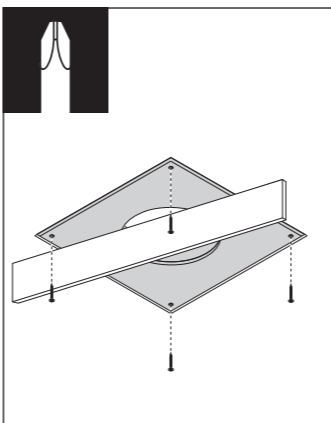

Prepare a ceiling cut-out
> 200 x 200 mm in size.

Connecting the driver (see supplementary sheet for the driver):
Connect the driver to the mains cable in accordance with the diagram.

Observe the technical instructions of the particular manufacturer.

Black = positive pole, white = negative pole


Correctly fit the mounting board in the opening so it is flush. Do so using the designated drill holes. Should the plate be fixed in any other position, pre-drill holes before screwing in place so as to avoid damaging the mounting board.



Caution!

The manufacturer cannot stress strongly enough that if the mounting board has not been properly fitted, it may fall, thereby posing a significant danger.


Fitting the mounting board

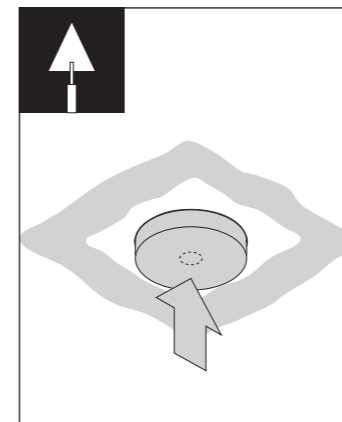

Place the protective insert in the opening.

Plaster over the joins.

Ensure that the inside of the mounting ring is clean.

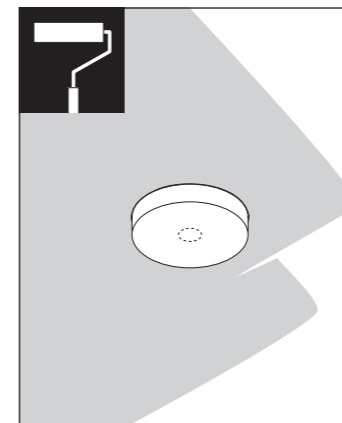

Carry out any painting and decorating work.

Ensure that the inside of the mounting ring is clean.

Remove the protective insert.

If necessary, remove any residual plaster/paint from the inside of the mounting ring using fine sandpaper.

Proceed to: see mounting instructions light unit.

Occhio

Occhio GmbH
Wiener Platz 7
81667 München
Fon +49-89-44 77 86 30
Fax +49-89-44 77 86 39
info@occhio.de
www.occhio.de



010404295697366910