


Black Foster Surface

ARKOSLIGHT



Dimensions

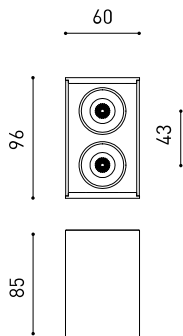

PRODUCT

| | |
|-----------|--------------------------------------|
| Name | BLACK FOSTER SURF 2 FLOOD 3500K NTMG |
| Reference | A3202013NTMG |
| Color | Textured black-Metallized gold |
| RAL | Metallic finish |
| Category | SURFACE |

LIGHT SOURCE

| | |
|-------------------------|------------------|
| Type | LED |
| Gross luminous flux | 460 lm |
| Colour temperature | 3500 K |
| Chromatic stability | MacAdam Step 3 |
| Colour Rendering Index | CRI>90 |
| Power | 4,2 W |
| Current | 700 mA |
| Efficacy | 110 lm/W |
| LED lifespan | L90B10 >102.000h |
| Energy efficiency class | F |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|---------------------|-----|
| Lighting efficiency | 92% |
| Light beam angle | 38° |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|-----------------------------|----------|
| Driver | Included |
| Power values of the system | 6,27 W |
| Frequency | 50/60 Hz |
| Dimming | No Dim |
| Electrical insulation class | □ |

OTHER DATA

| | |
|----------------------|---|
| Sealing | IP20 |
| Weight | 390 g |
| Packaged weight | 440 g |
| Packaging dimensions | 175 x 93 x 70 mm |
| Units per package | 1 |
| Materials | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |




Awards




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

Polar diagram

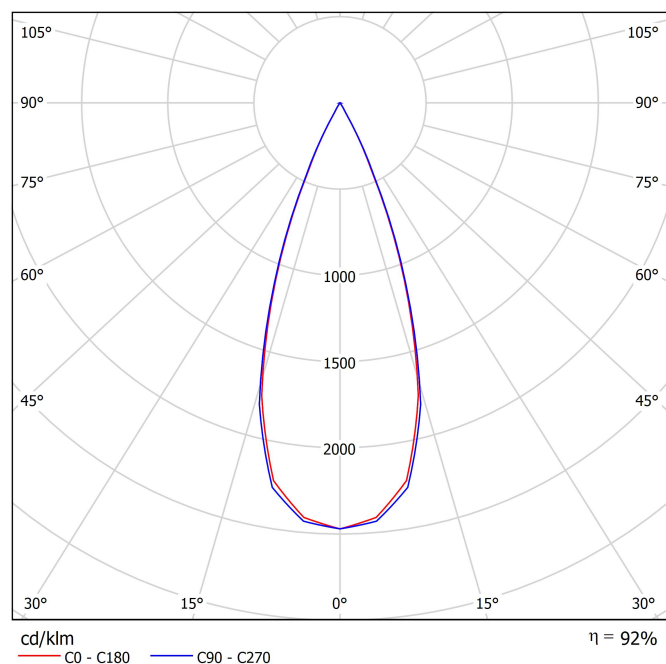

Conical diagram

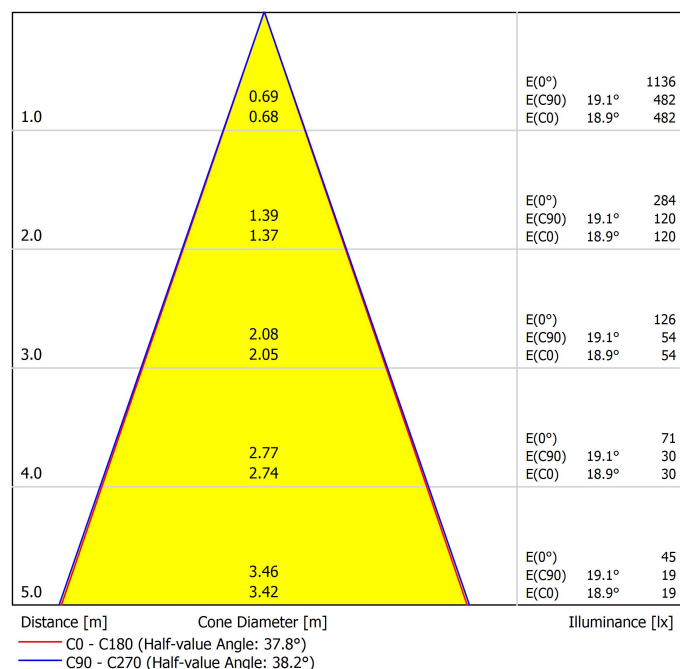

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | | |
|--|-----|---|------|------|------|------|--|------|------|------|------|--|
| p Ceiling | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| p Walls | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| p Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | | |
| 2H | 2H | -10.1 | -9.4 | -9.8 | -9.3 | -9.1 | -9.7 | -9.1 | -9.5 | -8.9 | -8.7 | |
| | 3H | -5.1 | -4.5 | -4.8 | -4.3 | -4.0 | -4.8 | -4.2 | -4.5 | -4.0 | -3.8 | |
| | 4H | -2.2 | -1.6 | -1.9 | -1.4 | -1.1 | -1.7 | -1.2 | -1.4 | -0.9 | -0.7 | |
| | 6H | 1.3 | 1.8 | 1.7 | 2.1 | 2.4 | 1.6 | 2.1 | 1.9 | 2.3 | 2.6 | |
| | 8H | 3.2 | 3.7 | 3.5 | 4.0 | 4.3 | 3.3 | 3.8 | 3.7 | 4.1 | 4.4 | |
| | 12H | 5.2 | 5.6 | 5.5 | 5.9 | 6.2 | 5.3 | 5.7 | 5.6 | 6.0 | 6.4 | |
| 4H | 2H | -8.5 | -7.9 | -8.2 | -7.7 | -7.4 | -8.2 | -7.7 | -7.9 | -7.4 | -7.2 | |
| | 3H | -3.3 | -2.8 | -2.9 | -2.5 | -2.2 | -3.1 | -2.6 | -2.7 | -2.3 | -2.0 | |
| | 4H | -0.3 | 0.1 | 0.1 | 0.5 | 0.8 | 0.1 | 0.5 | 0.4 | 0.8 | 1.1 | |
| | 6H | 3.3 | 3.6 | 3.7 | 4.0 | 4.3 | 3.4 | 3.8 | 3.8 | 4.1 | 4.5 | |
| | 8H | 5.2 | 5.4 | 5.6 | 5.8 | 6.2 | 5.3 | 5.6 | 5.7 | 5.9 | 6.3 | |
| | 12H | 7.2 | 7.5 | 7.6 | 7.9 | 8.3 | 7.3 | 7.6 | 7.7 | 8.0 | 8.4 | |
| 8H | 4H | 1.1 | 1.4 | 1.5 | 1.8 | 2.2 | 1.3 | 1.6 | 1.7 | 2.0 | 2.4 | |
| | 6H | 4.7 | 4.9 | 5.2 | 5.4 | 5.8 | 4.8 | 5.1 | 5.3 | 5.5 | 5.9 | |
| | 8H | 6.7 | 6.9 | 7.2 | 7.4 | 7.8 | 6.8 | 7.0 | 7.3 | 7.4 | 7.9 | |
| | 12H | 8.9 | 9.1 | 9.4 | 9.5 | 10.0 | 9.0 | 9.2 | 9.5 | 9.6 | 10.1 | |
| 12H | 4H | 1.6 | 1.8 | 2.0 | 2.2 | 2.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.8 | |
| | 6H | 5.3 | 5.4 | 5.7 | 5.9 | 6.4 | 5.4 | 5.5 | 5.8 | 6.0 | 6.5 | |
| | 8H | 7.4 | 7.5 | 7.9 | 8.0 | 8.5 | 7.4 | 7.6 | 7.9 | 8.0 | 8.5 | |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | | |
| S = 1.0H S = 1.5H S = 2.0H | | +0.5 / -0.3 +1.1 / -0.5 +1.9 / -0.8 | | | | | +0.6 / -0.3 +1.3 / -0.5 +2.3 / -0.8 | | | | | |
| Standard table | | --- | | | | | --- | | | | | |
| Correction | | --- | | | | | --- | | | | | |
| Summand | | --- | | | | | --- | | | | | |
| Corrected Glare Indices referring to 460lm Total Luminous Flux | | | | | | | | | | | | |



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

