




Dimensions

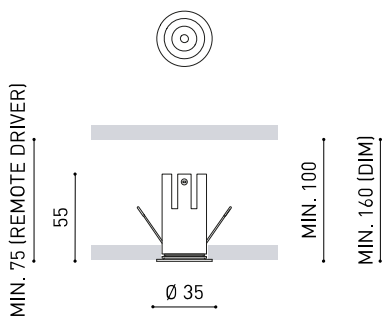

Name	NANO RECESSED FLOOD 2700K N
Reference	A5390110N
Colour	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

Type	LED
Gross luminous flux	570 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	5,5 W
Current	250 mA
Efficacy	104 lm/W
LED lifespan	L80B10 >55.000h
Energy efficiency class	F

Lighting efficiency	84%
Light beam angle	34°

Driver	Included - Connected
Power values of the system	7,04 W
Frequency	50/60 Hz
Dimming	No Dim - Other DIM, please consult
Electrical insulation class	<input type="checkbox"/>

Sealing	IP20
Emergency power supply	Please Consult
Recess measurements	Ø30 mm
Weight	75 g
Packaged weight	105 g
Packaging dimensions	155 x 60 x 45 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA




Nano is an exercise in formal synthesis that redraws the boundaries of technical lighting, offering maximum light output with minimum use of raw materials. Nano is an evolution of the downlight because of its basic and compact design. It provides up to 640 lumens from a compact body.

## Polar diagram

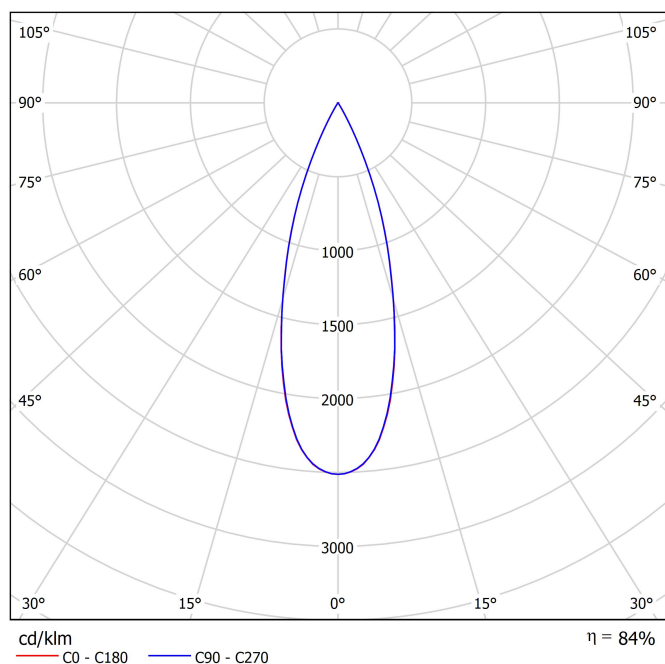

## Conical diagram

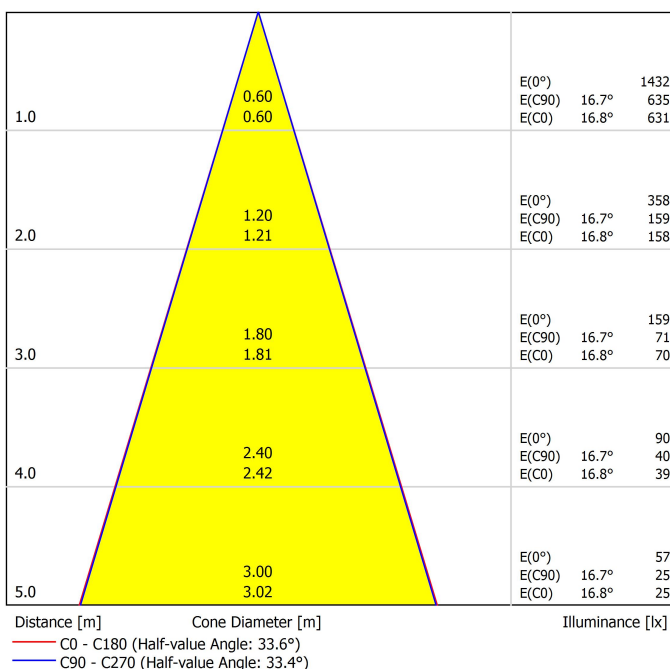

## UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	0.6	1.3	0.9	1.5	1.7	0.6	1.3	0.9	1.4	1.6	1.6
	3H	2.8	3.4	3.1	3.6	3.8	2.9	3.5	3.1	3.7	3.9	3.9
	4H	4.0	4.6	4.3	4.8	5.1	4.1	4.6	4.4	4.8	5.1	5.1
	6H	5.2	5.7	5.5	6.0	6.3	5.3	5.8	5.6	6.1	6.3	6.3
	8H	5.8	6.2	6.1	6.5	6.8	5.8	6.3	6.2	6.6	6.9	6.9
4H	12H	6.5	6.9	6.8	7.2	7.5	6.6	7.0	6.9	7.3	7.6	7.6
	2H	1.3	1.9	1.6	2.1	2.4	1.3	1.9	1.6	2.1	2.4	2.4
	3H	3.7	4.2	4.1	4.5	4.8	3.8	4.3	4.1	4.6	4.9	4.9
	4H	5.2	5.6	5.6	5.9	6.3	5.2	5.6	5.5	5.9	6.2	6.2
	6H	6.6	6.9	7.0	7.3	7.7	6.6	6.9	7.0	7.3	7.7	7.7
8H	8H	7.3	7.5	7.7	7.9	8.3	7.3	7.6	7.7	8.0	8.4	8.4
	12H	8.1	8.3	8.5	8.7	9.2	8.1	8.4	8.6	8.8	9.2	9.2
	4H	5.7	6.0	6.1	6.4	6.8	5.7	6.0	6.1	6.4	6.8	6.8
	6H	7.4	7.6	7.8	8.0	8.4	7.3	7.6	7.8	8.0	8.4	8.4
	8H	8.2	8.3	8.6	8.8	9.2	8.2	8.4	8.7	8.8	9.3	9.3
12H	12H	9.2	9.3	9.7	9.8	10.3	9.3	9.4	9.7	9.9	10.3	10.3
	4H	5.8	6.1	6.2	6.5	6.9	5.8	6.1	6.2	6.5	6.9	6.9
	6H	7.6	7.7	8.0	8.2	8.7	7.5	7.7	8.0	8.2	8.6	8.6
	8H	8.4	8.6	8.9	9.1	9.5	8.5	8.6	9.0	9.1	9.6	9.6
Variation of the observer position for the luminaire distances S												
S = 1.0H S = 1.5H S = 2.0H		+2.7 / -0.9 +4.8 / -1.2 +6.6 / -1.6					+2.4 / -0.7 +4.4 / -1.0 +6.1 / -1.3					
Standard table		BK05					---					
Correction Summand		-7.1					---					
Corrected Glare Indices referring to 570lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

