




Dimensions



Awards



PRODUCT

Name	PUCK M 4000K NT
Reference	A2511002NT
Colour	Textured black
RAL	9005
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	880 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	10 W
Efficacy	88 lm/W
LED lifespan	L70B10 >50.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	75%
Light beam angle	38°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	12,00 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	⚡


OTHER DATA

Sealing	IP20
Weight	315 g
Packaged weight	360 g
Packaging dimensions	112 x 100 x 60 mm
Units per package	1
Materials	Aluminium / Optical Glass




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

Polar diagram

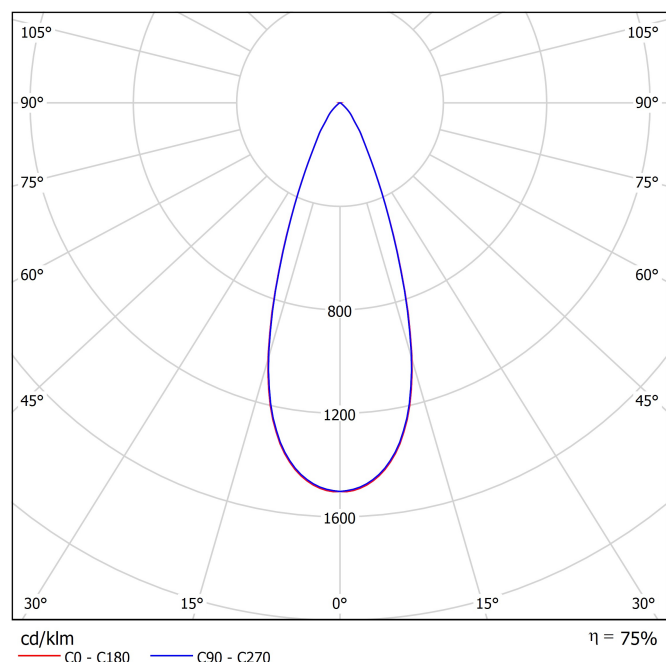


Conical diagram

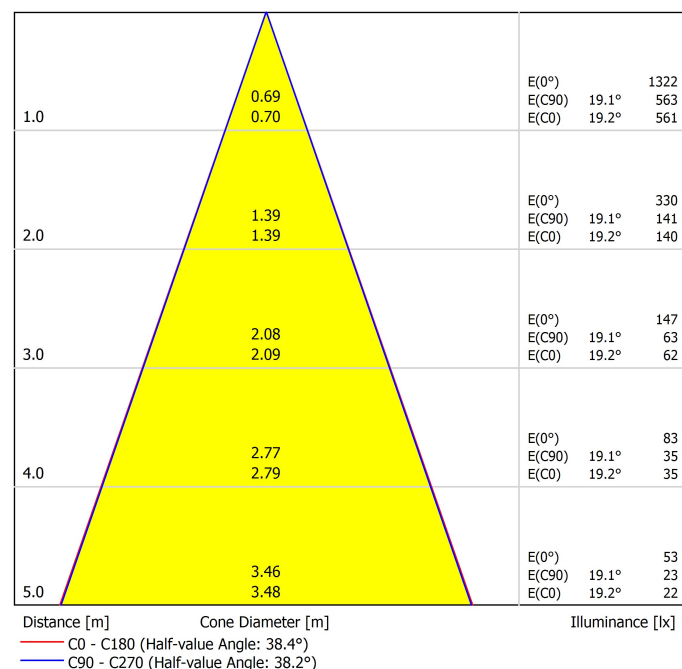

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	9.1	9.8	9.3	10.0	10.2	9.1	9.8	9.4	10.0	10.2	
	3H	10.3	11.0	10.6	11.2	11.4	10.3	11.0	10.6	11.2	11.5	
	4H	11.5	12.1	11.8	12.4	12.6	11.5	12.2	11.8	12.4	12.7	
	6H	12.3	12.9	12.7	13.2	13.5	12.4	12.9	12.7	13.2	13.5	
	8H	12.6	13.2	12.9	13.4	13.7	12.7	13.2	13.0	13.5	13.8	
4H	12H	12.8	13.4	13.2	13.7	14.0	12.9	13.4	13.3	13.7	14.0	
	2H	9.3	10.0	9.6	10.2	10.5	9.4	10.0	9.7	10.2	10.5	
	3H	11.1	11.6	11.4	11.9	12.2	11.1	11.6	11.5	11.9	12.2	
	4H	12.5	13.0	12.9	13.3	13.6	12.5	13.0	12.9	13.3	13.7	
	6H	13.5	13.9	13.9	14.3	14.6	13.5	13.9	13.9	14.3	14.7	
8H	8H	13.9	14.2	14.3	14.6	15.0	13.9	14.2	14.3	14.6	15.0	
	12H	14.2	14.5	14.6	14.9	15.3	14.2	14.5	14.7	14.9	15.3	
	4H	13.0	13.3	13.4	13.7	14.1	13.0	13.3	13.4	13.7	14.1	
	6H	14.2	14.4	14.6	14.8	15.3	14.2	14.4	14.6	14.8	15.3	
	8H	14.6	14.8	15.1	15.3	15.7	14.6	14.9	15.1	15.3	15.8	
12H	12H	15.0	15.2	15.5	15.6	16.1	15.1	15.2	15.6	15.7	16.2	
	4H	13.1	13.3	13.5	13.7	14.2	13.1	13.4	13.5	13.8	14.2	
	6H	14.3	14.5	14.7	14.9	15.4	14.3	14.5	14.7	14.9	15.4	
	8H	14.8	14.9	15.2	15.4	15.9	14.8	15.0	15.3	15.4	15.9	
	Variation of the observer position for the luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+2.1 / -2.3 +4.3 / -2.8 +6.1 / -3.3					+2.2 / -2.3 +4.3 / -2.8 +6.1 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-1.4					-1.4					
Corrected Glare Indices referring to 880lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:


Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:


Anweisungen zur entsorgung der Leuchtenkomponenten:




Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

