


# Puck Recessed

# ARKOSLIGHT



## Dimensions

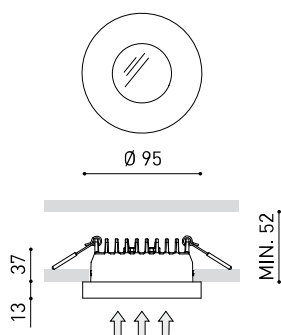

## Awards



## PRODUCT

Name	PUCK RECESSED L 3000K NT
Reference	A3132011NT
Colour	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHT SOURCE

Type	LED
Gross luminous flux	1610 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	12 W
Current	350 mA
Efficacy	134 lm/W
LED lifespan	L90B10 >55.000h
Energy efficiency class	E

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	82%
Light beam angle	47°

## LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included - Connected
Power values of the system	14,15 W
Frequency	50/60 Hz
Dimming	No Dim - Other DIM, please consult
Electrical insulation class	□


## OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	Ø86 mm
Weight	516 g
Packaged weight	580 g
Packaging dimensions	192 x 161 x 61 mm
Units per package	1
Materials	Aluminium / Optical Glass




Puck Recessed is the Puck version for recessed applications. Puck Recessed aims to fulfill the functions of general lighting. Its discreet presence takes the shape of a circular piece, totally made of aluminium, with a slight rounded slant to hold the light source back a few centimetres.

Polar diagram

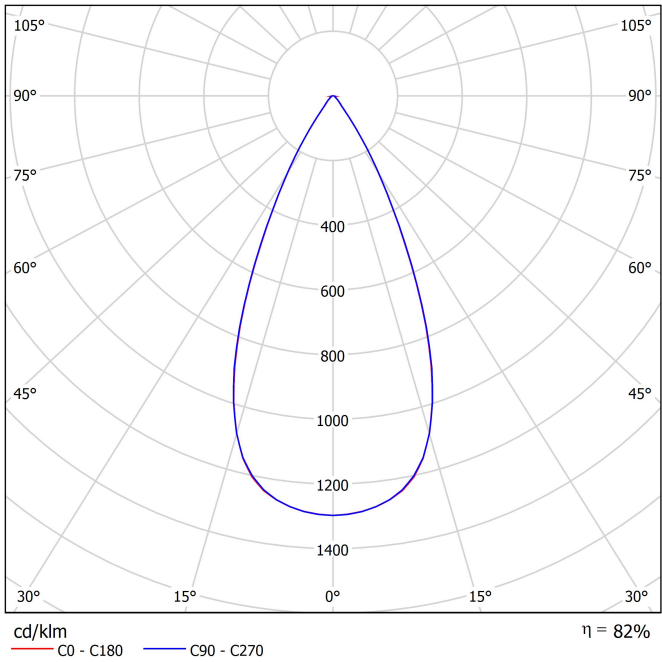

Conical diagram

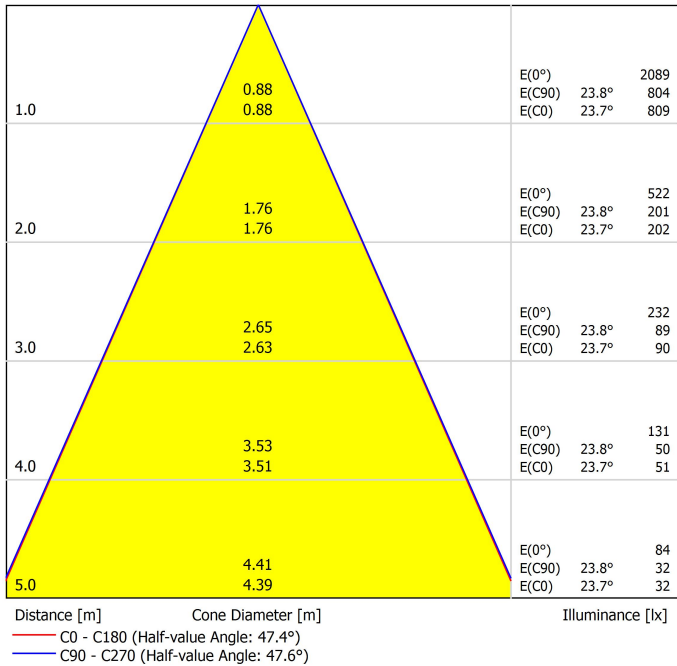

UGR

Glare Evaluation According to UGR																
		70	70	50	50	30	70	70	50	50	30					
p Ceiling		50	30	50	30	30	50	30	50	30	30					
p Walls		50	30	50	30	30	50	30	50	30	30					
p Floor		20	20	20	20	20	20	20	20	20	20					
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis									
2H	2H	8.1	8.8	8.4	9.0	9.2	7.5	8.2	7.8	8.4	8.6					
	3H	10.5	11.2	10.8	11.4	11.6	10.3	10.9	10.5	11.1	11.4					
	4H	12.0	12.6	12.3	12.9	13.1	11.6	12.2	11.9	12.4	12.7					
	6H	12.9	13.5	13.2	13.8	14.0	12.5	13.1	12.8	13.3	13.6					
	8H	13.5	14.0	13.8	14.3	14.6	12.9	13.5	13.3	13.8	14.1					
4H	12H	13.9	14.4	14.2	14.7	15.0	13.3	13.8	13.7	14.1	14.4					
	2H	8.6	9.2	8.9	9.5	9.8	8.1	8.7	8.4	9.0	9.2					
	3H	11.7	12.2	12.0	12.5	12.8	11.5	12.0	11.8	12.3	12.6					
	4H	13.3	13.7	13.6	14.0	14.4	12.9	13.3	13.3	13.6	14.0					
	6H	14.3	14.6	14.7	15.0	15.4	13.9	14.3	14.3	14.6	15.0					
8H	8H	14.9	15.2	15.3	15.6	16.0	14.4	14.8	14.9	15.1	15.5					
	12H	15.4	15.7	15.8	16.1	16.5	14.9	15.2	15.3	15.6	16.0					
	4H	13.7	14.1	14.2	14.4	14.8	13.4	13.8	13.9	14.1	14.5					
	6H	14.9	15.2	15.4	15.6	16.0	14.7	14.9	15.1	15.3	15.8					
	8H	15.7	15.9	16.2	16.4	16.8	15.3	15.5	15.8	16.0	16.4					
12H	12H	16.4	16.5	16.9	17.0	17.5	15.9	16.1	16.4	16.5	17.0					
	4H	13.8	14.1	14.2	14.5	14.9	13.5	13.8	13.9	14.2	14.6					
	6H	15.1	15.3	15.6	15.7	16.2	14.8	15.0	15.3	15.5	15.9					
	8H	15.9	16.1	16.4	16.6	17.1	15.6	15.7	16.0	16.2	16.7					
Variation of the observer position for the luminaires distances S																
S = 1.0H		+2.7 / -1.1					+2.9 / -1.2									
S = 1.5H		+4.8 / -1.4					+5.0 / -1.6									
S = 2.0H		+6.6 / -1.7					+6.9 / -1.8									
Standard table		BK04					BK04									
Correction Summand		-3.4					-3.5									
Corrected Glare Indices referring to 1610lm Total Luminous Flux																



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

## Instructions on end-of-life and component disposal:

## Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

## Istruzioni per il fine vita e lo smaltimento dei componenti:

## Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

