




Dimensions



Name	REC OUTDOOR DOUBLE 3000K GT
Reference	A5170011GT
Colour	Textured grey
RAL	7021
Category	OUTDOOR

Type	LED
Gross luminous flux	1810 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	12 W
Current	900 mA
Efficacy	150 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D

Lighting efficiency	44%
Light beam angle	114°

Driver	Included
Power values of the system	14,67 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	□

Sealing	IP65
Outdoor Use	Yes
Weight	1075 g
Packaged weight	1,16 g
Packaging dimensions	299 x 135 x 52 mm
Units per package	1
Materials	Aluminium / Polycarbonate

PRODUCT

REC OUTDOOR DOUBLE 3000K GT

A5170011GT

Textured grey

7021

OUTDOOR

LIGHT SOURCE

LED

1810 lm

3000 K

MacAdam Step 2

CRI>90

12 W

900 mA

150 lm/W

L80B10 >60.000h

D

LIGHTING FIXTURE | PHOTOMETRIC DATA

44%

114°

LIGHTING FIXTURE | ELECTRICAL DATA

Included

14,67 W

50/60 Hz

No Dim

□

OTHER DATA

IP65

Yes

1075 g

1,16 g

299 x 135 x 52 mm


1

Aluminium / Polycarbonate




Distinguished by its proportionality and geometry, the Rec collection discovers - and conquers - the outdoors. This new outdoor wall washer retains the slender complexion of the interior wall fixture with a 180° projection that bathes ceiling and walls. It is available in two versions depending on the source of the light, in a unidirectional version, with an upward or downward option, and in a Double version, unique for its bidirectional flow. In both, its lighting is ambient and deeply pleasant.

Polar diagram

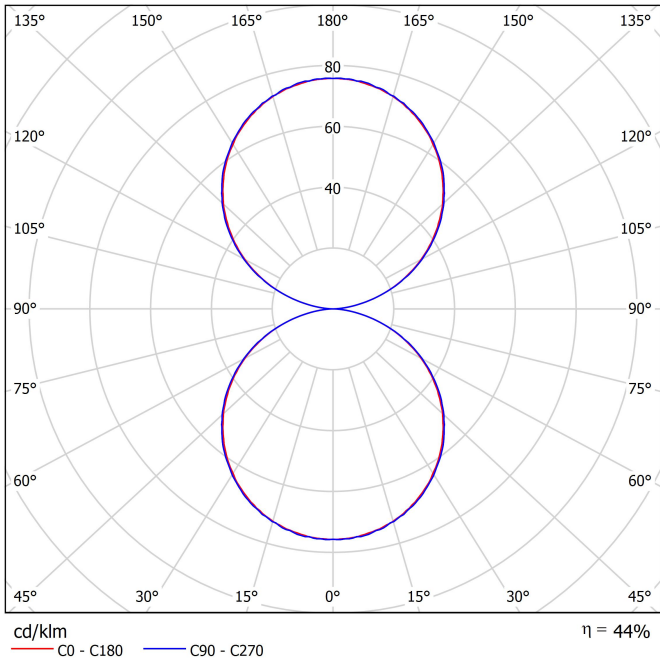

Conical diagram

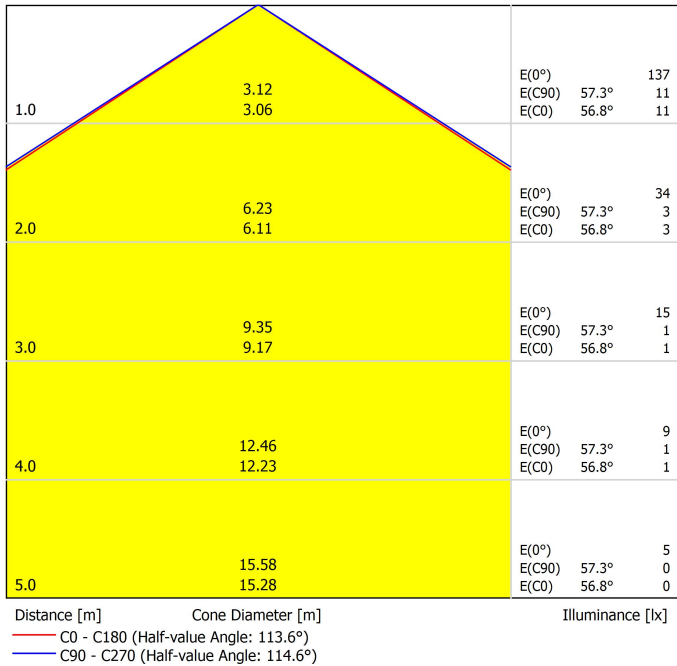

UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	15.3	16.1	16.2	17.0	18.1	15.4	16.2	16.2	17.1	18.2	
	3H	17.0	17.7	17.9	18.6	19.8	17.0	17.8	17.9	18.7	19.8	
	4H	17.6	18.2	18.5	19.1	20.3	17.6	18.3	18.5	19.2	20.4	
	6H	17.9	18.5	18.9	19.5	20.7	18.0	18.6	18.9	19.5	20.7	
	8H	18.0	18.6	19.0	19.6	20.8	18.1	18.7	19.0	19.6	20.8	
	12H	18.1	18.6	19.0	19.6	20.8	18.1	18.7	19.1	19.6	20.8	
4H	2H	15.7	16.4	16.6	17.3	18.5	15.8	16.4	16.7	17.4	18.5	
	3H	17.6	18.1	18.5	19.1	20.3	17.6	18.2	18.6	19.1	20.4	
	4H	18.3	18.8	19.3	19.7	21.0	18.3	18.8	19.3	19.8	21.0	
	6H	18.8	19.2	19.8	20.2	21.5	18.8	19.2	19.8	20.2	21.5	
	8H	18.9	19.3	19.9	20.3	21.6	18.9	19.3	19.9	20.3	21.6	
	12H	19.0	19.3	20.0	20.3	21.6	19.0	19.4	20.0	20.4	21.7	
8H	4H	18.5	18.8	19.5	19.8	21.1	18.5	18.9	19.5	19.9	21.2	
	6H	19.1	19.4	20.1	20.4	21.7	19.1	19.4	20.1	20.4	21.7	
	8H	19.3	19.5	20.3	20.6	21.9	19.3	19.6	20.3	20.6	21.9	
	12H	19.4	19.6	20.4	20.7	22.0	19.4	19.6	20.4	20.7	22.0	
12H	4H	18.4	18.8	19.4	19.8	21.1	18.5	18.8	19.5	19.8	21.1	
	6H	19.1	19.3	20.1	20.4	21.7	19.1	19.4	20.1	20.4	21.7	
	8H	19.3	19.5	20.4	20.6	21.9	19.3	19.6	20.4	20.6	22.0	
Variation of the observer position for the luminaires distances S												
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H		+0.2 / -0.3					+0.2 / -0.3					
S = 2.0H		+0.4 / -0.7					+0.4 / -0.7					
Standard table		BK06					BK06					
Correction Summand		-1.1					-1.1					
Corrected Glare Indices referring to 1810lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

