


### Dimensions



### Accessories

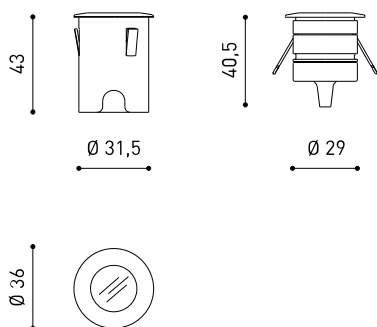

DRIVER OPTIONS

### PRODUCT

|           |                 |
|-----------|-----------------|
| Name      | STEP S 2700K NX |
| Reference | A3920000NX      |
| Color     | Stainless steel |
| Category  | OUTDOOR         |

### LIGHT SOURCE

|                         |                  |
|-------------------------|------------------|
| Type                    | LED              |
| Gross luminous flux     | 100 lm           |
| Colour temperature      | 2700 K           |
| Chromatic stability     | MacAdam Step 3   |
| Colour Rendering Index  | CRI>90           |
| Power                   | 1 W              |
| Current                 | 350 mA           |
| Efficacy                | 100 lm/W         |
| LED lifespan            | L90B10 >102.000h |
| Energy efficiency class | F                |

### LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |      |
|---------------------|------|
| Lighting efficiency | 10%  |
| Light beam angle    | 112° |

### LIGHTING FIXTURE | ELECTRICAL DATA

|                             |                                    |
|-----------------------------|------------------------------------|
| Driver                      | Excluded: Must be placed on remote |
| Dimming                     | No Dim - Other DIM, please consult |
| Electrical insulation class | II                                 |


### OTHER DATA

|                             |  |
|-----------------------------|--|
| Sealing                     | IP65   |
| Wireless control            | Please Consult   |
| Impact resistance           | IK06   |
| Recess measurements         | Ø32 mm   |
| Outdoor Use                 | Yes  |
| Maximum surface temperature | 40°  |
| Supported load              | 5000   |
| Weight                      | 60 g   |
| Packaged weight             | 87 g   |
| Packaging dimensions        | 67 x 63 x 60 mm  |
| Units per package           | 1  |
| Materials                   | Stainless Steel (AISI 304) / Aluminium / Polymethyl Methacrylate |





Step is a floor-recessed luminaire for signage functions. Discrete, elegant and functional, it offers the technical features of a leaktight LED luminaire that is able to support weight loads. It is applicable in pedestrian transit areas, both outdoors and indoors. Other outstanding features are its small size, low consumption and considerable durability. A technical film, in blue or white finish, on the illuminated Step surface, helps prevent the LED point from being marked and makes the colour more homogeneous. Step can be installed horizontally or vertically. \*\*\* NOTE: Recessed box included


Polar diagram

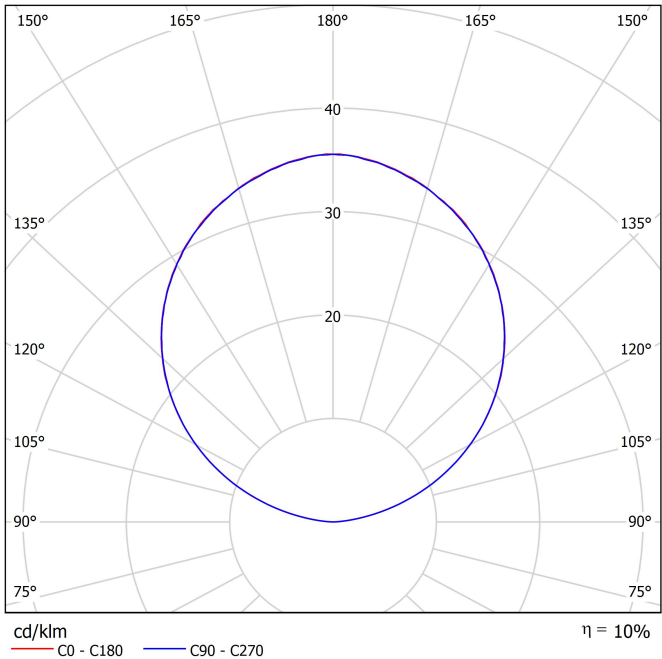

Conical diagram

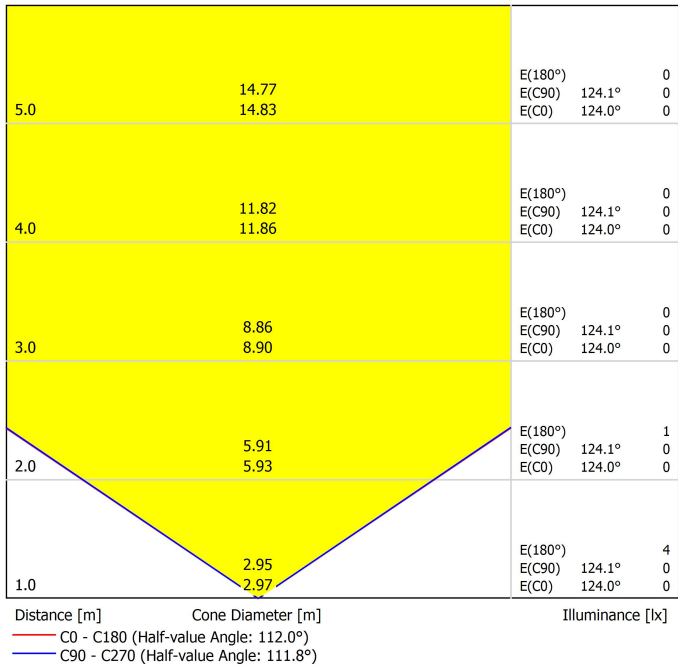



| DRIVER OPTIONS   |            | P  | I     |              |
|--|------------|--|-------|--------------|
|  ON/OFF | 0434-00-39 | 1W   | 350mA | 1 to 12 Step |
| 220<br>240 V~  | IP20       | Higher IP & DIM drivers please consult   Driver must be placed on remote |       |              |



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

