




## Dimensions



## Awards



## PRODUCT

Name	STRAM 1 4000K WT
Reference	A1970112WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHT SOURCE

Type	LED
Gross luminous flux	1675 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	10,5 W
Current	350 mA
Efficacy	160 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	87%
Light beam angle	99°

## LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included - Connected
Power values of the system	12,40 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	□


## OTHER DATA

Sealing	IP43
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK07
Recess measurements	Ø205 mm
Weight	1090 g
Packaged weight	1255,1 g
Packaging dimensions	332 x 245 x 84 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Ceiling recessed downlight, with a prominent bezel and textured finish, for general lighting functions with diffuse light. Its differentiated aesthetics provide distinction in spaces where it is fitted, considerably different to the traditional round downlight.

## Polar diagram

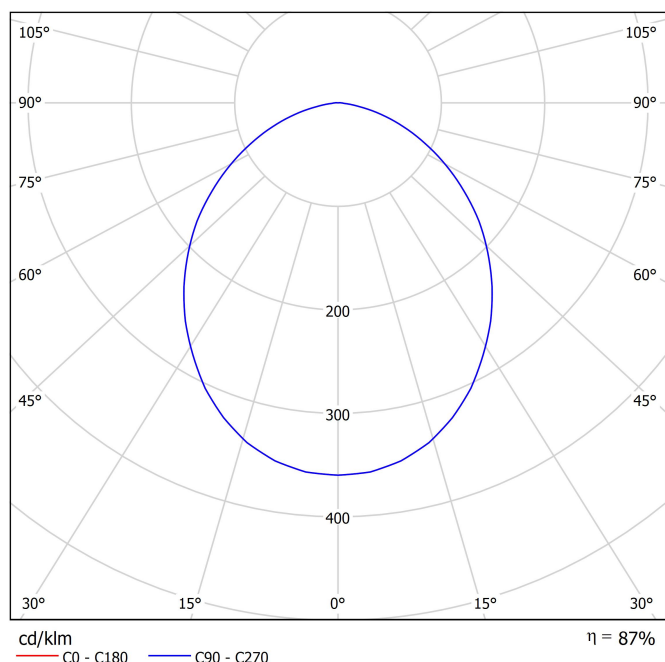

## Conical diagram

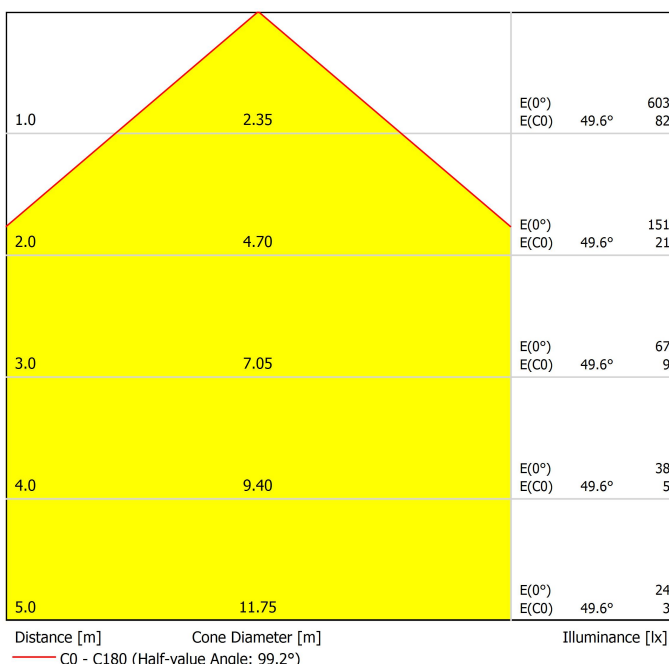

## UGR

### Glare Evaluation According to UGR

Room Size	X	Y	20	30	50	70	100	150	200	300	500	700	1000	1500	2000	3000	5000	7000	10000
2H	2H	20.5	21.8	20.8	22.0	22.2	20.5	21.8	20.8	22.0	22.2	20.5	21.8	20.8	22.0	22.2	20.5	21.8	20.8
3H	3H	22.0	23.1	22.3	23.4	23.6	22.0	23.1	22.3	23.4	23.6	22.0	23.1	22.3	23.4	23.6	22.0	23.1	22.3
4H	4H	22.4	23.5	22.8	23.8	24.1	22.4	23.5	22.8	23.8	24.1	22.4	23.5	22.8	23.8	24.1	22.4	23.5	22.8
6H	6H	22.7	23.7	23.1	24.0	24.3	22.7	23.7	23.1	24.0	24.3	22.7	23.7	23.1	24.0	24.3	22.7	23.7	23.1
8H	8H	22.7	23.7	23.1	24.0	24.3	22.7	23.7	23.1	24.0	24.3	22.7	23.7	23.1	24.0	24.3	22.7	23.7	23.1
12H	12H	22.8	23.7	23.1	24.0	24.3	22.8	23.7	23.1	24.0	24.3	22.8	23.7	23.1	24.0	24.3	22.8	23.7	23.1
4H	2H	21.0	22.1	21.3	22.3	22.6	21.0	22.1	21.3	22.3	22.6	21.0	22.1	21.3	22.3	22.6	21.0	22.1	21.3
3H	3H	22.7	23.6	23.0	23.9	24.2	22.7	23.6	23.0	23.9	24.2	22.7	23.6	23.0	23.9	24.2	22.7	23.6	23.0
4H	4H	23.3	24.0	23.6	24.4	24.8	23.3	24.0	23.6	24.4	24.8	23.3	24.0	23.6	24.4	24.8	23.3	24.0	23.6
6H	6H	23.6	24.3	24.0	24.7	25.1	23.6	24.3	24.0	24.7	25.1	23.6	24.3	24.0	24.7	25.1	23.6	24.3	24.0
8H	8H	23.7	24.3	24.1	24.7	25.1	23.7	24.3	24.1	24.7	25.1	23.7	24.3	24.1	24.7	25.1	23.7	24.3	24.1
12H	12H	23.7	24.3	24.2	24.7	25.1	23.7	24.3	24.2	24.7	25.1	23.7	24.3	24.2	24.7	25.1	23.7	24.3	24.2
8H	4H	23.5	24.1	23.9	24.5	24.9	23.5	24.1	23.9	24.5	24.9	23.5	24.1	23.9	24.5	24.9	23.5	24.1	23.9
6H	6H	23.9	24.4	24.3	24.8	25.3	23.9	24.4	24.3	24.8	25.3	23.9	24.4	24.3	24.8	25.3	23.9	24.4	24.3
8H	8H	24.0	24.5	24.5	24.9	25.4	24.0	24.5	24.5	24.9	25.4	24.0	24.5	24.5	24.9	25.4	24.0	24.5	24.5
12H	12H	24.1	24.4	24.6	24.9	25.4	24.1	24.4	24.6	24.9	25.4	24.1	24.4	24.6	24.9	25.4	24.1	24.4	24.6
12H	4H	23.5	24.0	23.9	24.4	24.9	23.5	24.0	23.9	24.4	24.9	23.5	24.0	23.9	24.4	24.9	23.5	24.0	23.9
6H	6H	23.9	24.4	24.4	24.8	25.3	23.9	24.4	24.4	24.8	25.3	23.9	24.4	24.4	24.8	25.3	23.9	24.4	24.4
8H	8H	24.0	24.4	24.5	24.9	25.4	24.0	24.4	24.5	24.9	25.4	24.0	24.4	24.5	24.9	25.4	24.0	24.4	24.5

Corrected Glare Indices referring to 1675lm Total Luminous Flux



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

