




Dimensions



Accessories

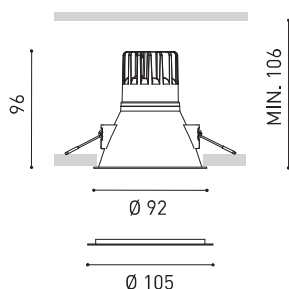

IP65 ACCESSORY



ADD-ON BEZEL



FLAT SPRING ACCESSORY

Awards



reddot design award
winner 2015



| | |
|-----------|-------------------|
| Name | SWAP L 5W 2700K G |
| Reference | A2123110G |
| Color | Gold |
| RAL | 1036 |
| Category | CEILING RECESSED |

PRODUCT

| | |
|-------------------------|-----------------|
| Type | LED |
| Gross luminous flux | 675 lm |
| Colour temperature | 2700 K |
| Chromatic stability | MacAdam Step 2 |
| Colour Rendering Index | CRI>90 |
| Power | 5 W |
| Current | 150 mA |
| Efficacy | 135 lm/W |
| LED lifespan | L90B10 >55.000h |
| Energy efficiency class | E |

LIGHT SOURCE

| | |
|---------------------|-----|
| Lighting efficiency | 77% |
| Light beam angle | 40° |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|-----------------------------|------------------------------------|
| Driver | Included - Fast Connect |
| Power values of the system | 5,83 W |
| Frequency | 50/60 Hz |
| Dimming | No Dim - Other DIM, please consult |
| Electrical insulation class | □ |

LIGHTING FIXTURE | ELECTRICAL DATA


| | |
|------------------------|---------------------------|
| Sealing | IP20 |
| Wireless control | Please Consult |
| Emergency power supply | Please Consult |
| Impact resistance | IK07 |
| Recess measurements | Ø85 mm |
| Weight | 245 g |
| Packaged weight | 292,5 g |
| Packaging dimensions | 104 x 108 x 109 mm |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |

OTHER DATA




Swap is a ceiling recessed LED spotlight whose main features are its minimalist aspect, its perfect integration into the ceiling, and considerable visual comfort, thanks to the small reflector that is set back with respect to the ceiling plane. When it is switched on, its matte finish shade generates an attractive effect, a discrete circle of light. It includes an add-on bezel that can be used optionally to cover larger recess diameters.

Polar diagram

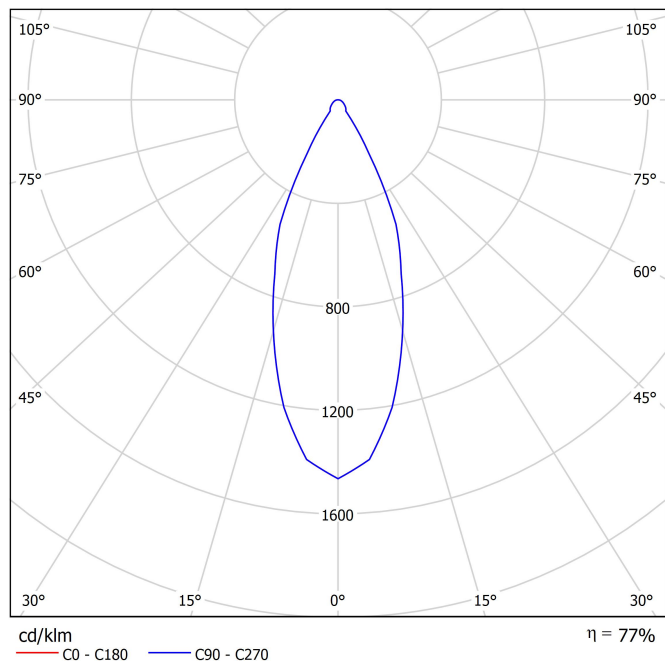


Conical diagram

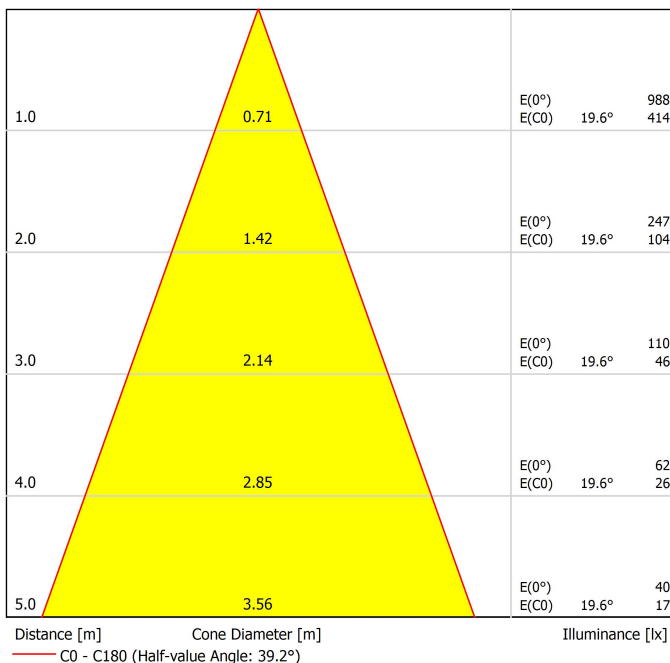

UGR

Glare Evaluation According to UGR

| p Ceiling | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
|--|-----|---|------|------|------|------|--|------|------|------|------|
| p Walls | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 |
| p Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 13.6 | 14.3 | 13.8 | 14.5 | 14.7 | 13.6 | 14.3 | 13.8 | 14.5 | 14.7 |
| | 3H | 15.4 | 16.1 | 15.7 | 16.3 | 16.6 | 15.4 | 16.1 | 15.7 | 16.3 | 16.6 |
| | 4H | 16.2 | 16.9 | 16.5 | 17.1 | 17.4 | 16.2 | 16.9 | 16.5 | 17.1 | 17.4 |
| | 6H | 17.0 | 17.6 | 17.3 | 17.9 | 18.1 | 17.0 | 17.6 | 17.3 | 17.9 | 18.1 |
| | 8H | 17.3 | 17.9 | 17.6 | 18.2 | 18.5 | 17.3 | 17.9 | 17.6 | 18.2 | 18.5 |
| 4H | 12H | 17.6 | 18.2 | 18.0 | 18.5 | 18.8 | 17.6 | 18.2 | 18.0 | 18.5 | 18.8 |
| | 2H | 14.2 | 14.8 | 14.5 | 15.1 | 15.3 | 14.2 | 14.8 | 14.5 | 15.1 | 15.3 |
| | 3H | 16.2 | 16.8 | 16.6 | 17.1 | 17.4 | 16.2 | 16.8 | 16.6 | 17.1 | 17.4 |
| | 4H | 17.2 | 17.7 | 17.6 | 18.0 | 18.4 | 17.2 | 17.7 | 17.6 | 18.0 | 18.4 |
| | 6H | 18.1 | 18.5 | 18.5 | 18.9 | 19.3 | 18.1 | 18.5 | 18.5 | 18.9 | 19.3 |
| 8H | 8H | 18.6 | 18.9 | 19.0 | 19.3 | 19.7 | 18.6 | 18.9 | 19.0 | 19.3 | 19.7 |
| | 12H | 19.0 | 19.3 | 19.4 | 19.7 | 20.1 | 19.0 | 19.3 | 19.4 | 19.7 | 20.1 |
| | 4H | 17.6 | 18.0 | 18.0 | 18.4 | 18.8 | 17.6 | 18.0 | 18.0 | 18.4 | 18.8 |
| | 6H | 18.7 | 19.0 | 19.2 | 19.4 | 19.9 | 18.7 | 19.0 | 19.2 | 19.4 | 19.9 |
| | 8H | 19.3 | 19.5 | 19.7 | 20.0 | 20.4 | 19.3 | 19.5 | 19.7 | 20.0 | 20.4 |
| 12H | 12H | 19.8 | 20.0 | 20.3 | 20.5 | 21.0 | 19.8 | 20.0 | 20.3 | 20.5 | 21.0 |
| | 4H | 17.7 | 18.0 | 18.1 | 18.4 | 18.8 | 17.7 | 18.0 | 18.1 | 18.4 | 18.8 |
| | 6H | 18.8 | 19.1 | 19.3 | 19.5 | 20.0 | 18.8 | 19.1 | 19.3 | 19.5 | 20.0 |
| | 8H | 19.5 | 19.7 | 19.9 | 20.1 | 20.6 | 19.5 | 19.7 | 19.9 | 20.1 | 20.6 |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | | +0.5 / -0.2 | | | | | +0.5 / -0.2 | | | | |
| S = 1.5H | | +1.1 / -0.4 | | | | | +1.1 / -0.4 | | | | |
| S = 2.0H | | +1.8 / -0.7 | | | | | +1.8 / -0.7 | | | | |
| Standard table | | BK07 | | | | | BK07 | | | | |
| Correction Summand | | 2.8 | | | | | 2.8 | | | | |
| Corrected Glare Indices referring to 675lm Total Luminous Flux | | | | | | | | | | | |

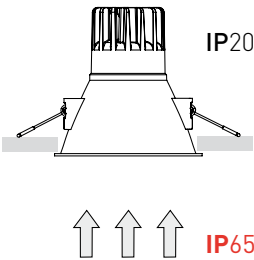

| PRODUCT | |
|--|------------------|
| Model | IP65 Accessory L |
| Reference | A2123065 W N |
| Category | Accessories |
| PRE-ASSEMBLED. NOT SOLD SEPARATELY. AFFECTS THE LIGHTING PARAMETERS. | |
|  44° | |

Swap IP65 accessory

To make the difference, Swap IP65 reaches a high sealing level, maintaining at the same time the same aesthetics as a standard Swap. The insulating property is obtained thanks to a protection placed just over the LED, and a silicone joint on the internal part of the bezel. In this way, the external aspect of Swap IP65 is identical to any other Swap IP20.



| | | |
|--|----------|---|
| | Model | Swap L Add-On Bezel |
| | Colour | W <input type="checkbox"/> Matt white |
| | Category | Accessories |



Add-on bezel

Accessory always included but for optional use.

It extends the piece's bezel to cover larger recesses, keeping Swap's minimalism and its perfect integration into the ceiling.

Easy to fit. Ideal for reforms to replace the light spot, with the already existing holes, without altering the ceiling or repainting. Swap is the best option for updating to LED technology by means of a real light fixture with incorporated LED, in contrast to just a retrofit lamp that only implies a less efficient update of the light source.



| | PRODUCT |
|-----------|--------------------|
| Model | Swap L Flat Spring |
| Reference | A2120000 |
| Category | Accessories |

Flat spring accessory

The springs “Flat Spring” is an accessory that replaces the fixing clamp system for recessed installations in cement ceilings. With Swap XL, L and M versions, the customer will receive a mounting kit wich will allow him to change the fixing clamps for the new system.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:


Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:


Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen

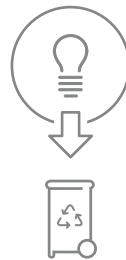

Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen

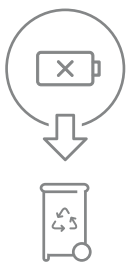

Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

