




Dimensions



Accessories

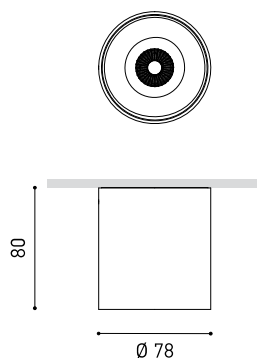

DRIVER OPTIONS

PRODUCT

Name	SHOT LIGHT M SURFACE 3500K NT
Reference	A3960013NT
Color	Textured black - Other colours, please consult
RAL	9005
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	695 / 955 / 1545 lm
Colour temperature	3500 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	4,5 / 6,5 / 12,4 W
Current	140 / 200 / 350 mA
Efficacy	154 / 147 / 125 lm/W
LED lifespan	L90B10 >55.000h
Energy efficiency class	E

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	86%
Light beam angle	38°


LIGHTING FIXTURE | ELECTRICAL DATA



Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI
Electrical insulation class	II

OTHER DATA

Sealing	IP20
Wireless control	Please Consult

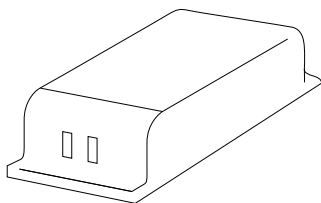A surface luminary conceived to be a discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.



DRIVER OPTIONS		I	P	K	Lm
 ON/OFF	0434-00-36	140mA	4,5W	2700K	660
				3000K	690
				4000K	700
	0434-00-37	200mA	6,5W	2700K	910
				3000K	940
				4000K	960
	0434-00-39	350mA	12,4W	2700K	1470
				3000K	1530
				4000K	1550
 DIM DALI	0434-00-79	350mA	12,4W	2700K	1470
				3000K	1530
				4000K	1550
				220 V~ 240 V~	



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

