


Shot Light Surface

ARKOSLIGHT



Dimensions

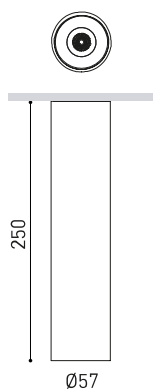

PRODUCT

Name	SHOT LIGHT S SURFACE 25 SPOT DIM DALI 2700K NT
Reference	A4930200NT
Color	Textured black
RAL	9005
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	620 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	6 W
Current	500 mA
Efficacy	103 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	86%
Light beam angle	23°

LIGHTING FIXTURE | ELECTRICAL DATA


Driver	Included
Power values of the system	8,01 W
Frequency	50/60 Hz
Dimming	DALI - Other DIM, please consult
Electrical insulation class	<input type="checkbox"/>

OTHER DATA


Sealing	IP20
Weight	420 g
Packaged weight	485 g
Packaging dimensions	270 x 79 x 79 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate



Polar diagram

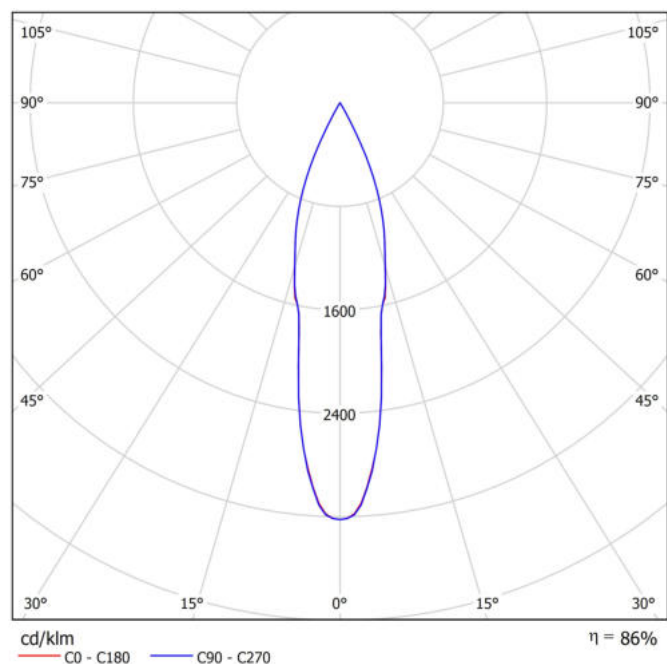


Conical diagram

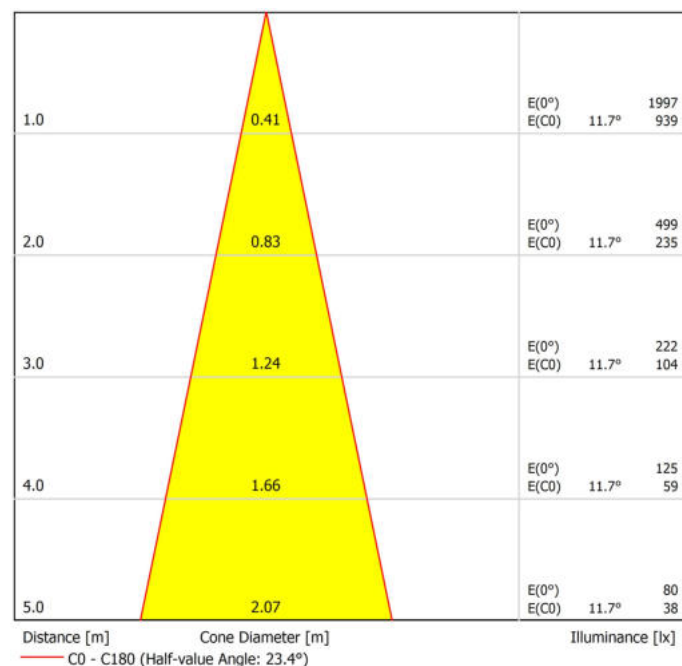

UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.7	-3.1	-3.5	-2.9	-2.7	-3.1	-2.5	-2.9	-2.3	-2.1	
	3H	-2.9	-2.4	-2.7	-2.1	-1.9	-2.5	-1.9	-2.2	-1.7	-1.4	
	4H	-2.2	-1.6	-1.9	-1.4	-1.1	-1.8	-1.2	-1.5	-1.0	-0.7	
	6H	-0.9	-0.4	-0.6	-0.2	0.1	-0.7	-0.2	-0.4	0.1	0.3	
	8H	-0.2	0.2	0.1	0.5	0.8	0.1	0.5	0.4	0.8	1.1	
	12H	0.6	1.0	0.9	1.3	1.7	1.2	1.6	1.5	1.9	2.3	
4H	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.1	-2.5	-2.8	-2.3	-2.0	
	3H	-2.5	-2.0	-2.1	-1.7	-1.4	-2.1	-1.7	-1.8	-1.4	-1.0	
	4H	-1.3	-1.0	-1.0	-0.6	-0.3	-1.0	-0.7	-0.7	-0.3	0.0	
	6H	0.2	0.5	0.6	0.9	1.3	0.3	0.7	0.7	1.0	1.4	
	8H	1.1	1.4	1.5	1.8	2.2	1.4	1.6	1.8	2.0	2.4	
	12H	2.1	2.4	2.6	2.8	3.2	2.7	3.0	3.2	3.4	3.8	
8H	4H	-0.8	-0.5	-0.4	-0.1	0.3	-0.6	-0.3	-0.1	0.1	0.5	
	6H	1.0	1.3	1.5	1.7	2.1	1.1	1.3	1.6	1.8	2.2	
	8H	2.1	2.3	2.6	2.8	3.2	2.4	2.6	2.9	3.0	3.5	
	12H	3.5	3.6	4.0	4.1	4.6	4.1	4.2	4.5	4.7	5.1	
12H	4H	-0.7	-0.4	-0.2	-0.0	0.4	-0.4	-0.2	0.0	0.2	0.6	
	6H	1.3	1.5	1.8	2.0	2.4	1.4	1.6	1.9	2.0	2.5	
	8H	2.6	2.7	3.0	3.2	3.7	2.8	3.0	3.3	3.4	3.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+1.5 / -0.5					+1.6 / -0.5					
S = 1.5H		+3.1 / -0.7					+3.2 / -0.7					
S = 2.0H		+4.6 / -1.0					+4.9 / -1.0					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 620lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

