




Dimensions



Accessories



FANCY SHAPE BASE
(MANDATORY)



CORD ACCESSORY



BEAM MIXER DIFFUSER



ANTI-GLARE HONEYCOMB
LOUVER

Awards



PRODUCT

Name	TOP FANCY SHAPE 2M 20° 3000K NT
Reference	A4270011NT
Color	Textured black
RAL	9005
Category	CUSTOM SYSTEMS

LIGHT SOURCE

Type	LED
Gross luminous flux	640 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	6,5 W
Current	700 mA
Efficacy	98 lm/W
LED lifespan	L90B10 >55.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	92%
Light beam angle	20°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded
Power values of the system	6,5 W
Dimming	No Dim / DALI
Electrical insulation class	II


OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Cord length	Max. 2 m
Fast adjustment tensioner	Yes
Weight	235 g
Packaged weight	280 g
Packaging dimensions	160 x 110 x 45 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Top Fancy Shape is a small downlight which can be distributed with complete freedom throughout the space by creating patterns and designs originating from a surface-mounted base. Top Fancy Shape is the only light available on the market which allows for a full light installation to be created from a single light source for spaces in which concealed lights are impossible. The cable can be moved along the ceiling thanks to small pistons which create vertices in the shape of the cable. The layout of these points can be freely chosen and designed by the user.

Polar diagram

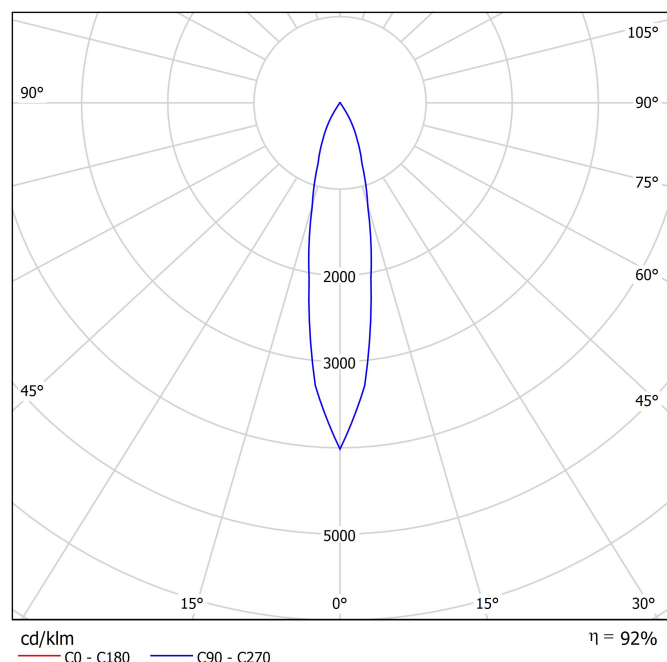

Conical diagram

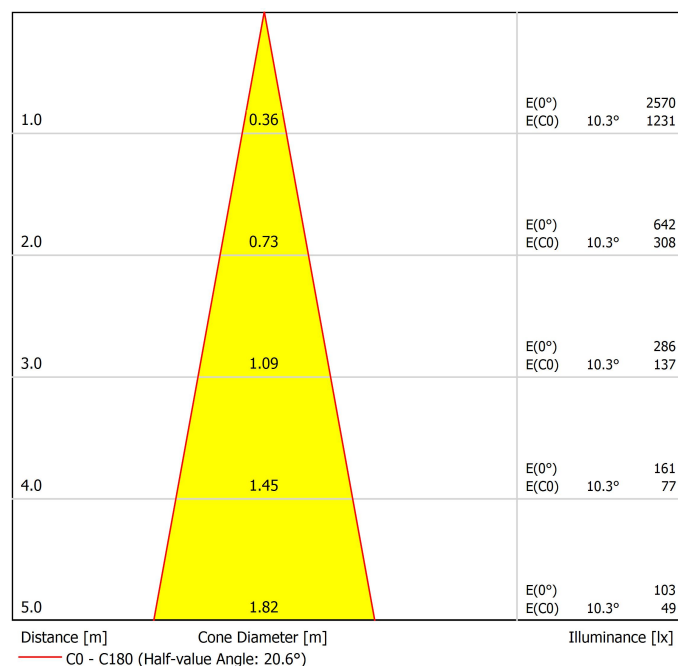


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	6.7	7.4	7.0	7.6	7.8	6.7	7.4	7.0	7.6	7.8	
	3H	10.3	10.9	10.6	11.1	11.4	10.3	10.9	10.6	11.1	11.4	
	4H	12.0	12.6	12.3	12.8	13.1	12.0	12.6	12.3	12.8	13.1	
	6H	13.7	14.3	14.1	14.5	14.8	13.7	14.3	14.1	14.5	14.8	
	8H	14.7	15.2	15.0	15.4	15.7	14.7	15.2	15.0	15.4	15.7	
4H	12H	15.7	16.2	16.0	16.5	16.8	15.7	16.2	16.0	16.5	16.8	
	2H	7.9	8.5	8.2	8.7	9.0	7.9	8.5	8.2	8.7	9.0	
	3H	11.6	12.1	11.9	12.4	12.7	11.6	12.1	11.9	12.4	12.7	
	4H	13.5	13.9	13.8	14.2	14.5	13.5	13.9	13.8	14.2	14.5	
	6H	15.3	15.7	15.7	16.0	16.4	15.3	15.7	15.7	16.0	16.4	
8H	8H	16.3	16.7	16.8	17.0	17.4	16.3	16.7	16.8	17.0	17.4	
	12H	17.5	17.7	17.9	18.1	18.6	17.5	17.7	17.9	18.1	18.6	
	4H	14.2	14.5	14.6	14.9	15.3	14.2	14.5	14.6	14.9	15.3	
	6H	16.3	16.5	16.8	17.0	17.4	16.3	16.5	16.8	17.0	17.4	
	8H	17.5	17.7	18.0	18.1	18.6	17.5	17.7	18.0	18.1	18.6	
12H	12H	18.8	19.0	19.3	19.5	20.0	18.8	19.0	19.3	19.5	20.0	
	4H	14.4	14.6	14.8	15.0	15.5	14.4	14.6	14.8	15.0	15.5	
	6H	16.6	16.8	17.1	17.2	17.7	16.6	16.8	17.1	17.2	17.7	
	8H	17.9	18.0	18.4	18.5	19.0	17.9	18.0	18.4	18.5	19.0	
	Variation of the observer position for the luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+2.3 / -0.7 +4.2 / -0.9 +6.0 / -1.1					+2.3 / -0.7 +4.2 / -0.9 +6.0 / -1.1					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 640lm Total Luminous Flux												


Fancy Shape base

ARKOSLIGHT



MANDATORY FOR INSTALLATION




FANCY SHAPE BASE 2 700 mA	1 to 2 lamps	NO DIM	A417-03-11	WT	NT
		DALI	A417-03-12	WT	NT
220 240 V~			2 Equidistant Fixing Points		



FANCY SHAPE BASE 6 700 mA	3 to 6 lamps	NO DIM	A417-03-21	WT	NT
		DALI	A417-03-22	WT	NT
220 240 V~			6 Equidistant Fixing Points		

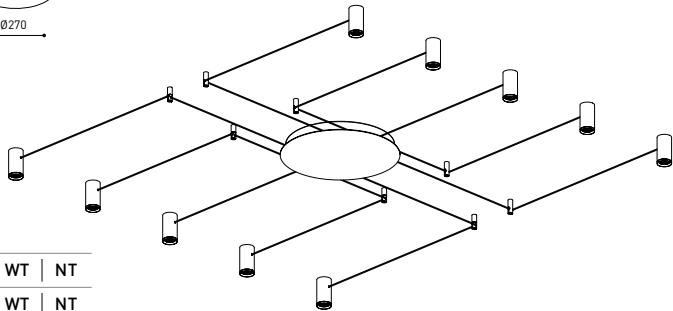

FANCY SHAPE BASE 12 700 mA	7 to 12 lamps	NO DIM	A417-03-31	WT	NT
		DALI	A417-03-32	WT	NT
220 240 V~			12 Equidistant Fixing Points		



NT



WT


ATTENTION

Fancy Shape Base NT: Base and Cap in Black.
Fancy Shape Base WT: Black Base and White Cap.
Luminaire Cable: Black in all finishes.



		PRODUCT
Model		Cord Accessory One Plane
Reference		0224-00-00 N
Colour		N ■ RAL9005
Category		Accessories

Dimmensional drawing





Model	Cord Accessory
Reference	0223-00-00 N
Colour	N ■ RAL9005
Category	Accessories

PRODUCT


Cord Accessory

0223-00-00 | N |

N ■ RAL9005

Accessories

Dimmensional drawing






PRODUCT	
Model	Beam Mixer Diffuser
Reference	08050100
Category	Accessories

NOT SOLD SEPARATELY.

Beam Mixer Diffuser

The beam mixer diffuser reduces irregularities and distortions caused by parabolic, Fresnel lenses, or TIR collimators, ensuring a more uniform light distribution without significantly increasing beam length.



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	08070000NT
Colour	NT ■ Textured black
Category	Accessories
NOT SOLD SEPARATELY.	



Anti-glare Honeycomb Louver

Accessory featuring a honeycomb structure designed to control the light beam, reduce glare, and prevent direct exposure to the light source.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

