



PERFORMANCE

Delivered Lumens 2400 lm
Power Consumption 30W
Luminous Efficacy 80lm/W
90 CRI
Full detail in [photometry summary](#)

CERTIFICATION

UL Listed
UL Listed to Canadian safety standards.
Suitable for Damp Locations

LED LIFESPAN

50k hours

SPECIFICATION LOGIC

PRIMARY FINISH

| | |
|----------------------|------|
| Matte White | PC20 |
| Silk Grey | PC25 |
| Ochre Yellow | PC26 |
| Matte Black | PC30 |
| Vermilion | PC42 |
| Custom Powder Coated | PCXX |

COLOR TEMPERATURE


| | |
|-----------------------|----|
| 2700K (warm white) | 27 |
| 3000K (soft white) | 30 |
| 3500K (neutral white) | 35 |
| 4000K (cool white) | 40 |

DIMMING / CONTROL / INPUT

| | |
|---|--------------|
| 0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 0.1_10V_UNV |
| 1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External) | 1_TRIAC_120V |
| 1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 1_10V_UNV |

DRAWINGS

CTF-18 Centro Flush Mount Dimension

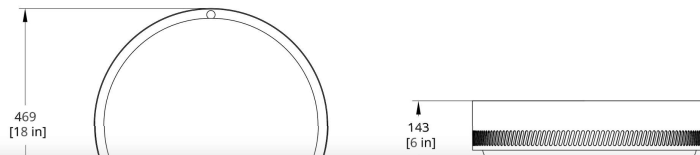

Centro Flush Mount

Ceiling Flush Mounts

YOUR PRODUCT CODE

CTFM- - - - -

DESCRIPTION

Centro, a sleek, circular fixture for both flushmount and pendant installation. With its slim profile and light-diffusing perforated edge, Centro possesses a subtle sophistication other fixtures don't.

Materials: powder coated steel, acrylic diffuser

Product Dimensions: 18 in dia x 6 in H

Product Weight: 4.6 kg

We value your privacy

We use cookies to enhance your browsing experience, serve personalised ads or content, and analyse our traffic. By clicking "Accept All", you consent to our use of cookies. [Cookie Policy](#)

CUSTOMIZE

ACCEPT ALL