




### Dimensions



### Accessories



DRIVER OPTIONS



CONNECTOR IP67

### PRODUCT

Name	DARK M HONEYCOMB 4000K N
Reference	A5140012N
Color	Black
RAL	9005
Category	OUTDOOR

### LIGHT SOURCE

Type	LED
Gross luminous flux	675 / 915 / 1290 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	4,6 / 6,7 / 10,5 W
Current	140 / 200 / 300 mA
Efficacy	147 / 137 / 123 lm/W
LED lifespan	L90B10 > 55.000h
Energy efficiency class	E

### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	53%
Light beam angle	34°

### LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded: Must be placed on remote
Dimming	No Dim - Other DIM, please consult
Electrical insulation class	II

### OTHER DATA

Sealing	IP67
Wireless control	Please Consult
Impact resistance	IK08
Recess measurements	Ø92 mm
Outdoor Use	Yes
Maximum surface temperature	68°
Supported load	7000
Weight	1075 g
Packaged weight	1185 g
Packaging dimensions	155 x 137 x 124 mm
Units per package	1
Materials	Stainless Steel (AISI 304) / Aluminium / Glass-Transparent



Dark is a floor-recessed LED luminaire used together with elements that we wish to illuminate upwards, to be able to highlight their architectonic presence (structures, walls, trees, gardens, cornices, etc.). \*\*\* NOTE: Recessed box included




DRIVER OPTIONS*	P	I	
<b>0434-00-36</b>	4,6W	140mA	1 Dark
<b>0434-00-37</b>	6,7W	200mA	1 Dark
<b>0434-00-38</b>	10,5W	300mA	1 Dark

220  
240 V~

 NO DIM | IP20

\*DIM Drivers please consult

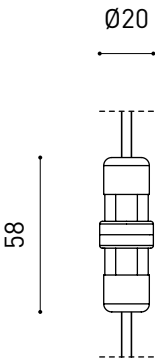

	PRODUCT
Model	Connector IP67
Reference	0434-01-66-   N
Category	Accessories
	For cable Ø4,5-6,5mm, section ≤1,5mm²



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

