




Dimensions



Accessories

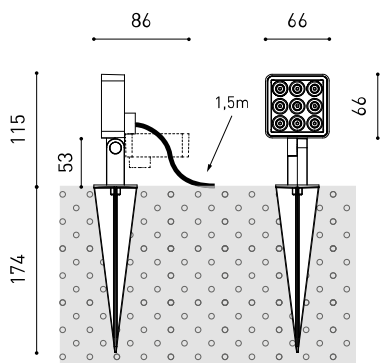

DRIVER OPTIONS



CONNECTOR IP67

PRODUCT

Name	FLASH 2700K GT
Reference	A5290000GT
Colour	Textured grey
RAL	7021
Category	OUTDOOR

LIGHT SOURCE

Type	LED
Gross luminous flux	715 / 1040 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	5,7 / 8,7 W
Efficacy	125 / 120 lm/W
LED lifespan	L90B10 >60.000h
Energy efficiency class	E

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	81%
Light beam angle	37°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI
Electrical insulation class	II


OTHER DATA


Sealing	IP65
Swivel angle	90°
Rotation angle	360°
Outdoor Use	Yes
Weight	370 g
Packaged weight	432 g
Packaging dimensions	203 x 126 x 60 mm
Units per package	1
Materials	Aluminium / Glass-Transparent / Acrylonitrile Butadiene Styrene / Polycarbonate



Dedicated to its function, Flash is an outdoor projection luminaire with a minimal, discreet body that can be precisely directed in all directions. Like a piece of architecture, this small waterproof capsule of focal light can highlight the delicacy of a flower or the presence of a sculpture, interpret volumes or simply guide a path. It can be installed with a spike or directly into the ground.



DRIVER OPTIONS		P	I	CCT	Flux
FLASH 1	0434-00-40	5,7W	700mA	2700K	715 lm
	1 to 4 Flash			3000K	730 lm
FLASH 2	0434-00-41	8,7W	1050mA	2700K	1040 lm
	1 to 4 Flash				
	 0434-01-26			3000K	1070 lm
		1 to 6 Flash			
220 240 V~	IP20	DRIVER MUST BE PLACED ON REMOTE			

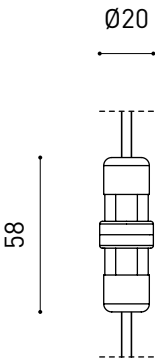

PRODUCT	
Model	Connector IP67
Reference	0434-01-66- N
Category	Accessories
For cable Ø4,5-6,5mm, section ≤1,5mm²	



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

