




Dimensions



Accessories

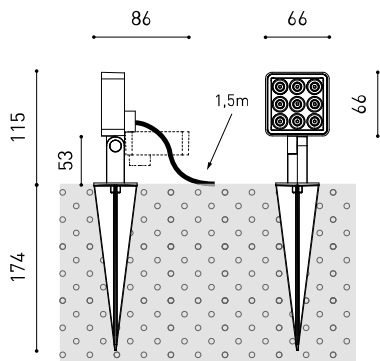

DRIVER OPTIONS



CONNECTOR IP67

PRODUCT

Name	FLASH 3000K GT
Reference	A5290001GT
Colour	Textured grey
RAL	7021
Category	OUTDOOR

LIGHT SOURCE

Type	LED
Gross luminous flux	730 / 1070 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	5,7 / 8,7 W
Efficacy	128 / 123 lm/W
LED lifespan	L90B10 >60.000h
Energy efficiency class	E

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	81%
Light beam angle	37°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI
Electrical insulation class	II


OTHER DATA


Sealing	IP65
Swivel angle	90°
Rotation angle	360°
Outdoor Use	Yes
Weight	370 g
Packaged weight	432 g
Packaging dimensions	203 x 126 x 60 mm
Units per package	1
Materials	Aluminium / Glass-Transparent / Acrylonitrile Butadiene Styrene / Polycarbonate




Dedicated to its function, Flash is an outdoor projection luminaire with a minimal, discreet body that can be precisely directed in all directions. Like a piece of architecture, this small waterproof capsule of focal light can highlight the delicacy of a flower or the presence of a sculpture, interpret volumes or simply guide a path. It can be installed with a spike or directly into the ground.



DRIVER OPTIONS		P	I	CCT	Flux
FLASH 1	<b>0434-00-40</b> 1 to 4 Flash	5,7W	700mA	2700K	715 lm
				3000K	730 lm
FLASH 2	<b>0434-00-41</b> 1 to 4 Flash	8,7W	1050mA	2700K	1040 lm
				3000K	1070 lm
	 <b>0434-01-26</b> 1 to 6 Flash				
220 240 V~	IP20	DRIVER MUST BE PLACED ON REMOTE			

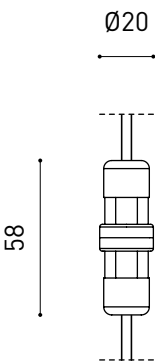

PRODUCT	
Model	Connector IP67
Reference	0434-01-66-   N
Category	Accessories
For cable Ø4,5-6,5mm, section ≤1,5mm²	



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:


### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:


### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen

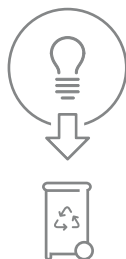

Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen

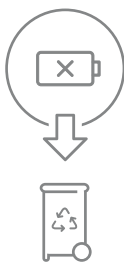

Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

