




Gala 114" Chandelier Symmetric

15741 rA

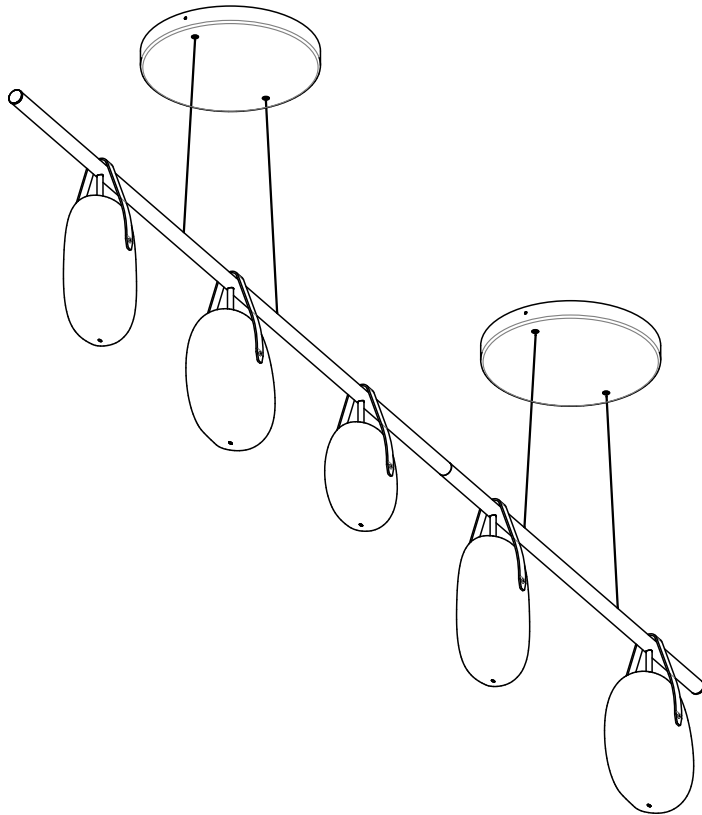

CAUTION:

Before starting, turn off power
at main circuit panel.

ADVERTENCIA:



Antes de comenzar la instalación,
apague la corriente en el tablero
principal.

ATTENTION:

Coupez l'alimentation avant de
procéder à l'installation.



Calling for backup? Scan above
to contact our team.

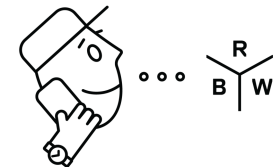


www.RBW.com


+1 212 388 0399

support@RBW.com


© RBW Studio LLC, 2013, 2020

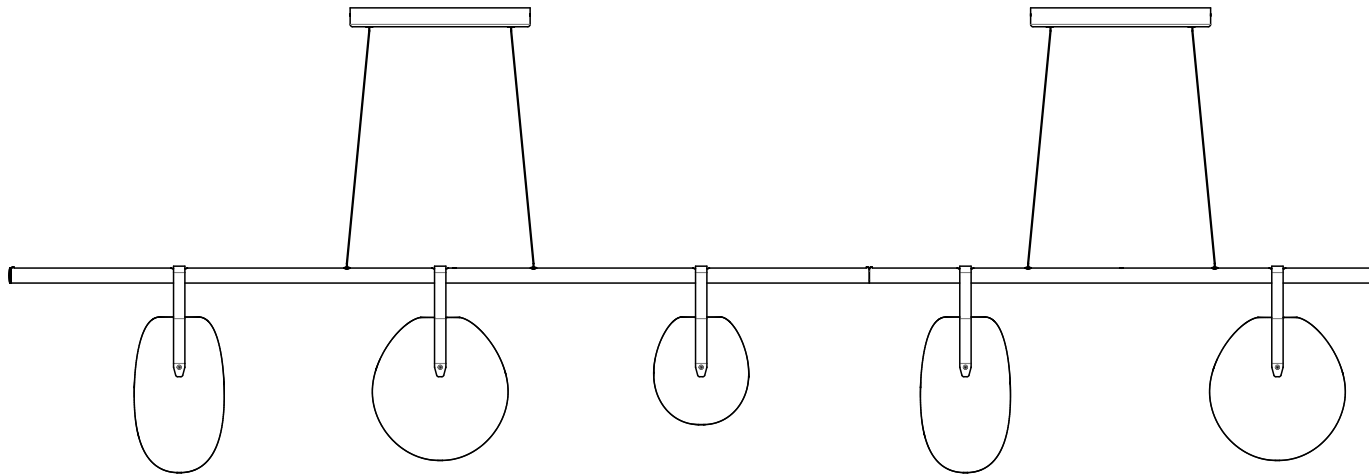

GC-11410

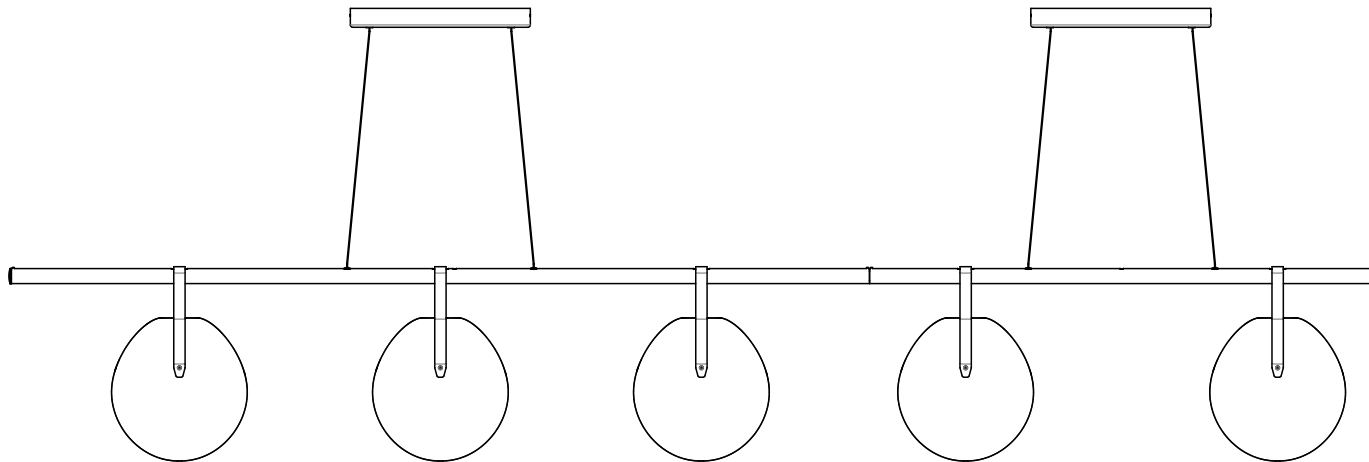


GC-11430

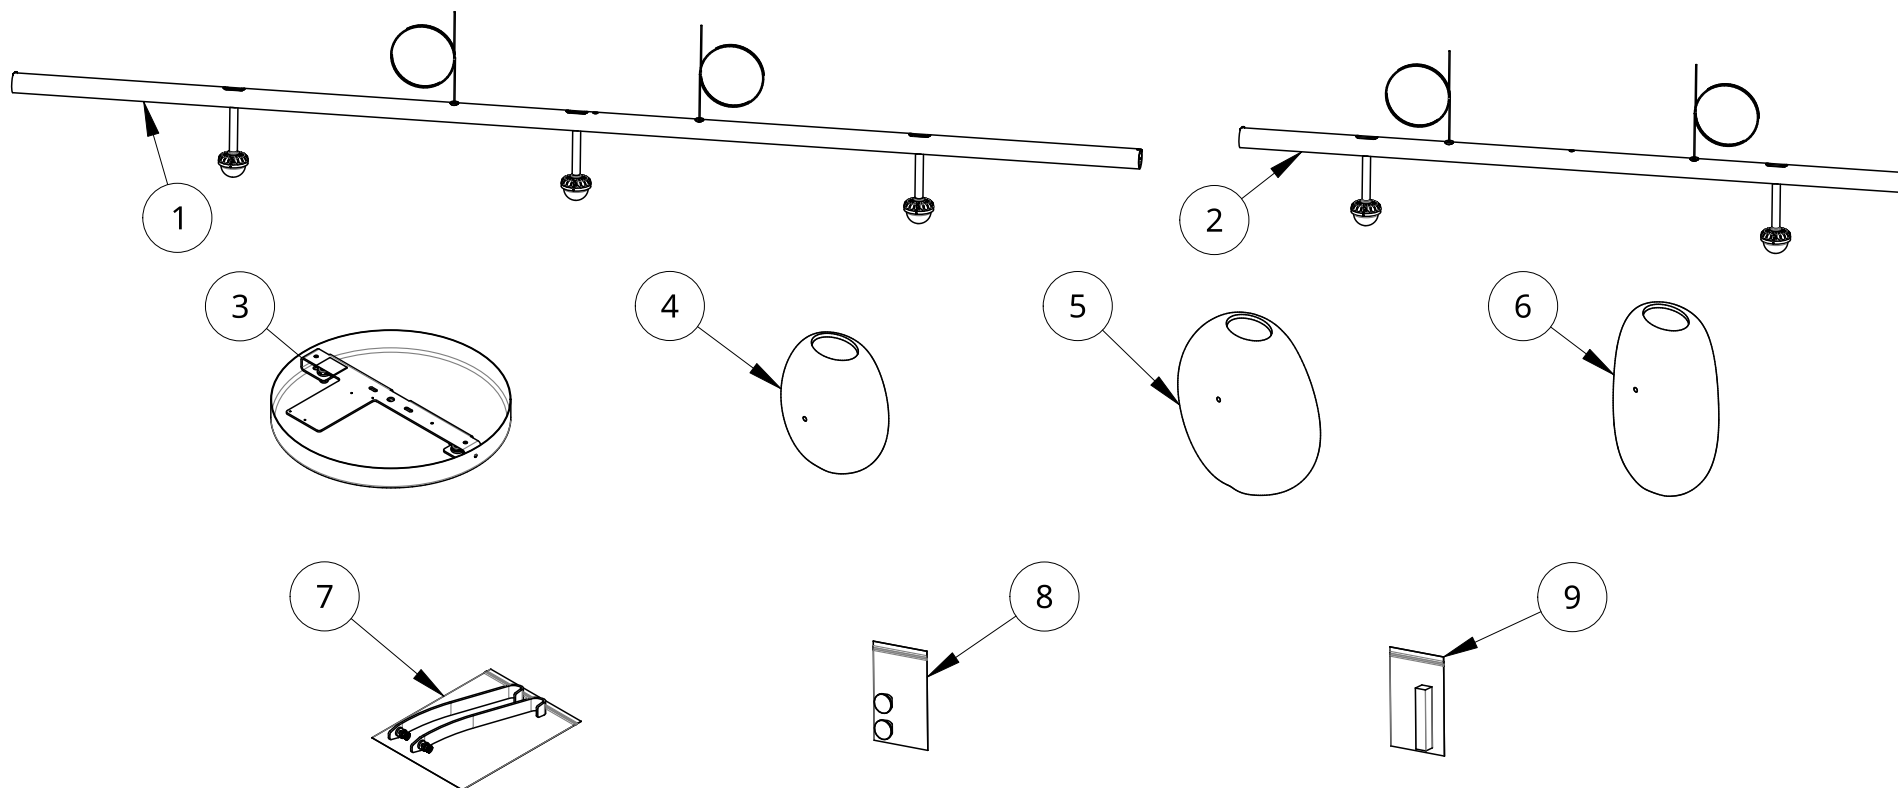



What's Included: G11410. Part Configurations May Vary

Item	Qty	Part number	Description
1	1	10485-PC30-22	Assembly: Gala Boom. 72 Symmetric Packaging. 2200K CCT. Matte Black
2	1	10481-PC30-22	Assembly: Gala Boom. 42 Packaging. 2200K CCT. Matte Black
3	2	11888-PC30	Package: Gala Chandelier Canopy. Matte Black
4	1	11067	Gala Chandelier Small Globe
5	2	11066	Gala Chandelier Large Globe
6	2	11068	Gala Chandelier Long Globe
7	5	15725-PC30	Assembly: Gala Chandelier Strap Kit. Matte Black
8	1	15727-PC30	Gala End Cap Hardware Kit. Matte Black
9	1	15761	Gala Connector Hardware Kit

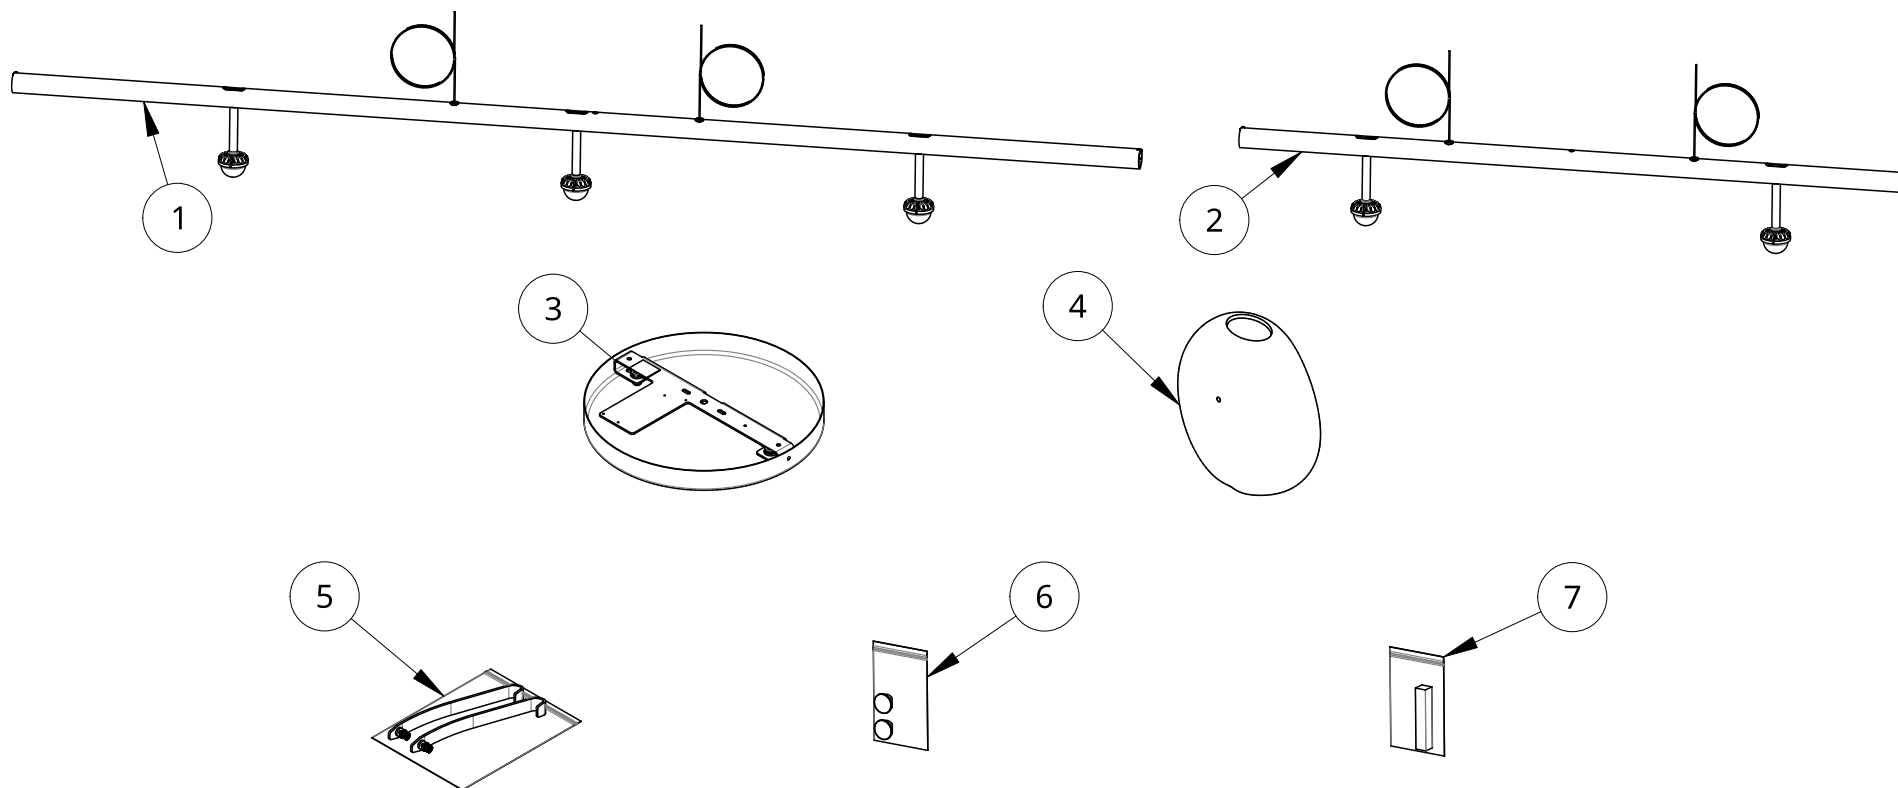


What's Included: G11430. Part Configurations May Vary

Item	Qty	Part number	Description
1	1	10485-PC30-22	Assembly: Gala Boom. 72 Symmetric Packaging. 2200K CCT. Matte Black
2	1	10481-PC30-22	Assembly: Gala Boom. 42 Packaging. 2200K CCT. Matte Black
3	2	11888-PC30	Package: Gala Chandelier Canopy. Matte Black
4	5	11066	Gala Chandelier Large Globe
5	5	15725-PC30	Assembly: Gala Chandelier Strap Kit. Matte Black
6	1	15727-PC30	Gala End Cap Hardware Kit. Matte Black
7	1	15761	Gala Connector Hardware Kit

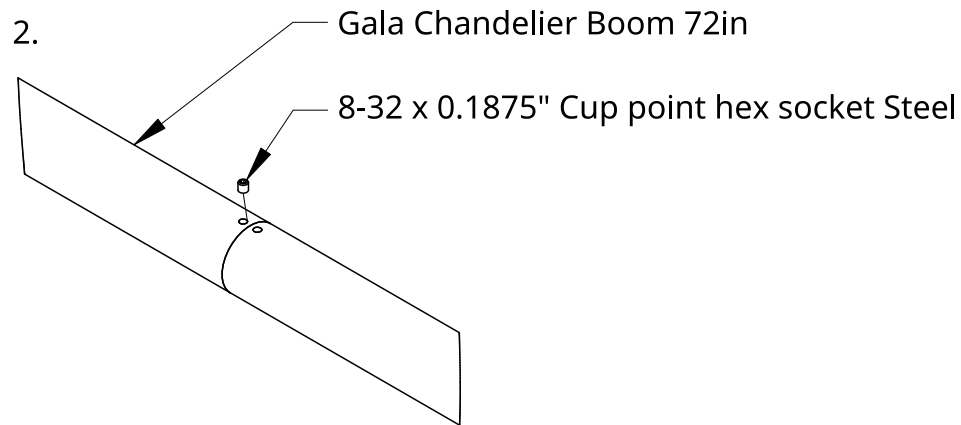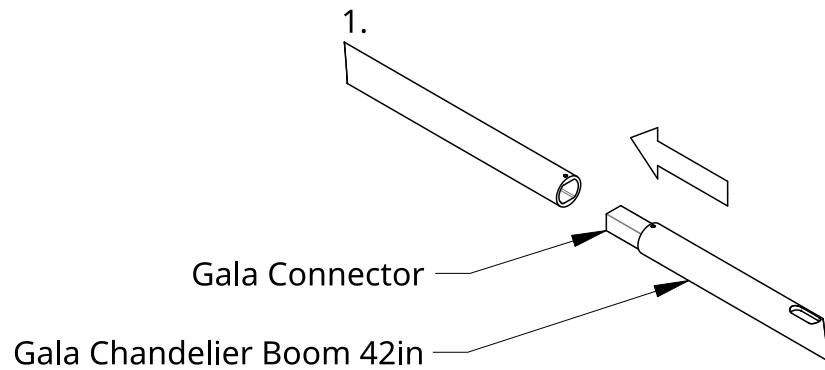


Installation - Boom Connection

1. Slide Gala Connector into Gala Booms 42in and 72in.
2. Fasten via included 8-32 x 0.1875" Set Screws into Booms

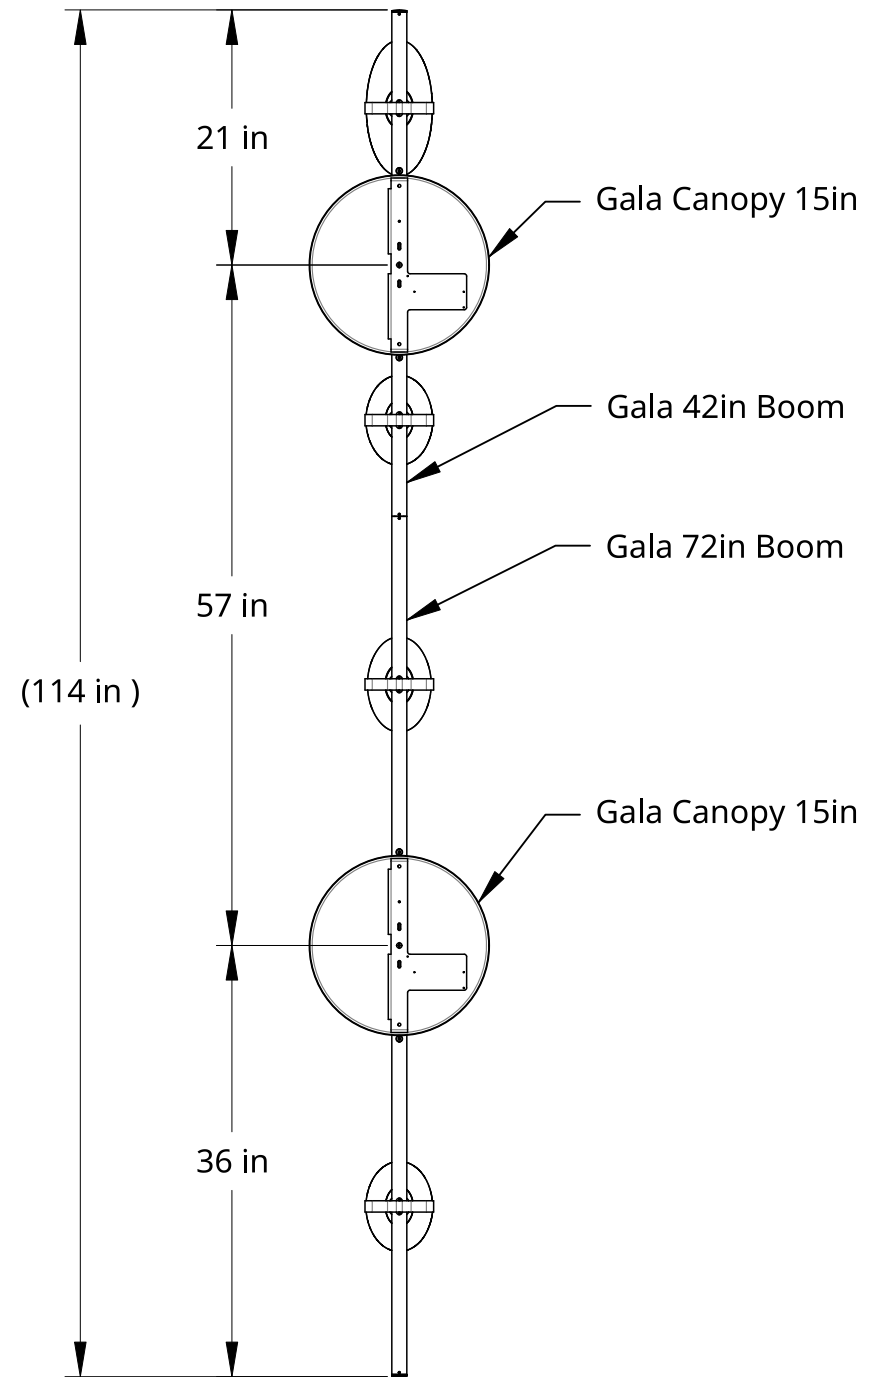

Top View: Canopy Spacing

Ceiling Surface	Recommended Fastener
Stud-Backed Drywall	#10 Drywall Screw
Hollow Drywall	Molly or Toggle Bolt
Concrete Slab	10-24 Expanding Anchor
Wood	#10 Wood Screw

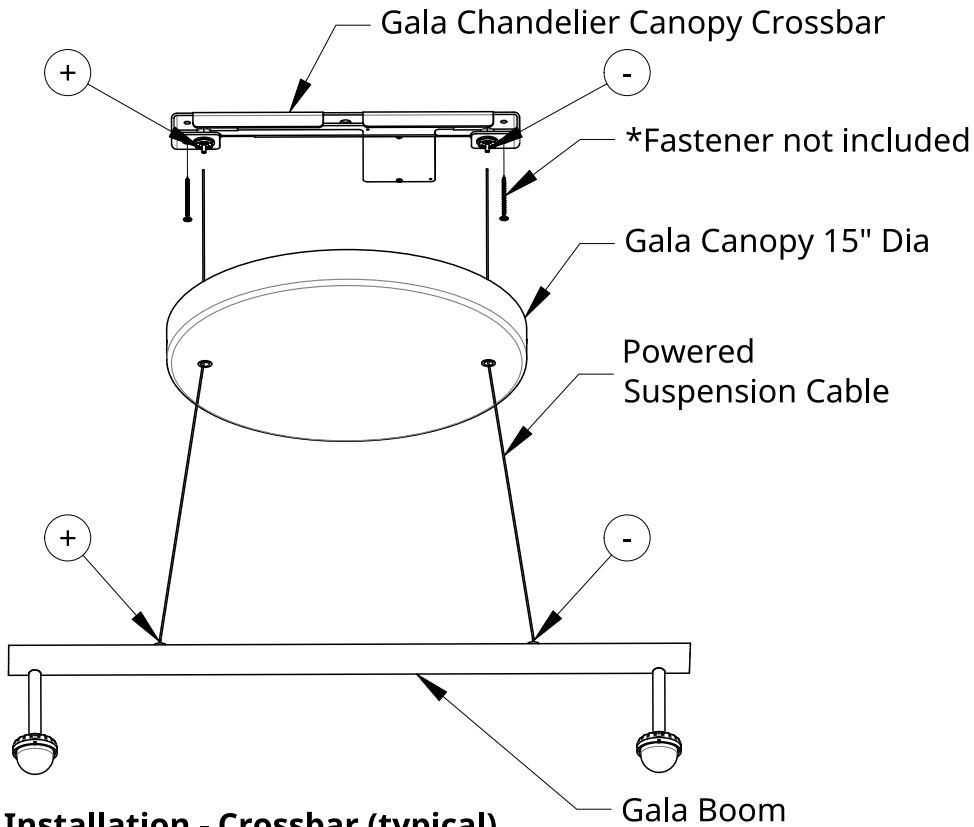


Installation - Crossbar (typical)

1. Mount Crossbar over junction box in desired orientation using recommended fastener.
Note: +/- Polarity.
2. Feed Powered Suspension Cables through Canopy.
Note: +/- Polarity.
3. Feed Cables into corresponding Cable Grippers.

See Canopy Install Instructions 15743 for more information

Page Intentionally Left Blank



Note: While installing globes, fixture will be off balance and will require a second person to balance the mast until all globes are in place.

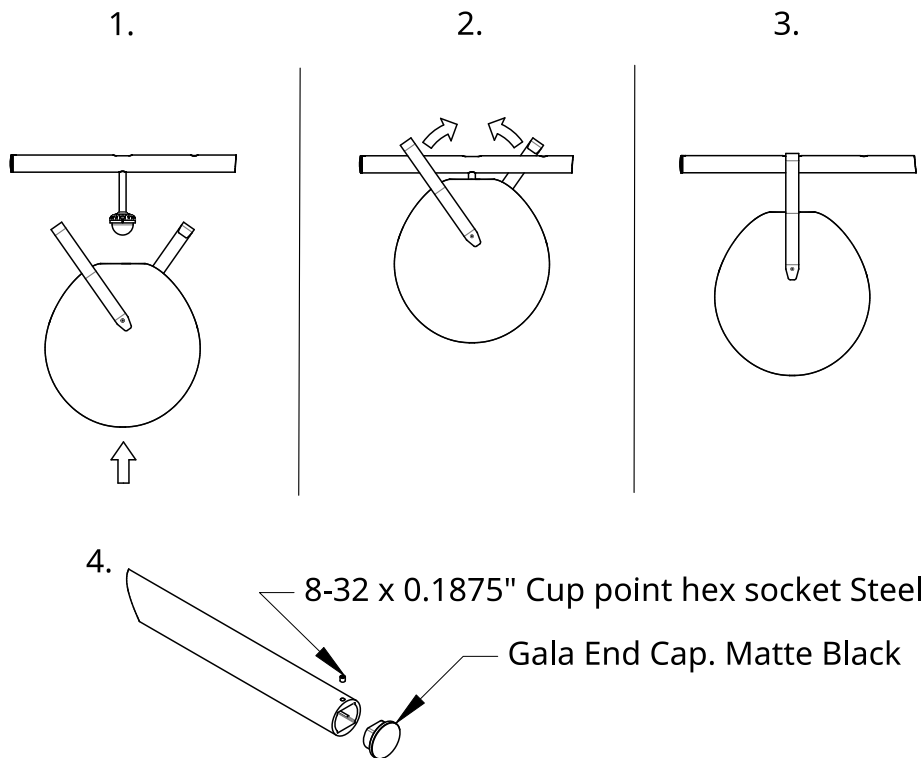


Installation - Globes and End Caps

1. With Straps attached to Globe and rotated at 45° from vertical, lift Globe upward at light source so Straps extend above Boom.
2. Rotate Straps to their vertical position.
3. Lower Globe until the Straps fit into slot on top of Boom.
4. Fasten Gala End Cap into each open end of fixture via included 8-32 x 0.1875" Set Screws.
5. Congratulations! End of guide.

Gala 114": Install Sequence

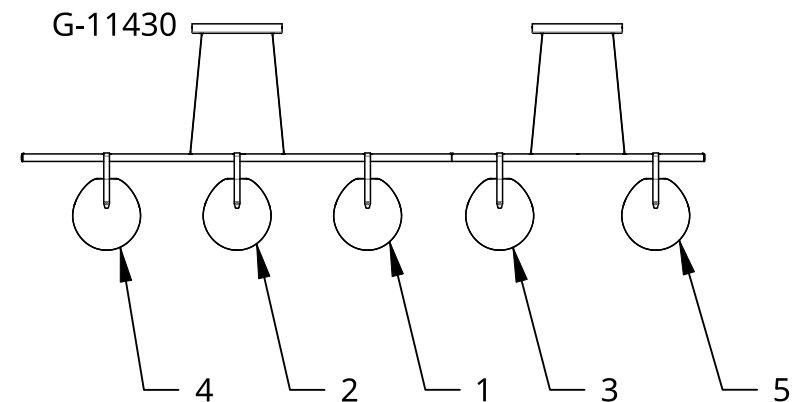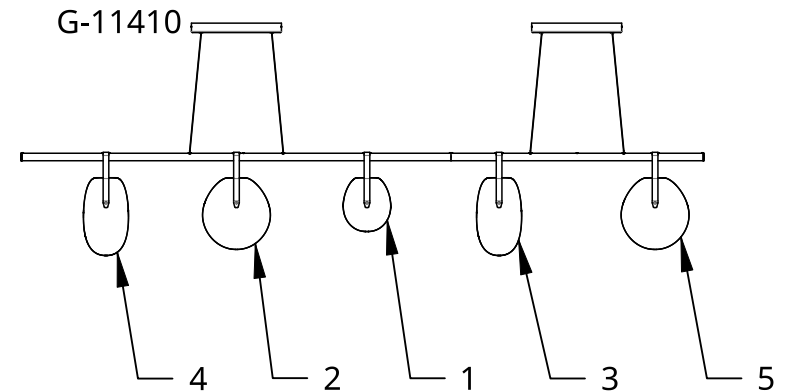


Note: Apply above globe installation steps for all configurations of Gala Chandelier to avoid uneven weight distribution and possible damage.



Gala 114" Chandelier Asymmetric

15742 rA

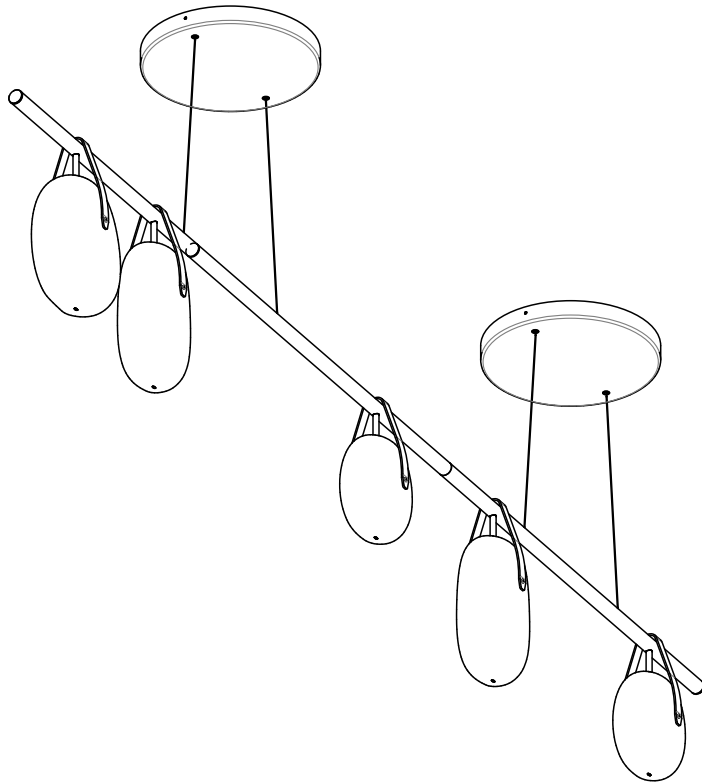

CAUTION:

Before starting, turn off power
at main circuit panel.

ADVERTENCIA:



Antes de comenzar la instalación,
apague la corriente en el tablero
principal.

ATTENTION:

Coupez l'alimentation avant de
procéder à l'installation.



Calling for backup? Scan above
to contact our team.




www.RBW.com

+1 212 388 0399


support@RBW.com

© RBW Studio LLC, 2013, 2020

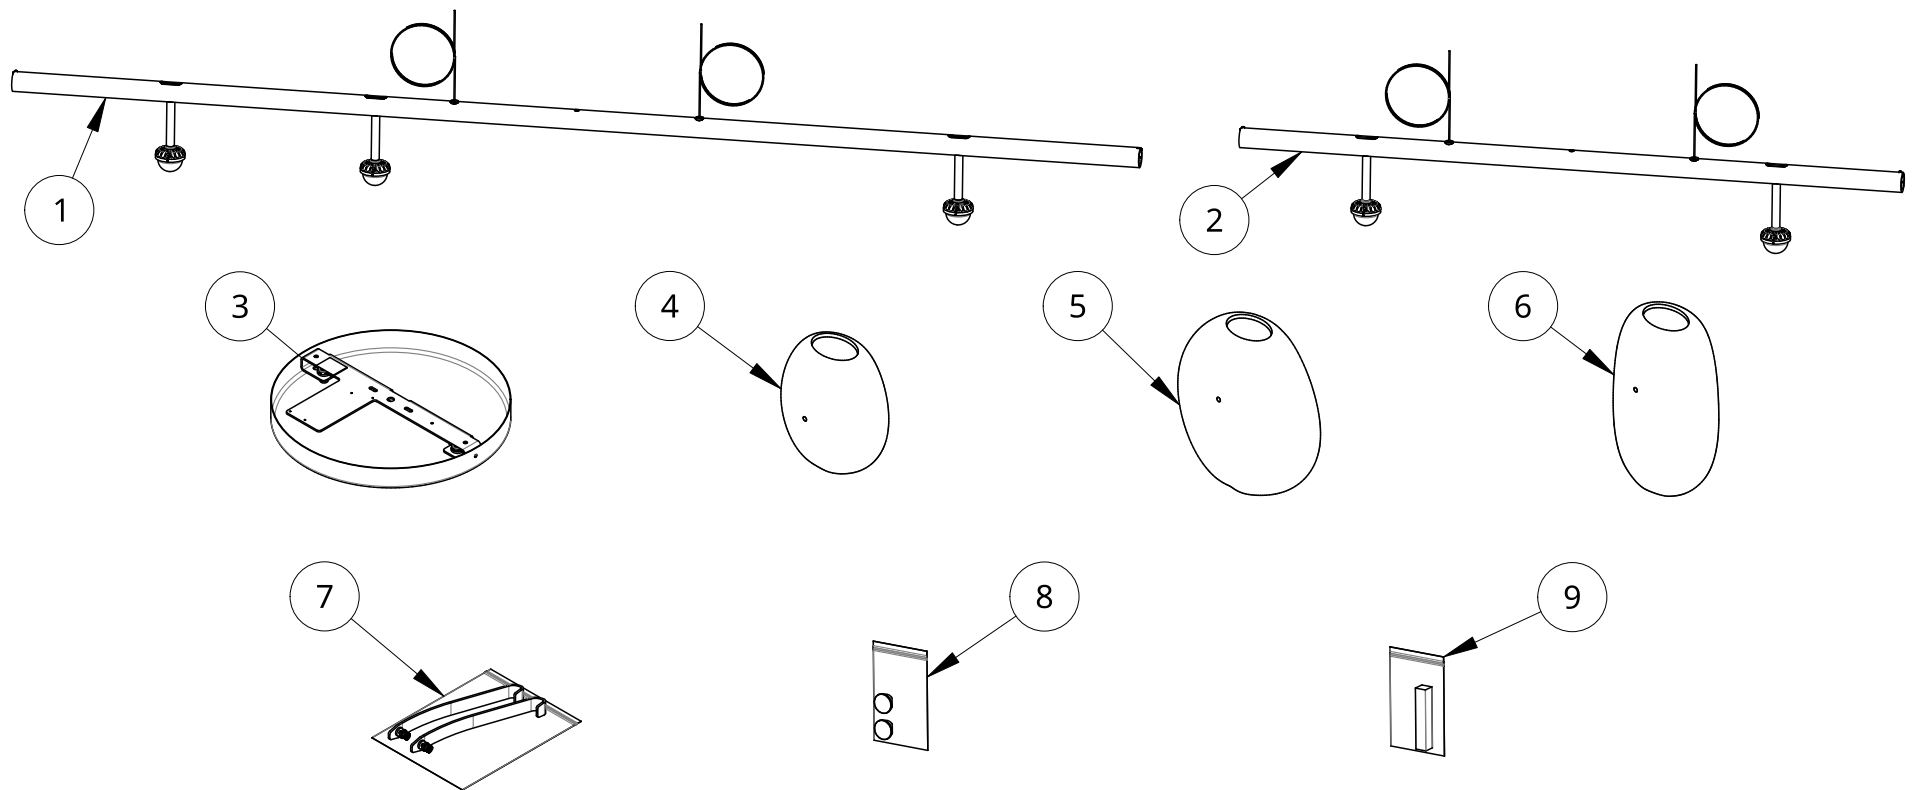


What's Included: Part Configurations May Vary

Item	Qty	Part number	Description
1	1	10477-PC30-22	Assembly: Gala Boom. 72 Asymmetric Packaging. 2200K CCT. Matte Black
2	1	10481-PC30-22	Assembly: Gala Boom. 42 Packaging. 2200K CCT. Matte Black
3	2	11888-PC30	Package: Gala Chandelier Canopy. Matte Black
4	2	11067	Gala Chandelier Small Globe
5	1	11066	Gala Chandelier Large Globe
6	2	11068	Gala Chandelier Long Globe
7	5	15725-PC30	Assembly: Gala Chandelier Strap Kit. Matte Black
8	1	15727-PC30	Gala End Cap Hardware Kit. Matte Black
9	1	15761	Gala Connector Hardware Kit

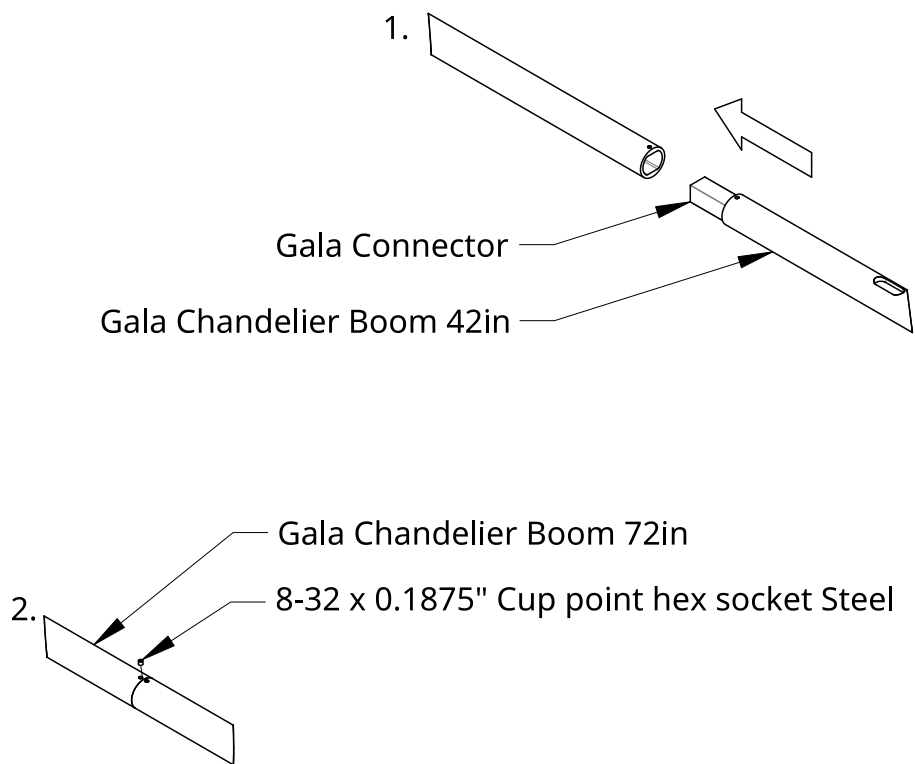


Installation - Boom Connection

1. Slide Gala Connector into Gala Booms 42in and 72in.
2. Fasten via included 8-32 x 0.1875" Set Screws into Booms

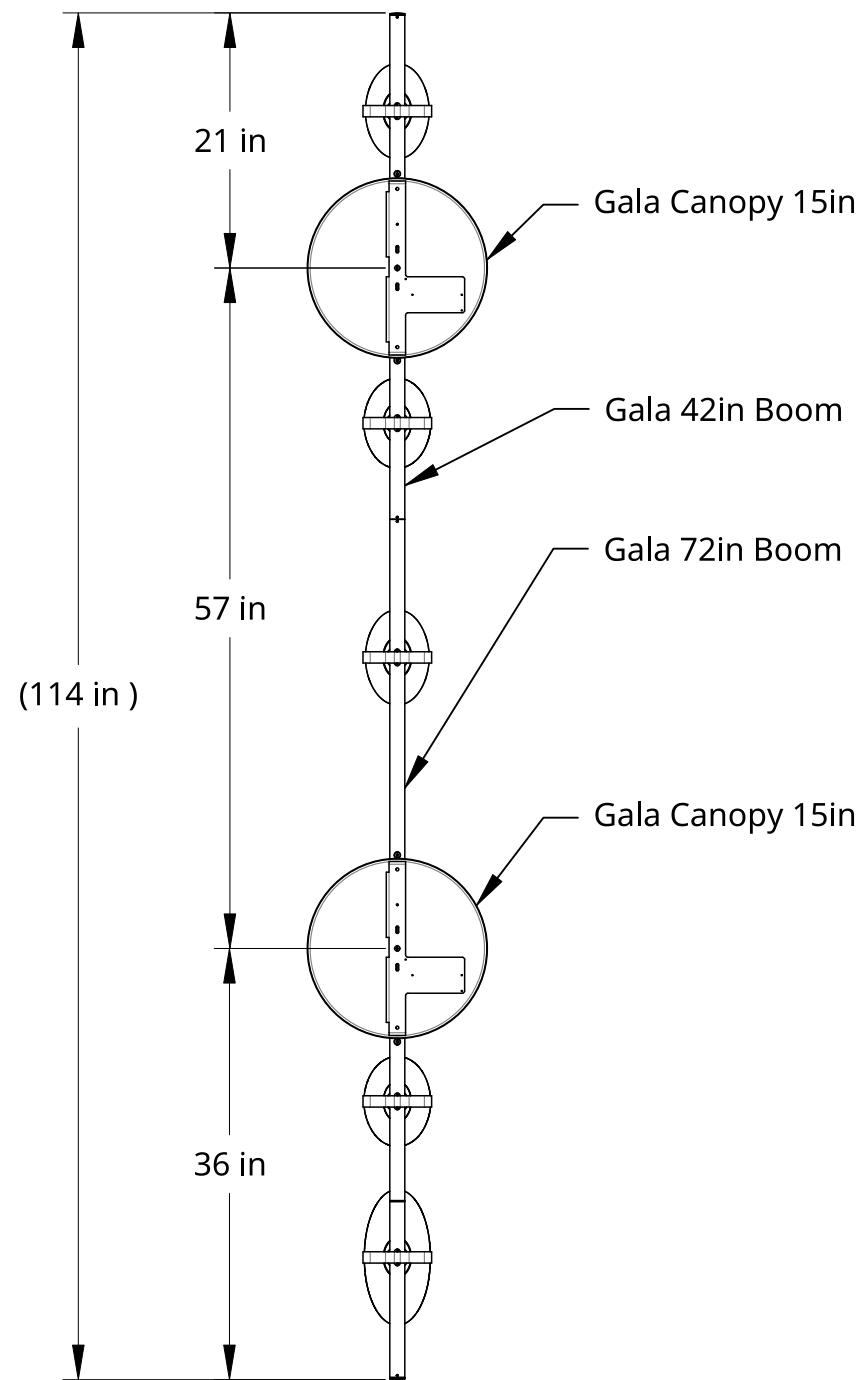

Top View: Canopy Spacing

Ceiling Surface	Recommended Fastener
Stud-Backed Drywall	#10 Drywall Screw
Hollow Drywall	Molly or Toggle Bolt
Concrete Slab	10-24 Expanding Anchor
Wood	#10 Wood Screw

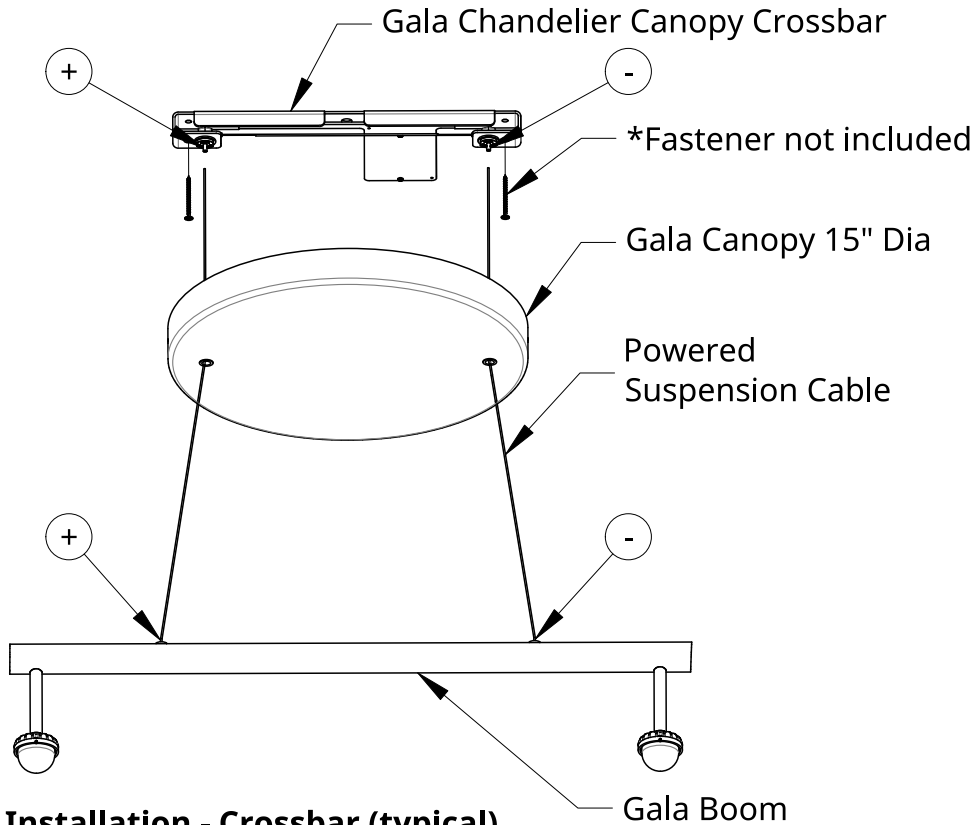


Installation - Crossbar (typical)

1. Mount Crossbar over junction box in desired orientation using recommended fastener.
Note: +/- Polarity.
2. Feed Powered Suspension Cables through Canopy.
Note: +/- Polarity.
3. Feed Cables into corresponding Cable Grippers.

See Canopy Install Instructions 15743 for more information

Page Intentionally Left Blank


Note: While installing globes, fixture will be off balance and will require a second person to balance the mast until all globes are in place.

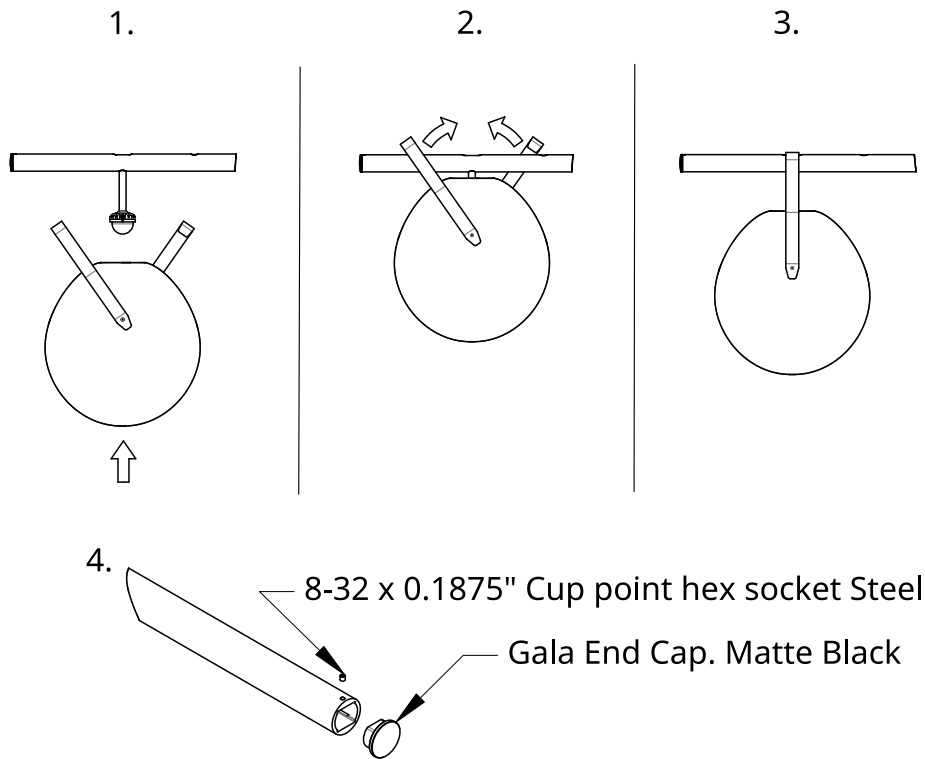

Installation - Globes and End Caps

1. With Straps attached to Globe and rotated at 45° from vertical, lift Globe upward at light source so Straps extend above Boom.
2. Rotate Straps to their vertical position.
3. Lower Globe until the Straps fit into slot on top of Boom.
4. Fasten Gala End Cap into each open end of fixture via included 8-32 x 0.1875" Set Screws.
5. Congratulations! End of guide.

Gala 114": Install Sequence

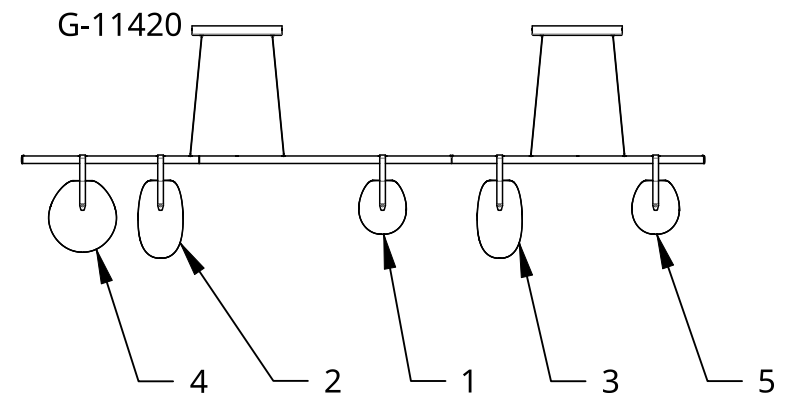


Note: Apply above globe installation steps for all configurations of Gala Chandelier to avoid uneven weight distribution and possible damage.



Gala Chandelier Canopy

15743 rB

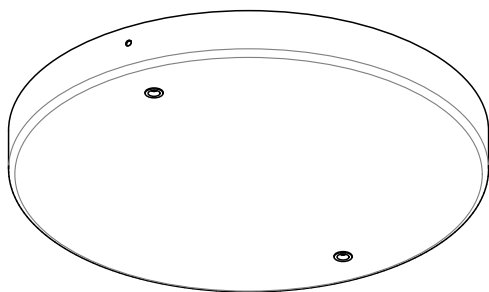

CAUTION:

Before starting, turn off power
at main circuit panel.

ADVERTENCIA:


Antes de comenzar la instalación,
apague la corriente en el tablero
principal.

ATTENTION:

Coupez l'alimentation avant de
procéder à l'installation.




Calling for backup? Scan above
to contact our team.



www.RBW.com
+1 212 388 0399
support@RBW.com
© 2023, RBW Studio LLC


What's Included: Part Configurations May Vary

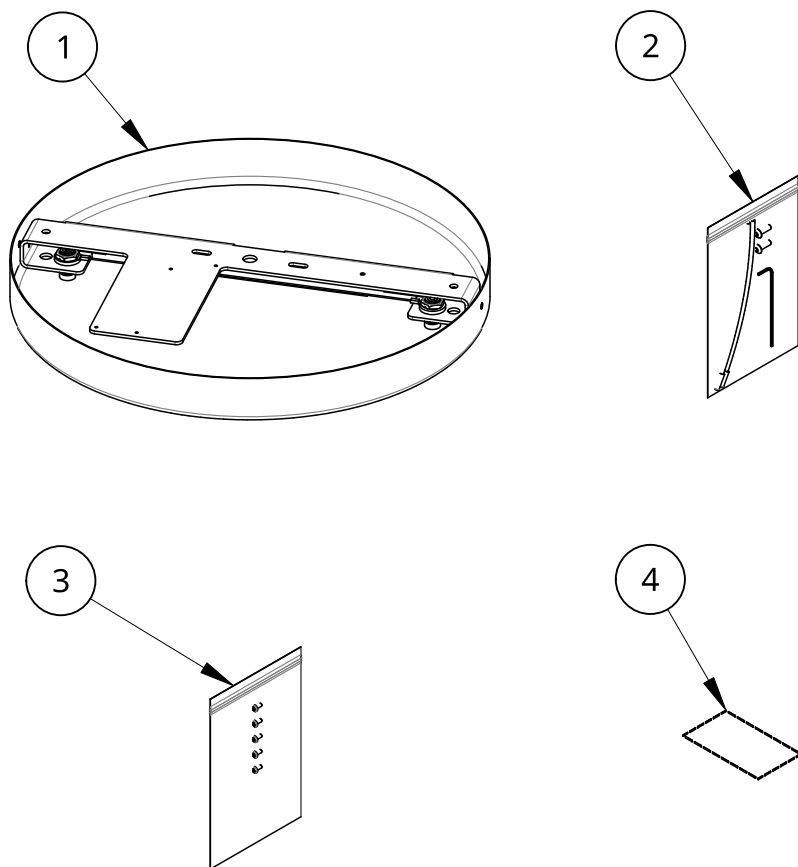

Item	Qty	Description
1	1	Gala Canopy Assembly Black
2	1	Gala Canopy Mounting Kit
3	1	Gala Driver Mounting Screw Kit
4	1	LED Driver

Canopy for 72" Boom must use 600mA Driver


Canopy for 42" Boom must use 400mA Driver

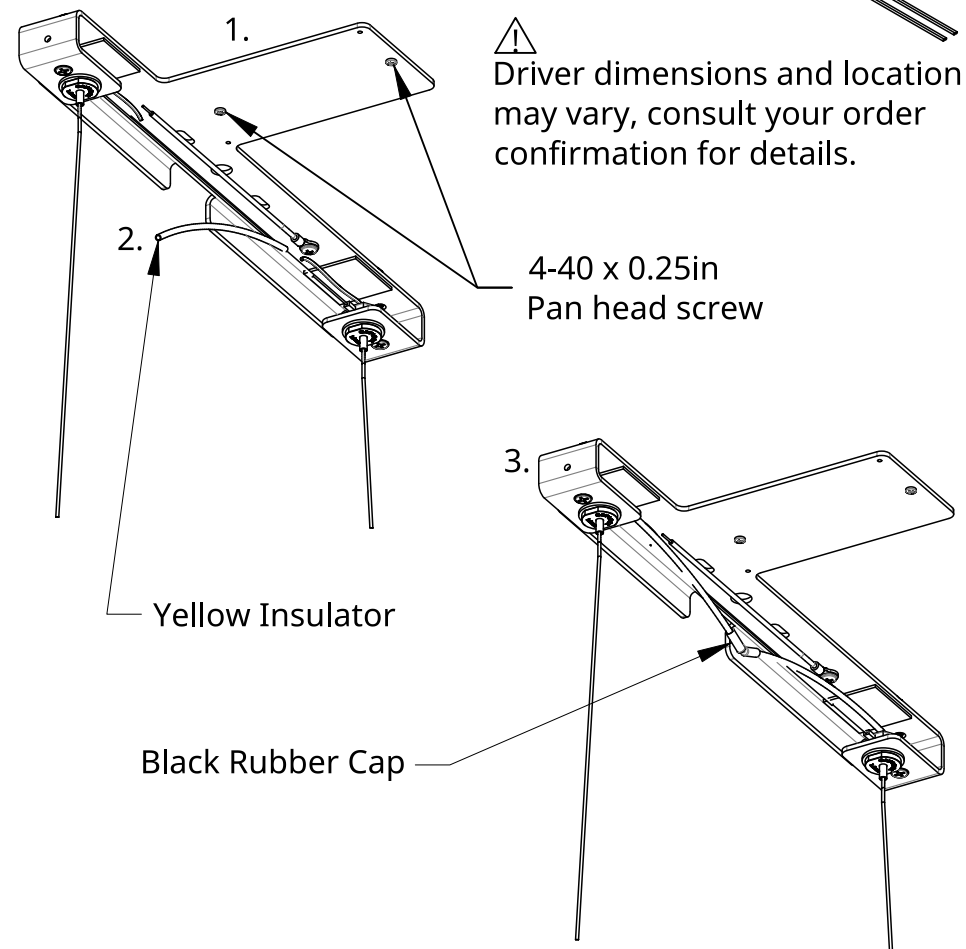

Installation - Driver and Powered Cables

1. Fasten driver to Crossbar via included 4-40 x 0.25in pan head screws.
2. Adjust fixture to final hang height. Trim excess Cables, slide Yellow Insulators over Cables.
3. Cap Yellow Insulators with Black Rubber Caps.

See chandelier installation instructions for mounting crossbar to substrate.

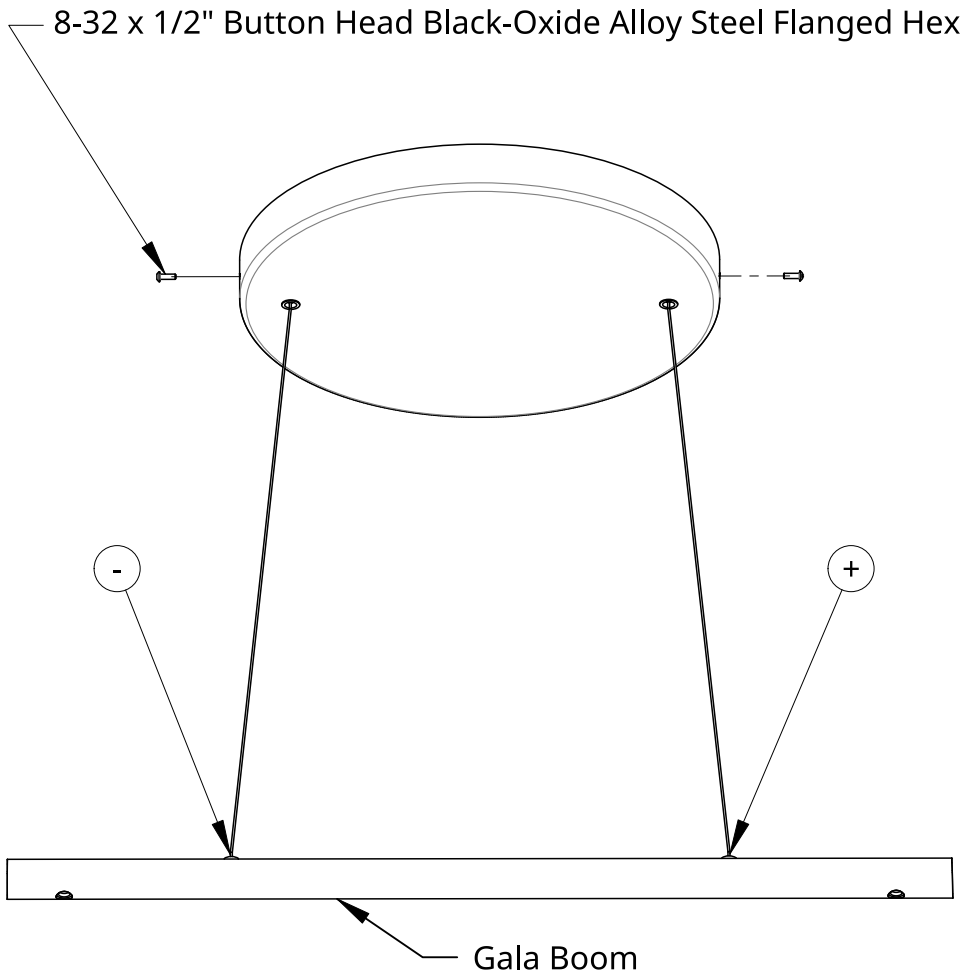

Page Intentionally Left Blank

Installation - Wiring and Canopy Screws

1. Connect Red (+) and Black (-) leads from driver to red and black leads connected to cable grippers.
2. Connect AC (L) and AC (N) leads from driver to leads in j-box.
3. Connect ground wire from canopy to ground in j-box
4. Slide Canopy upward and cover Crossbar. Secure in place with (2) 8-32 hex screws on either side of Canopy with provided allen key.
5. Congratulations! End of guide.