





Dimensions

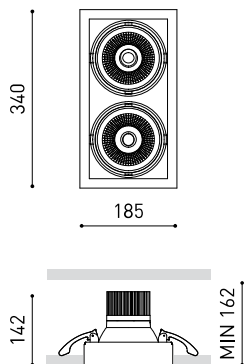

Accessories

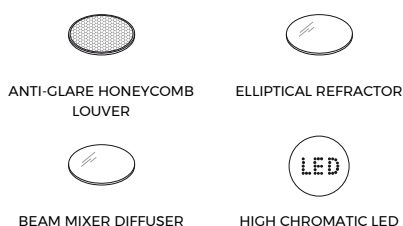

| | |
|-----------|-------------------------------------|
| Name | HUBBLE DOUBLE 1 MEDIUM 28° 4000K NT |
| Reference | A2771122NT |
| Colour | Textured black |
| RAL | 9005 |
| Category | CEILING RECESSED |

PRODUCT

HUBBLE DOUBLE 1 MEDIUM 28° 4000K NT

A2771122NT

Textured black

9005

CEILING RECESSED

LIGHT SOURCE

LED

2 X 2475 lm

4000 K - Other K, please consult

MacAdam Step 2

CRI>90

2 X 16,5 W

500 mA

150 lm/W

L90B10 >55.000h

E

LIGHTING FIXTURE | PHOTOMETRIC DATA

90%

28°

LIGHTING FIXTURE | ELECTRICAL DATA

Included - Connected

38,16 W

50/60 Hz

No Dim

☐

OTHER DATA

IP20

Please Consult

Please Consult

170 x 325 mm

X20° Y20°

3250 g

3622 g

440 x 225 x 168 mm


1

Aluminium / Glass-Trans





Hubble is a recess-mounted LED with cardan joint type pivot, offering extremely outstanding lumen packages for spaces that require a large amount of light and spotlight type lighting. The capacity of Hubble to be directed without standing out from the ceiling, and its small size related to its lumens, help prevent the luminaire from generating an invasive presence in the area. Indicated for lighting from high ceilings and for retail, it has options to adjust the intensity of its high lumen flux.

Polar diagram

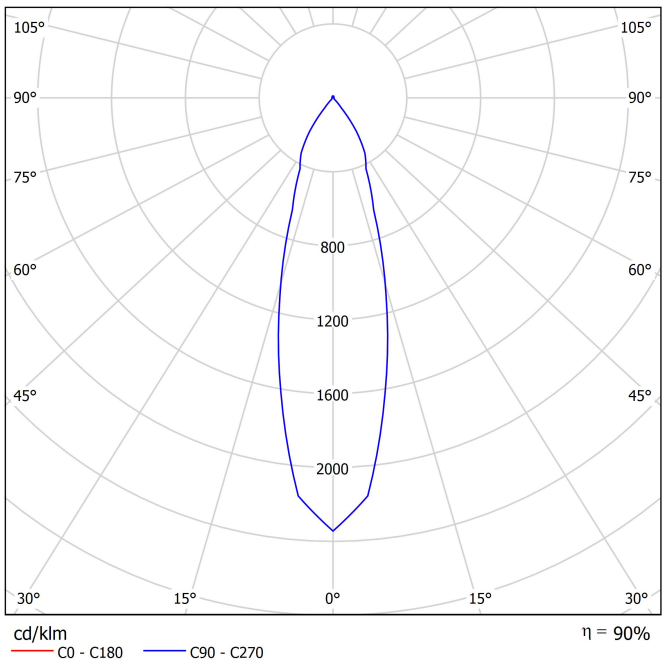

Conical diagram

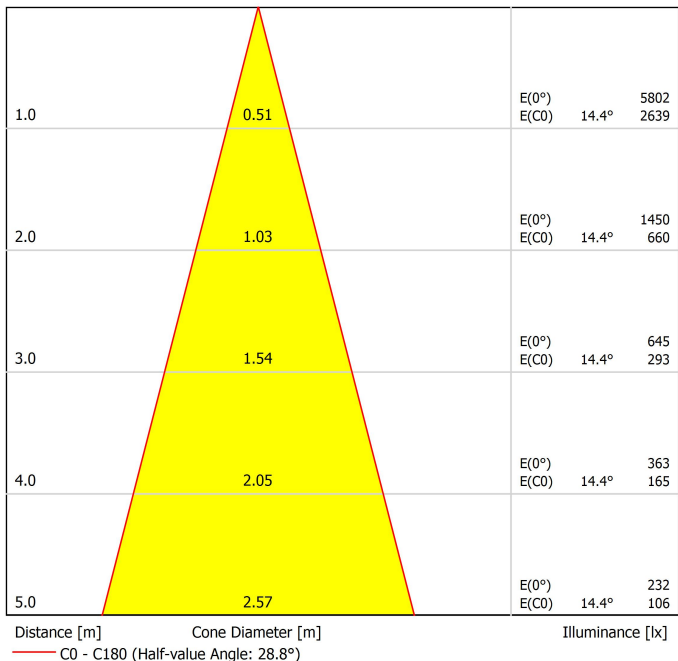



| PRODUCT | |
|----------------------|-----------------------------|
| Model | Anti-glare Honeycomb Louver |
| Reference | 08020200 |
| Category | Accessories |
| NOT SOLD SEPARATELY. | |



Anti-glare Honeycomb Louver

Accessory featuring a honeycomb structure designed to control the light beam, reduce glare, and prevent direct exposure to the light source.



| PRODUCT | |
|-----------|----------------------|
| Model | Elliptical Refractor |
| Reference | 08020400 |
| Category | Accessories |

NOT SOLD SEPARATELY.

Elliptical Refractor

Lens that modifies the shape of the light beam through refraction, generating an elliptical distribution. Ideal for illuminating elongated surfaces such as corridors, shelves, or walls.



| PRODUCT | |
|-----------|---------------------|
| Model | Beam Mixer Diffuser |
| Reference | 08050300 |
| Category | Accessories |

NOT SOLD SEPARATELY.

Beam Mixer Diffuser

The beam mixer diffuser reduces irregularities and distortions caused by parabolic, Fresnel lenses, or TIR collimators, ensuring a more uniform light distribution without significantly increasing beam length.

| Vivid Model Colour Temperature | 2700K | 3000K | 3500K | 4000K | Light Pink |
|---|-------|-------|-------|-------|------------|
|  Reading | | | ● | ● | |
|  Fruits & Vegetables | | ● | ● | | |
|  Bakery | ● | | | | |
|  Retail | | ● | ● | | |
|  Cosmetics | | | ● | ● | |
|  Meat | | | | | ● |
|  Fish | | | | ● | |
|  Seafood | | | | ● | ● |

High Chromatic LED


For commercial product showcasing.

Arkoslight offers, in some of its products, the possibility to incorporate a special LED designed to enhance the visual presentation of goods and products for commercial purposes.

This high-chromaticity LED is selected to highlight tones that encourage a positive psychological perception of the illuminated object.

The light source provides a more attractive and intense colour palette than a conventional LED. This is achieved through a specific LED configuration under a "special saturation parameter," allowing colours and textures to appear more vivid within the visible spectrum.

The diode and its phosphor coating are carefully selected for each application.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:


Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:


Anweisungen zur entsorgung der Leuchtenkomponenten:




Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen

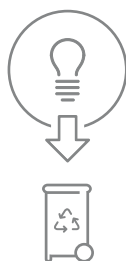

Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

