


io giro VOLT datasheet

LED ceiling spotlight with spherical head and lens optics. Version for mounting on plaster surfaces; connection to 230 V AC / 50 Hz mains voltage; dimmable via trailing-edge phase-cut dimmer*.

Thanks to the almost invisible division of the two halves of the sphere, the io giro is freely rotatable (with stop) and pivotable by up to 45° on the vertical axis. Lighting effect through optional inserts can be changed at any time using a simple mechanism; the VOLT light engine is replaceable.



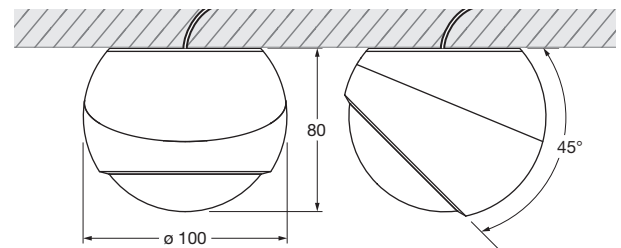


















dimensions in mm

technical data io giro VOLT



properties	material	aluminium chrome-plated, painted or anodised, plastic, glass, optical plastic
	turning range	360° (with stop)
	movability	45° (with stop)
	weight	0.70 kg
surface	head	matt gold, rose gold, bronze, shiny chrome, dark chrome, glossy white and matt white (bicolor), matt white, matt black, phantom, black phantom
VOLT light engine	average life time	> 40.000 hrs
	energy efficiency class (luminous efficiency)	G (59 lm / W)
	power	LED 13 W
	color rendering index	perfect color; CRI Ra 97
	color temperature (color consistency)	2700 K, 3000 K (2-step)
electricity	dimming	trailing-edge phase cut dimmer*
	connection	operation at 230 V AC / 50 Hz
	power factor power supply (cos ϕ 1)	0.9
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

* For a list of compatible dimmers, see www.occhio.com/dim_en

io giro VOLT
overview inserts

io head				
satinised glass				
soft edge glass				
fresnel lens				
color filter (optional, power of light source max. 13 W)				
lens				
				
	io C	io C with soft edge glass	io C with satinised glass	io C with fresnel lens

io giro VOLT lighting effects

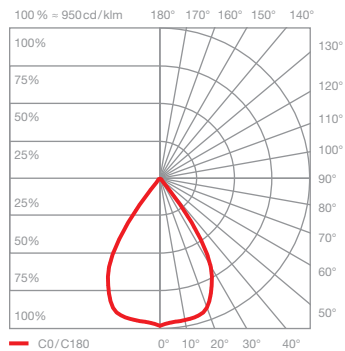
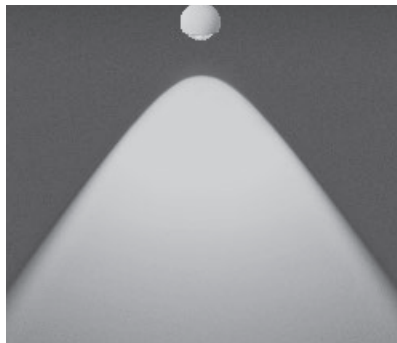


io C
directed light with contour beam angle
(approx. 80°)*

inserts: lens

luminous flux: perfect color 13 W 650 lm



*without aperture

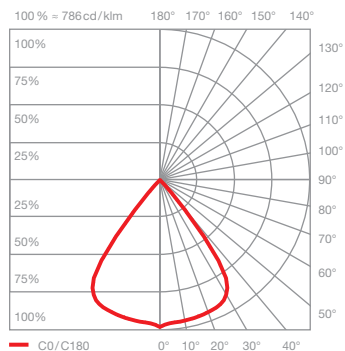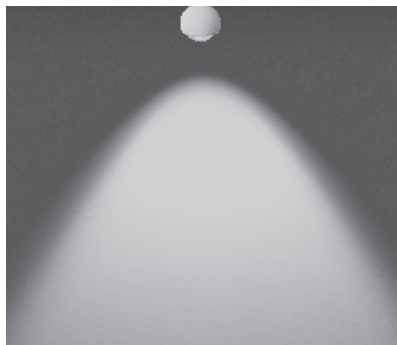

io C with soft edge glass
directed light with soft contour beam angle
(approx. 80°)

inserts: lens
soft edge glass



luminous flux: perfect color 13 W 580 lm

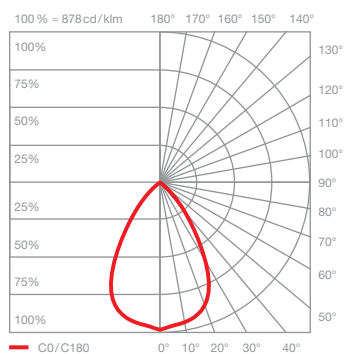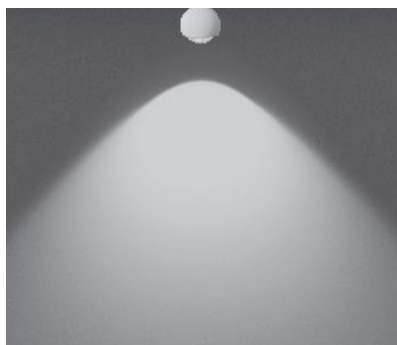

io C with satinised glass
directed light with soft contour beam angle
(approx. 100°)

inserts: lens
satinised glass

luminous flux: perfect color 13 W 510 lm

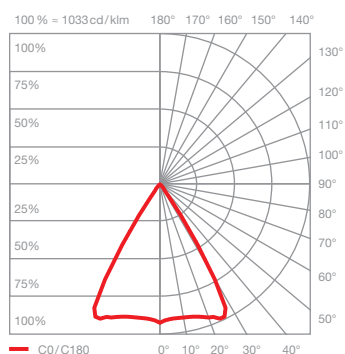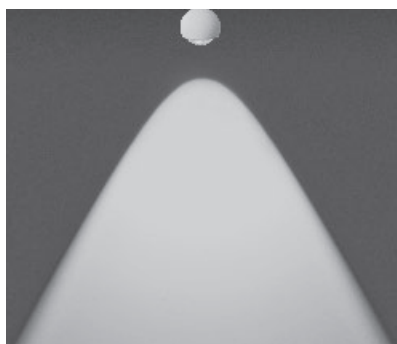

io C with fresnel lens
bundled light beam angle approx. 60°

inserts: lens
fresnel lens

luminous flux: perfect color 13 W 560 lm