


# IRIS 60 — CW

# A—N—D

CEILING/WALL

Designed by Caine Heintzman

2024

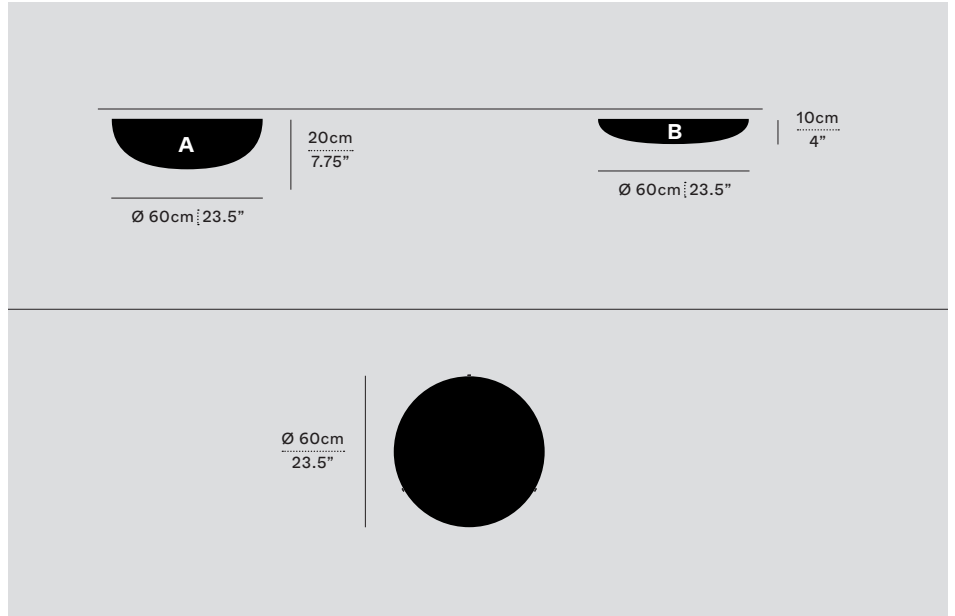

IRI-60-CW-A-BLK-27-ELV-120

A-N-D.COM

## TYPE

Ceiling/Wall

## DIMENSIONS

A: Ø 60cm x 20cm / Ø 23.5" x 7.75"

B: Ø 60cm x 10cm / Ø 23.5" x 4"

## 3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

## CERTIFICATIONS



Application: dry indoor location only

## MATERIALS

Aluminum, Acrylic

## TECHNICAL INFORMATION

### Input Voltage

110–120V, 220–240V, 110–277V

### Lamping

Static CCT: 7W 35V DC LED


DW CCT: 10W 35V DC LED

CRI 90+, 50,000 hours

### Controls

Phase dimming, 0–10V, DALI

## COLOUR TEMPERATURE OPTIONS



## DIM TO WARM

Warm / DIM - Bright / DIM +



## MANUFACTURED

Canada

## FINISHES



Black (BLK) Silver (SLV)

## LENS FINISH



Clear (CLR)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	SHADE	FINISH	CCT	PS	VOLTAGE IN
IRI	60	CW	<input type="checkbox"/> A	<input type="checkbox"/> BLK (BLACK)	<input type="checkbox"/> 27 (2700K)	<input type="checkbox"/> ELV	<input type="checkbox"/> 120
			<input type="checkbox"/> B	<input type="checkbox"/> SLV (SILVER)	<input type="checkbox"/> 30 (3000K)	<input type="checkbox"/> O10	<input type="checkbox"/> 230
					<input type="checkbox"/> 35 (3500K)	<input type="checkbox"/> DAL	<input type="checkbox"/> 277*
					<input type="checkbox"/> DW (DIM TO WARM)		

\*277 only available with O10