


# IRIS 90 — CW

# A—N—D

CEILING/WALL

Designed by Caine Heintzman

2023

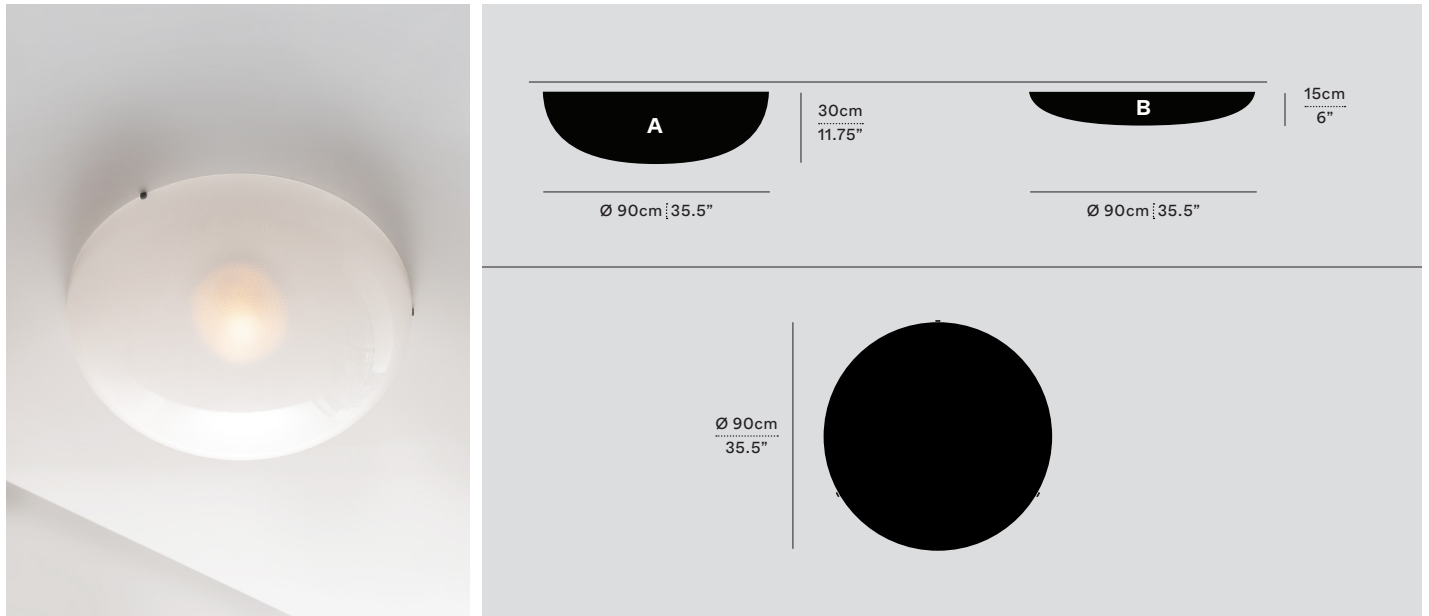

IRI-90-CW-A-BLK-27-ELV-120

A-N-D.COM

## TYPE

Ceiling/Wall

## DIMENSIONS

A: Ø 90cm x 30cm / Ø 35.5" x 11.75"

B: Ø 90cm x 15cm / Ø 35.5" x 6"

## 3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

## CERTIFICATIONS



Application: dry indoor location only

## MATERIALS

Aluminum, Acrylic

## TECHNICAL INFORMATION

### Input Voltage

110–120V, 220–240V, 110–277V

### Lamping

Static CCT: 7W 35V DC LED


DW CCT: 10W 35V DC LED

CRI 90+, 50,000 hours

### Controls

Phase dimming, 0–10V, DALI

## COLOUR TEMPERATURE OPTIONS



## DIM TO WARM

Warm / DIM - Bright / DIM +



## MANUFACTURED

Canada

## FINISHES



Black (BLK) Silver (SLV)

## LENS FINISH



Clear (CLR)



For custom finishes, please inquire.

| SERIES | SIZE | TYPE | SHADE                      | FINISH                                | CCT                                       | PS                           | VOLTAGE IN                    |
|--------|------|------|----------------------------|---------------------------------------|---|------------------------------|-------------------------------|
| IRI    | 90   | CW   | <input type="checkbox"/> A | <input type="checkbox"/> BLK (BLACK)  | <input type="checkbox"/> 27 (2700K)       | <input type="checkbox"/> ELV | <input type="checkbox"/> 120  |
|        |      |      | <input type="checkbox"/> B | <input type="checkbox"/> SLV (SILVER) | <input type="checkbox"/> 30 (3000K)       | <input type="checkbox"/> O10 | <input type="checkbox"/> 230  |
|        |      |      |                            |                                       | <input type="checkbox"/> 35 (3500K)       | <input type="checkbox"/> DAL | <input type="checkbox"/> 277* |
|        |      |      |                            |                                       | <input type="checkbox"/> DW (DIM TO WARM) |                              |                               |
|        |      |      |                            |                                       |   |                              |                               |

\*277 only available with 010