




## Dimensions



## Accessories

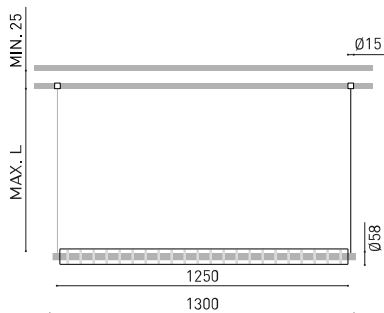

TRIMLESS TOOL

## Awards



reddot winner 2023  
lighting design



Name	LOOP 1300 INDIRECT WIRE TRIMLESS 5M DIM PUSH 2700K
Reference	A4743230BG
Colour	Brushed Gold - Other colours, please consult
Base Finishing	Textured black
RAL	Electrolytic bath
Category	SUSPENSION

## PRODUCT

LOOP 1300 INDIRECT WIRE TRIMLESS 5M DIM PUSH 2700K

A4743230BG

Brushed Gold - Other colours, please consult

Textured black

Electrolytic bath

SUSPENSION

## LIGHT SOURCE

LED

Gross luminous flux

2900 lm

Colour temperature

2700 K

Chromatic stability

MacAdam Step 3

Colour Rendering Index

CRI>95

Power

24,6 W

Current

700 mA

Efficacy

118 lm/W

LED lifespan

L90B10 > 50.000h

Energy efficiency class

F

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency

38%

Light beam angle

110°

## LIGHTING FIXTURE | ELECTRICAL DATA

Driver

Included - Remote

Power values of the system

27,80 W

Frequency

50/60 Hz

Dimming

Push - Other DIM, please consult

Electrical insulation class

□

## OTHER DATA

Sealing

IP20

Wireless control

Please Consult

Recess measurements

Ø20 mm

Cord length

Max. 5 m

Fast adjustment tensioner

No

Weight

3100 g

Packaged weight

4760 g

Packaging dimensions

Ø127 x 1645 mm

Units per package

1


Materials

Optical glass / Optical Polymethyl Methacrylate




Daring and fanciful, Loop appeals to industrial lyricism with a design inspired by electrical insulators. The protagonist of the decoration, its body is a sequence of light disks with an aluminium interior. It's adorned by a suspended glass cylinder that acts as a fastflowing, controlled source of projected light.

Polar diagram

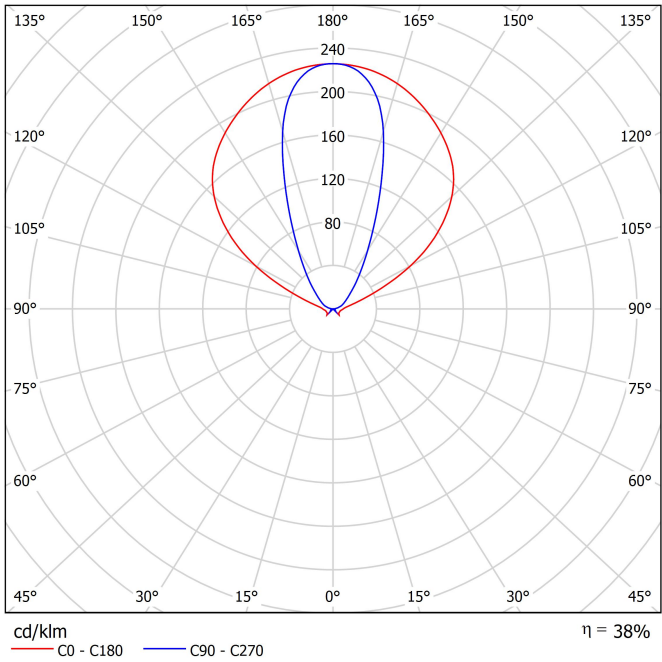

Conical diagram

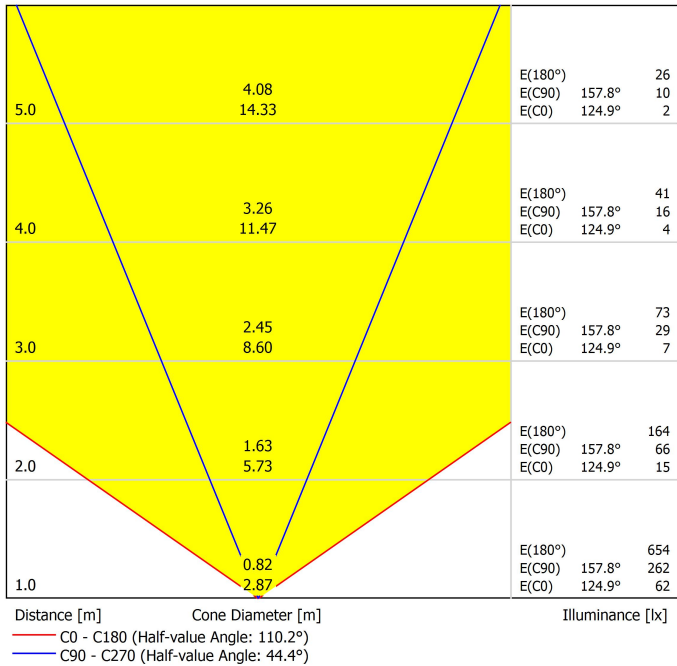



INSTALLATION GUIDE  
[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)



PRODUCT	
Model	Trimless Tool <b>D20 X D52 MM</b>
Reference	A478-00-01
Category	Accessories





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

