MUG

Jasmine

Ten-light chandelier



Spec sheet

JS-10


MUG

Jasmine

Ten-light chandelier

GLASS FINISH	Champagne Steel gray Light gray Blue shaded Pink shaded Champagne shaded
STRUCTURE FINISH	Pewter Bronze
STRUCTURE	Steel
INNER DIFFUSER	Borosilicate glass
OUTER DIFFUSER	Mouth-blown glass
STEM	Aluminum

LIGHT SOURCE	INTEGRATED LED MODULE 50 W 24V 3000°K 7280lm CRI 90+
VOLTAGE	220 - 240V 50Hz 120V 60Hz
DRIVER	ON-OFF (standard) Dimmable on request
ENVIRONMENT	Indoor
CERTIFICATION	CE UL WIRED IP20

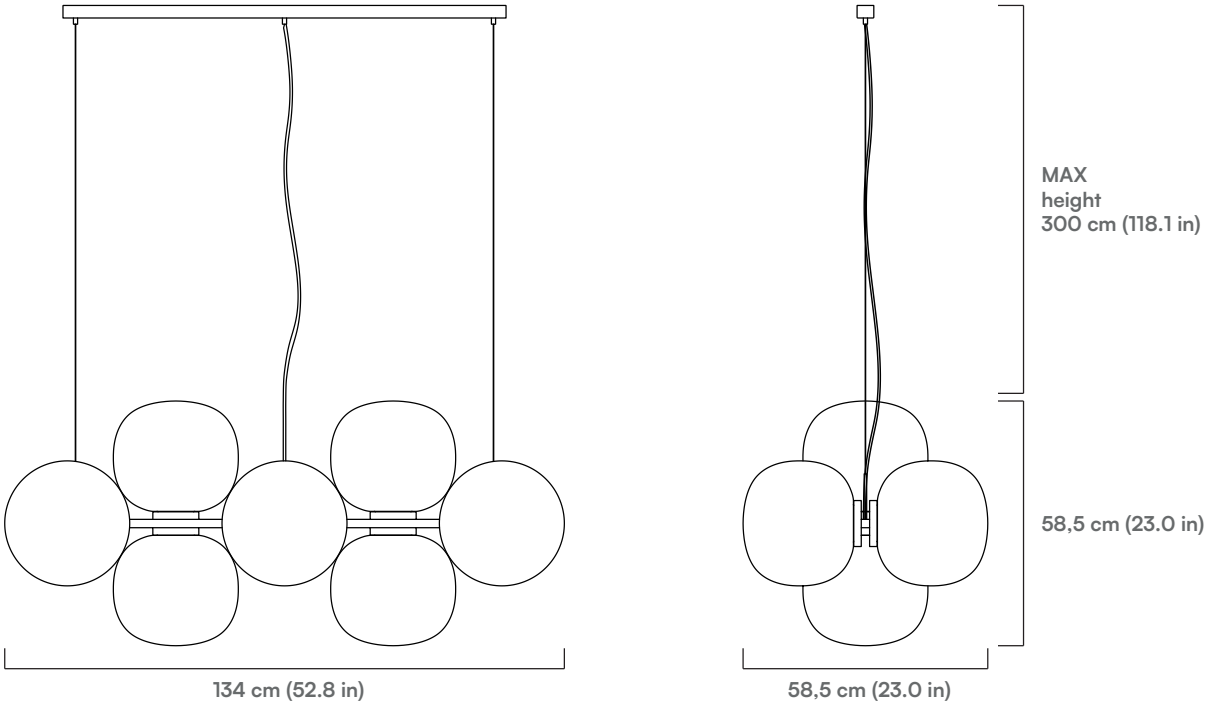

Product nomenclature of standard variation (custom solutions are available on request)

JS - 01 - P - PW - CH - 1 - E - 1

COLLECTION	LIGHTS	MODEL	STRUCTURE FINISHES	DIFFUSER FINISH	CONTROL	INPUT	CCT
JS - Jasmine	01 - Single 03 - 3 Lights 06 - 6 Lights 10 - 10 Lights 12 - 12 Lights 18 - 18 Lights	P - Pendant C - Chandelier	PW - Pewter BZ - Bronze	CH - Champagne SG - Steel gray LG - Light gray BS - Blue shaded PS - Pink shaded CS - Champagne shaded	1 - On/off (standard) D - Dali 0 - 0-10V T - Triac	E - 230V 50Hz U - 120V 60H	1 - 3000° K 2 - 2700° K