MUG

# Lounge

Four-light linear chandelier



## Spec sheet

LG-04-L

MUG

# Lounge

Four-light linear chandelier

| | |
|---|---|
| GLASS FINISH | Champagne<br>Steel gray<br>Light gray<br>Opal white<br>Satinated Champagne<br>Satinated Steel gray<br>Satinated Light gray |
| STRUCTURE FINISH | Matte black<br>Pewter |
| STRUCTURE | Aluminium and steel |
| INNER DIFFUSER | Polycarbonate |
| OUTER DIFFUSER | Mouth-blown glass |
| LIGHT SOURCE | INTEGRATED LED MODULE<br>48W 24V 3000°K 5600lm CRI 90+ |
| VOLTAGE | 220 - 240V 50Hz<br>120V 60Hz |
| DRIVER | ON-OFF (standard)<br>Dimmable on request |
| ENVIRONMENT | Indoor |
| CERTIFICATION | CE UL WIRED IP20 |

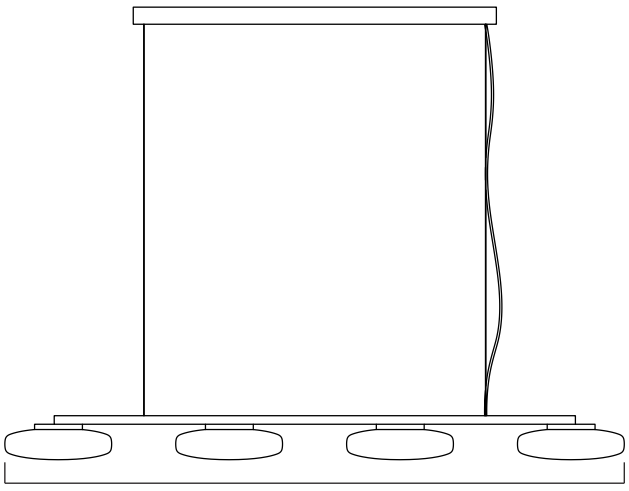


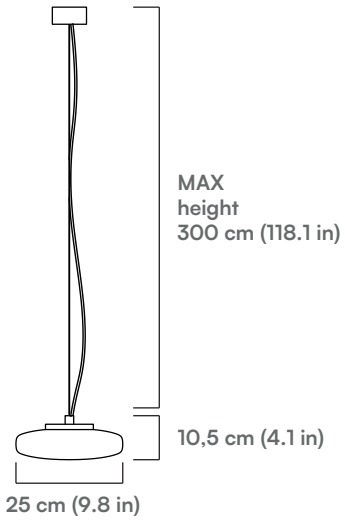


Product nomenclature of standard variation (custom solutions are available on request)

| LG | - | 01 | - | P | - | PW | - | CH | - | 1 | - | E | - | 1 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

| COLLECTION | LIGHTS | MODEL | STRUCTURE FINISHES | DIFFUSER FINISH | CONTROL | INPUT | CCT |
|---|---|---|---|---|---|---|---|
| LG - Lounge | 01 - Single<br>03 - 3 Lights<br>04 - 4 Lights | P - Pendant<br>W - Wall<br>L - Linear chandelier | PW - Pewter<br>MB - Matte Black | CH - Champagne<br>SG - Steel gray<br>LG - Light gray<br>SC - Satin champagne<br>SS - Satin steel gray<br>SL - Satin light gray<br>OW - Opal white | 1 - On/off (standard)<br>D - Dali<br>0 - 0-10V<br>T - Triac | E - 230V 50Hz<br>U - 120V 60H | 1 - 3000° K<br>2 - 2700° K |