



PERFORMANCE

Delivered Lumens 397 lm
 Power Consumption 9W
 Luminous Efficacy 44.3 lm/W
 Full detail in [photometry summary](#)

CERTIFICATION

ADA Compliant
 UL Listed
 UL Listed to Canadian safety standards.
 Suitable for Damp Locations

LED LIFESPAN

50k hours

SPECIFICATION LOGIC

DIFFUSER STYLE

| | |
|-------|---|
| Shell | 1 |
| Seed | 2 |
| Pod | 3 |

COLOR TEMPERATURE

| | |
|-----------------------|----|
| 2700K (warm white) | 27 |
| 3000K (soft white) | 30 |
| 3500K (neutral white) | 35 |

DIMMING / CONTROL / INPUT

| | |
|---|---------------|
| 10% Dimming, TRIAC / Forward Phase Control, 120V Input | 10_TRIAC_120V |
| 1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External) | 1_TRIAC_120V |
| 1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 1_10V_UNV |
| 0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External) | 0.1_10V_UNV |
| Low Voltage (Driver required, driver not included) | LV |

Mori Sconce

Sconces

YOUR PRODUCT CODE

MS- - - - -

DESCRIPTION

This super simple, organic, glowing sconce is distinguished by its pared-down silhouette. A simple cross-wire frame is fully cocooned in woven threads, then sprayed with a matte lacquer finish. The resulting built-in shade emits a lantern-like, ambient light, ideally installed in multiples.

MATERIALS

Resilient webbed TPU skin over wire frame. Finished with durable matte lacquer.

PRODUCT DIMENSIONS


Shell 7 in dia x 4 in D | Seed 7 in dia x 4 in D | Pod 11 in dia x 4 in D

PRODUCT WEIGHT


1 lb / 0.5 kg

DRAWINGS

MS-2 Mori Seed Sconce Dimension

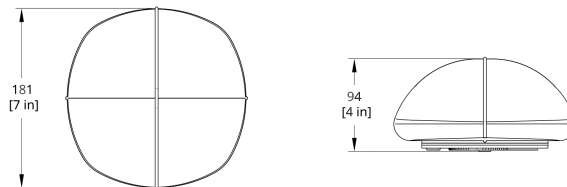

MS-3 Mori Pod Sconce Dimension

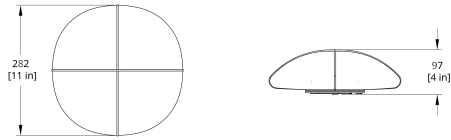

MS-1 Mori Shell Sconce Dimension

