


PIPELINE 125 — C/W

A—N—D

CEILING/WALL

Designed by Caine Heintzman

2021

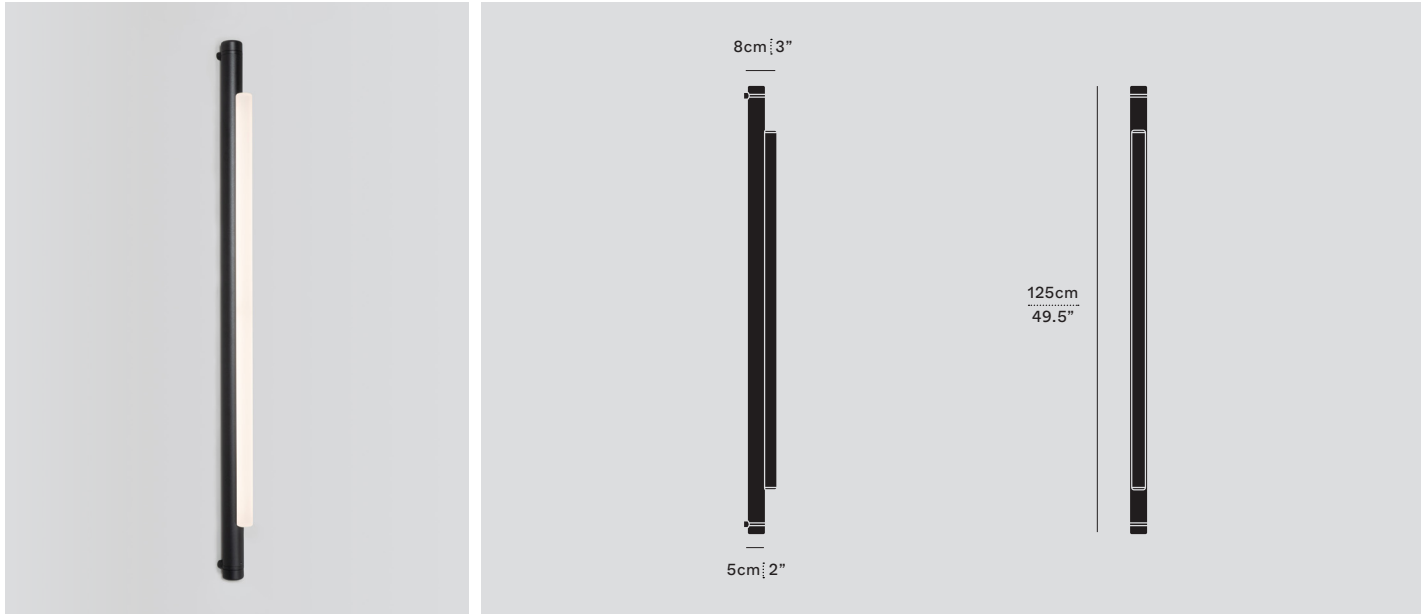

PIP-125-CW-BK-27-ELV-120

A-N-D.COM

TYPE

Ceiling/Wall

DIMENSIONS

125cm x 8cm x 5cm / 49.5" x 3" x 2"

POWER TRIM OPTIONS

- Trimless (Mud-in or surface mount, remote power supply)
- Cover plate (Junction box, 4.5" x 4.5")
- See install instructions

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110-120V, 220-240V, 110-277V

Lamping

Integral 17W 24V DC LED
CRI 90+, 50,000 hours


Lumens

716 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MANUFACTURED

Canada

MATERIALS

Aluminum, Acrylic

FINISHES



Black (BK)

White (WH)

Brass (BR)

Copper (CP)

Chrome (CH)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP	125	CW	<input type="checkbox"/> BK (BLACK)	<input type="checkbox"/> BK (BLACK)	<input type="checkbox"/> 27 (2700K)	<input type="checkbox"/> ELV	<input type="checkbox"/> 120
			<input type="checkbox"/> WH (WHITE)	<input type="checkbox"/> WH (WHITE)	<input type="checkbox"/> 30 (3000K)	<input type="checkbox"/> 010	<input type="checkbox"/> 230
			<input type="checkbox"/> BR (BRASS)	<input type="checkbox"/> BR (BRASS)	<input type="checkbox"/> 35 (3500K)	<input type="checkbox"/> DALI	<input type="checkbox"/> 277*
			<input type="checkbox"/> CP (COPPER)	<input type="checkbox"/> CP (COPPER)	<input type="checkbox"/> 41 (4100K)		
			<input type="checkbox"/> CH (CHROME)	<input type="checkbox"/> CH (CHROME)	<input type="checkbox"/> DW (DIM TO WARM)		
			<input type="checkbox"/>	<input type="checkbox"/>			

*277 only available with 010