


PIPELINE 125.3 — C/W

A—N—D

CEILING/WALL

Designed by Caine Heintzman

2021

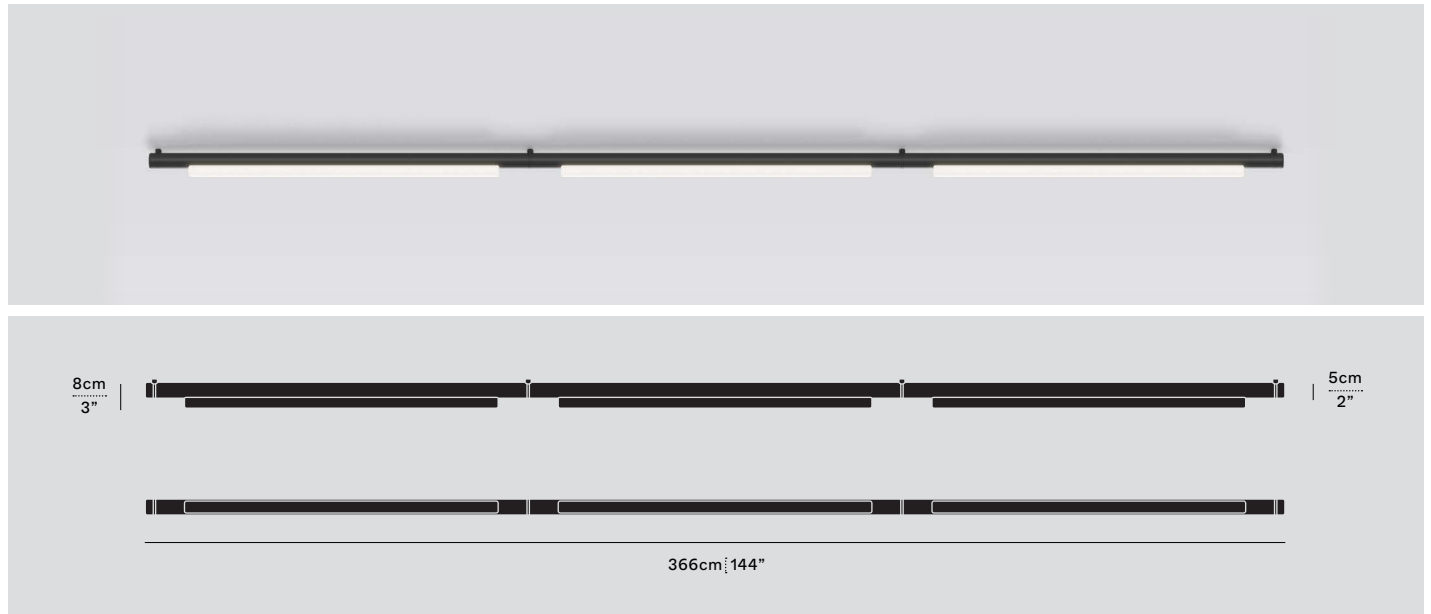

PIP-125.3-CW-BK-27-ELV-120

A-N-D.COM

TYPE

Ceiling/Wall

DIMENSIONS

366cm x 8cm x 5cm / 144" x 3" x 2"

POWER TRIM OPTIONS

– Trimless (Mud-in or surface mount, remote power supply)

– See install instructions

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 51W 24V DC LED
CRI 90+, 50,000 hours


Lumens

2148 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM

Warm / DIM - Bright / DIM +




MANUFACTURED

Canada

MATERIALS

Aluminum, Acrylic

FINISHES

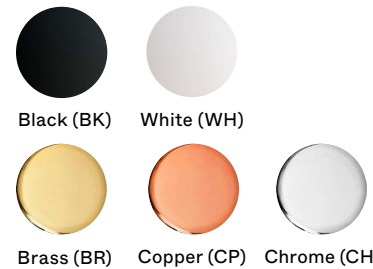

Black (BK) White (WH) Brass (BR) Copper (CP) Chrome (CH)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP	125.3	CW	<input type="checkbox"/> BK (BLACK) <input type="checkbox"/> WH (WHITE) <input type="checkbox"/> BR (BRASS) <input type="checkbox"/> CP (COPPER) <input type="checkbox"/> CH (CHROME)	<input type="checkbox"/> BK (BLACK) <input type="checkbox"/> WH (WHITE) <input type="checkbox"/> BR (BRASS) <input type="checkbox"/> CP (COPPER) <input type="checkbox"/> CH (CHROME)	<input type="checkbox"/> 27 (2700K) <input type="checkbox"/> 30 (3000K) <input type="checkbox"/> 35 (3500K) <input type="checkbox"/> 41 (4100K) <input type="checkbox"/> DW (DIM TO WARM)	<input type="checkbox"/> ELV <input type="checkbox"/> 010 <input type="checkbox"/> DAL	<input type="checkbox"/> 120 <input type="checkbox"/> 230 <input type="checkbox"/> 277*

*277 only available with 010