


PIPELINE CM3 — C/W

A—N—D

CEILING/WALL

Designed by Caine Heintzman

2021

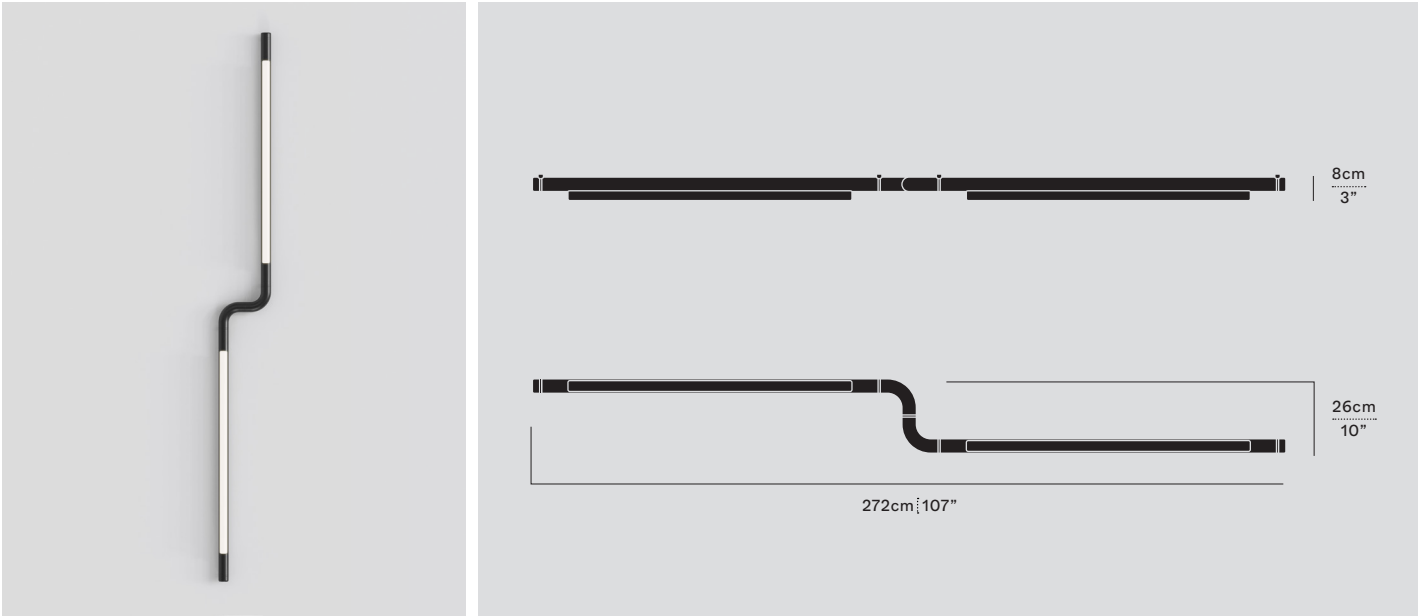

PIP-CM3-CW-BK-27-ELV-120

A-N-D.COM

TYPE

Ceiling/Wall

DIMENSIONS

272cm x 26cm x 8cm / 107" x 10" x 3"

POWER TRIM OPTIONS

- Trimless (Mud-in or surface mount, remote power supply)
- See install instructions

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 34W 24V DC LED
CRI 90+, 50,000 hours


Lumens

1432 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM




MANUFACTURED

Canada

MATERIALS

Aluminum, Acrylic

FINISHES

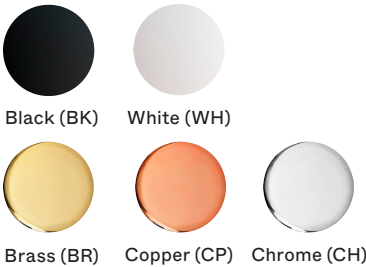

SERIES	SIZE	TYPE	BODY FINISH	END CAP/ JOINER/ELBOWS	CCT	PS	VOLTAGE IN
PIP	CM3	CW	<input type="checkbox"/> BK (BLACK) <input type="checkbox"/> WH (WHITE) <input type="checkbox"/> BR (BRASS) <input type="checkbox"/> CP (COPPER) <input type="checkbox"/> CH (CHROME)	<input type="checkbox"/> BK (BLACK) <input type="checkbox"/> WH (WHITE) <input type="checkbox"/> BR (BRASS) <input type="checkbox"/> CP (COPPER) <input type="checkbox"/> CH (CHROME)	<input type="checkbox"/> 27 (2700K) <input type="checkbox"/> 30 (3000K) <input type="checkbox"/> 35 (3500K) <input type="checkbox"/> 41 (4100K) <input type="checkbox"/> DW (DIM TO WARM)	<input type="checkbox"/> ELV <input type="checkbox"/> 010 <input type="checkbox"/> DAL	<input type="checkbox"/> 120 <input type="checkbox"/> 230 <input type="checkbox"/> 277*

*277 only available with 010