



**PERFORMANCE**

Delivered Lumens Glass Globe: 1337 lm | PET  
 Globe: 1449 lm  
 Power Consumption 19.7W  
 Luminous Efficacy Glass Globe 67.4 lm/W | PET  
 Globe 73.1 lm/W  
 90 CRI  
 Full detail in [photometry summary](#)

**CERTIFICATION**

UL Listed  
 UL Listed to Canadian safety standards.  
 Suitable for Damp Locations

**LED LIFESPAN**

50k hours

**PATENT FILE NUMBER**

US: D1,045,188, CA: 205277, 220118, AU: 202114558, 202116881, CN: Patent Pending, EU: 008636773-0001; 008636773-0001, UK: 6151348, 6151349, 6151350

**SUSPENSION**

White 7" round deep canopy  
 Standard 72" white cable or 28" white stem  
 Standard Hang Height 66" for cable, or 28" for stem  
 Minimum Hang Height 6" for cable or 14" for stem  
 Cable and stem extension available (up to 150")  
 Field trimmable

# Print Pendant

Pendants

**YOUR PRODUCT CODE**

PRP- [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

**DESCRIPTION**

With high-performance LEDs enclosed in a unique, prismatic shade, Print is the classic globe, elevated. Its striking surface, achieved by acclaimed designer Sylvain Willenz, is imprinted with a diamond texture that creates an understated, sparkling play of light.

**MATERIALS**

Glass, PET Plastic, Aluminum

**COLLECTION NOTES**

Print sconce & flush mount with small globe are ADA compliant, the fixtures with large globes are not.

**PRODUCT DIMENSIONS**

Large Globe 16 in dia x 12 in H

**PRODUCT WEIGHT**

8.3 lbs / 3.8 kg

**SPECIFICATION LOGIC**

---

**MOUNTING**

Cable Suspension	CS
Stem Mount	ST

**GLOBE**

Large Globe	B
-------------	---

**DIFFUSER FINISH**

Clear/Frosted Glass	CF
Frosted PET	P2

**MODULE FINISH**

Matte White	PC20
-------------	------

**COLOR TEMPERATURE**

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40


**DIMMING / CONTROL / INPUT**

1% Dimming, TRIAC / Forward Phase Control, 120V Input	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV

**DRAWINGS**

---

PRP-CS-B Print Pendant Cable Suspension

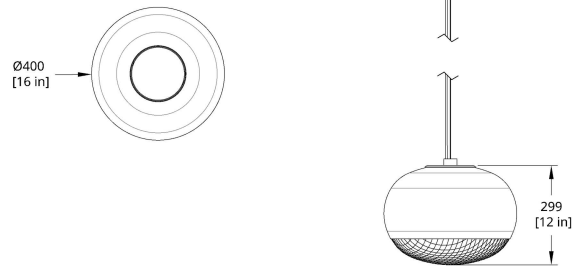

PRP-ST-B Print Pendant Stem Mount

