



## Description

Puro is a boldly minimalistic variation on atmospheric pendant lights. Inspiration for the collection and its name come from the Spanish word for "cigar", which also means "pure" and is a reference to the composition's clean lines. The Puro collection comprises of single vertical or horizontal tube or a single bell light suspended beneath a vertical tube and dual bell lights suspended beneath a horizontal tube. The diffused glow of the tubes combines with that of the bells to elicit a dynamic ambience, while the alternating gloss and matte finishes provide a degree of provocation. When standing alone as single tubes, amazing installations can be created, such as a composition of tubes coupled to a screen dividing space and evoking an intimate atmosphere bordering on scenography. Puro offers atmospheric room lighting as well as lighting for offices, hospitality interiors, boutiques, showrooms and private dining areas.



## Tech. description


Glass tube fitted with throughsockets with connectors on both sides. These sockets are designed for connection between canopy and luminair, and between luminair and bottom part Spotlight (PC1121).

Available colour options: <https://mbapi.cz/red/pis/eu/en/pc1158>

## CONSTRUCTION SPECIFICATION

<b>Weight:</b>	2.8 kg
<b>Construction material:</b>	glass, metal
<b>Cord length [mm]:</b>	2,000 mm
<b>Mounting:</b>	ceiling
<b>Environment:</b>	indoor

## DIMENSIONS [mm]



## ELECTRICAL SPECIFICATION

<b>Input voltage [V]:</b>	100 - 240 V
<b>Frequency [Hz]:</b>	50-60Hz
<b>Max. power [W]:</b>	7 W LED
<b>IP rating:</b>	20
<b>Socket:</b>	-
<b>Light source:</b>	non-user replaceable LED module
<b>Energy class:</b>	E

## CERTIFICATIONS




# DATASHEET

## LED SOURCE




Download

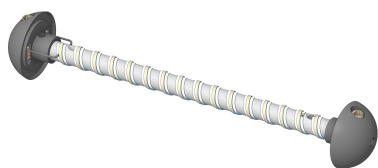


**CP10208**

<b>Type</b>	LED module
<b>Lamp wattage [W]</b>	7 W
<b>Input voltage [V]</b>	24 VDC
<b>Energy class</b>	E
<b>Flux [lm]</b>	595 lm
<b>Light colour [K]</b>	2700 K
<b>CRI</b>	90+
<b>Lifespan [h]</b>	20000h
<b>Dimmable</b>	yes (PWM)

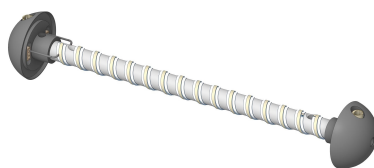

**CP10210**

<b>Type</b>	LED module
<b>Lamp wattage [W]</b>	7 W
<b>Input voltage [V]</b>	24 VDC
<b>Energy class</b>	E
<b>Flux [lm]</b>	659 lm
<b>Light colour [K]</b>	4000 K
<b>CRI</b>	90+
<b>Lifespan [h]</b>	20000h
<b>Dimmable</b>	yes (PWM)

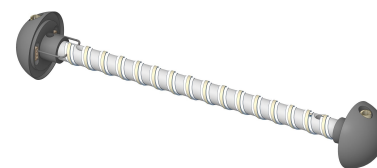

**CP10212**

<b>Type</b>	LED module
<b>Lamp wattage [W]</b>	7 W
<b>Input voltage [V]</b>	24 VDC
<b>Energy class</b>	E
<b>Flux [lm]</b>	705 lm
<b>Light colour [K]</b>	5000 K
<b>CRI</b>	90+
<b>Lifespan [h]</b>	20000h
<b>Dimmable</b>	yes (PWM)




### INNER FIXTURE

Dimensions O x w [mm] 110 x 330 mm  
Weight [kg] 1.3 kg  
Material glass



### Drawing

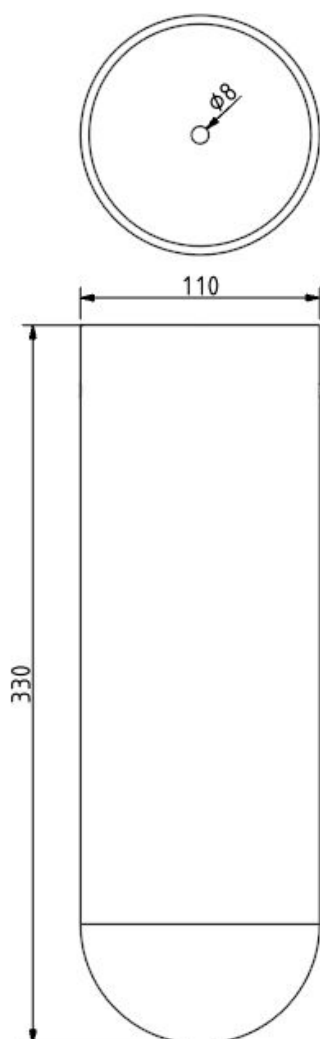

### Hole placement

