

# Queue Pendant Single

Pendants

## YOUR PRODUCT CODE

QP-  -  -  -  -  -  -  -

## DESCRIPTION

Queue is a linear LED pendant system with limitless potential, designed for flexible installation and an inviting presence. These modular bars of light connect via linear sliding joints and hang from stainless steel wire loops, allowing for custom compositions tailored to the needs of the space.

## MATERIALS

Textured PMMA lens, anodized aluminum body.

## COLLECTION NOTES

Additional linear run can be specified. Download Tech Pack to specify alternating light direction per segment with our sales rep. These configurations are not available via online preview. White Gold AA-02 requires minimum 20 business day lead time.

## PRODUCT DIMENSIONS

44" Run: 44.5 L x 3 W x 5 in H

## PERFORMANCE

Delivered Lumens 3900 lm per 44" run direct  
Power Consumption 45W  
Luminous Efficacy 86 lm/W  
90 CRI  
Full detail in [photometry summary](#)

## CERTIFICATION

UL Listed  
UL Listed to Canadian safety standards.  
Suitable for Damp Locations

## SUSPENSION

White 5" round flat canopy  
Standard 72" cable  
Standard Hang Height 66"  
Minimum Hang Height 12"  
Cable extension available (up to 420")  
Field trimmable

## LED LIFESPAN

50k hours

## SPECIFICATION LOGIC

### LENGTH

44"	44
88"	88
132"	132
176"	176

### DIFFUSER STYLE (DIRECTION)

Direct	DDIF_INO
Indirect	DNO_IDIF
Direct / Indirect	DDIF_IDIF

### PRIMARY FINISH

Natural Anodized	AA01
Gold Anodized	AA03
Black Anodized	AA04
Custom Anodized	AAXX
Custom Powder Coated	PCXX

### COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

### DIMMING / CONTROL / INPUT


1% Dimming, TRIAC / Forward Phase Control, 120V Input	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	0.1_10V_UNV

## DRAWINGS


PRODUCT WEIGHT

8 lbs / 3.6 kg


QP-44 Queue Pendant Dimension (Direct Indirect)

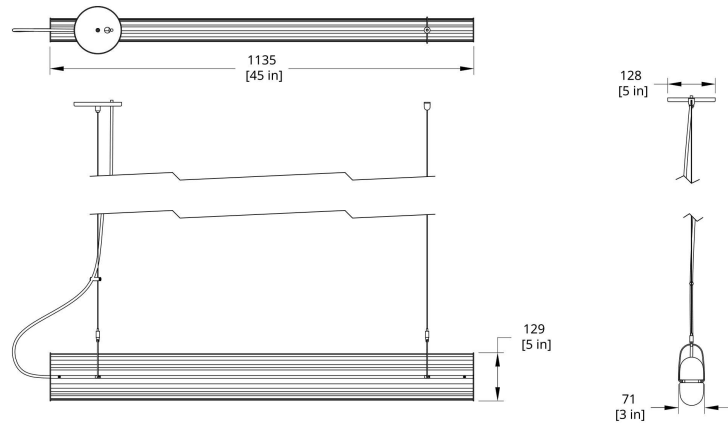

QP-88 Queue Pendant Dimension (Direct Indirect)

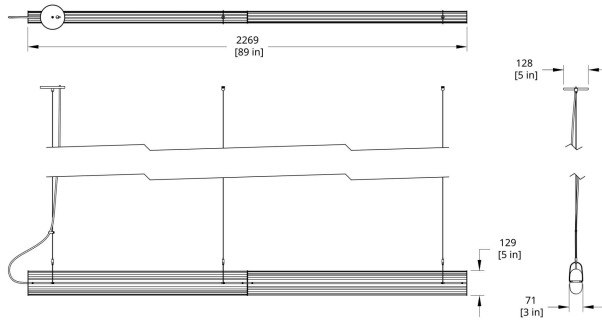

QP-132 Queue Pendant Dimension (Direct Indirect)

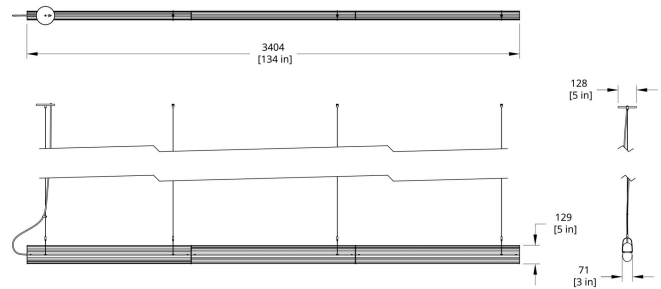

QP-176 Queue Pendant Dimension (Direct Indirect)

