



**PERFORMANCE**

Delivered Lumens 24": 1940 lm | 44": 3936 lm  
 Power Consumption 24": 24W | 44": 45W  
 Luminous Efficacy 24": 81 lm/W | 44": 87 lm/W  
 90 CRI  
 Full detail in [photometry summary](#)

**CERTIFICATION**

ADA Compliant  
 UL Listed  
 UL Listed to Canadian safety standards.  
 Suitable for Damp Locations

**LED LIFESPAN**

50k hours

**SPECIFICATION LOGIC**

**LENGTH**

24"	24
44"	44

**PRIMARY FINISH COLOR**

Natural Anodized	AA01
Black Anodized	AA04
Custom Anodized	AAXX
Custom Powder Coated	PCXX

**COLOR TEMPERATURE**

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

**DIMMING / CONTROL / INPUT**

1% Dimming, TRIAC / Forward Phase Control, 120V Input	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	0.1_10V_UNV

# Queue Sconce

Sconces

**YOUR PRODUCT CODE**

QS- - - - -

**DESCRIPTION**

Queue is a linear LED pendant and sconce system with limitless potential, designed for flexible installation and an inviting presence. Originally conceived as an answer to the monotony of workplace systems, Queue exudes a welcoming light and rich beauty in the subtle, rounded facets of its surface.

**MATERIALS**

Textured PMMA lens, anodized aluminum body.

**COLLECTION NOTES**

This product is designed to be installed with a 2" x 4" single gang junction box. For 4" octagonal or round boxes, a Junction Box Cover Plate will be required and is sold separately. White Gold AA-02 requires minimum 20 business day lead time.

**PRODUCT DIMENSIONS**


24": 24 L x 3 W x 4 in D | 44": 44.5 L x 3 W x 4 in D

**PRODUCT WEIGHT**

8 lbs / 3.6 kg

**DRAWINGS**

QS-44 Queue 44" Sconce Dimension

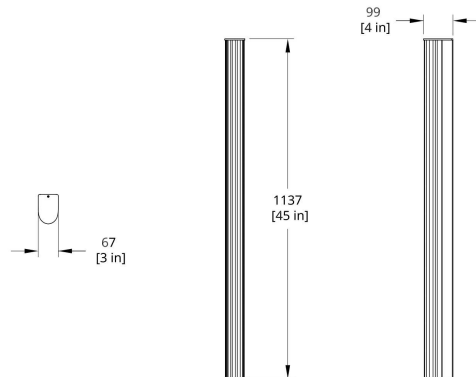

QS-24 Queue 24" Sconce Dimension

