
Dash

20502 rD

Wall Sconce
Low Voltage Input
Note: External power supply may be required.

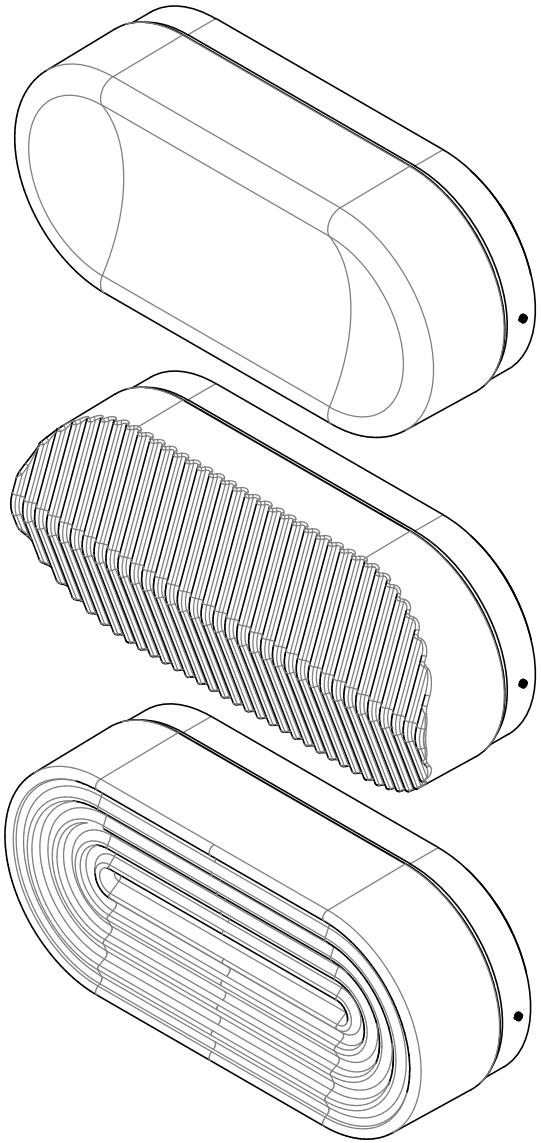

CAUTION:

Before starting, turn off power at main circuit panel.


ADVERTENCIA:

Antes de comenzar la instalación, apague la corriente en el tablero principal.

ATTENTION:


Coupez l'alimentation avant de proceder à l'installation.

Calling for backup? Scan above to contact our team.

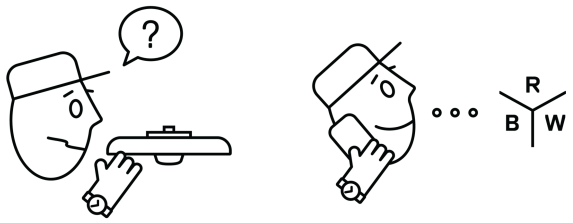


www.RBW.com
+1 212 388 0399
support@RBW.com
© 2025, RBW Studio LLC

What's Included: Part Configurations May Vary

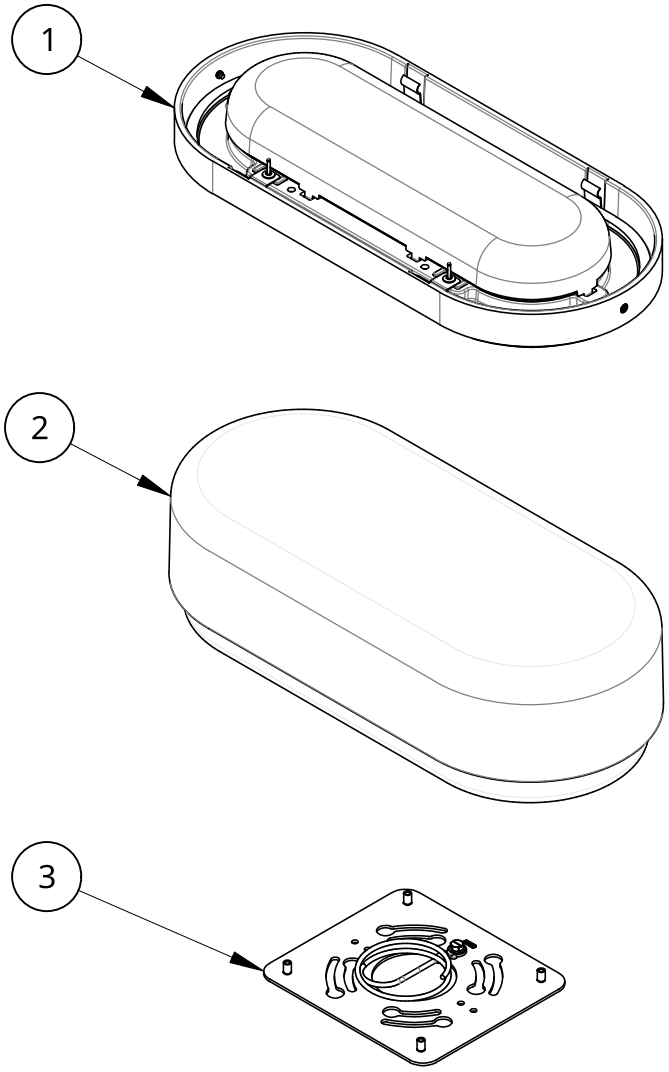


Item	Qty	Description
1	1	Assembly: Dash. Backplate
2	1	Dash. Glass Shade
3	1	Assembly: Dash. Wall Mount Plate w/ Mounting Screws

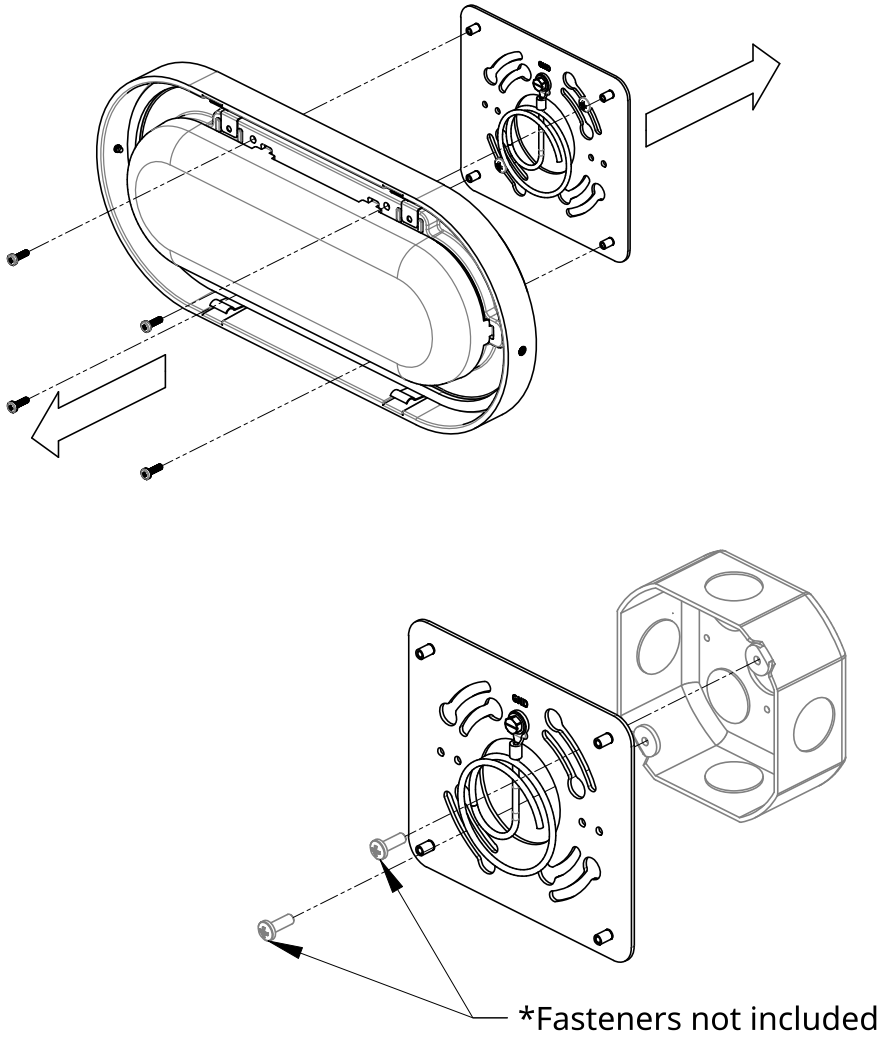


Installation - Wall Mount Plate

1. Remove mounting fasteners from Backplate.
2. Connect Ground Strap according to electrical code.
3. Fasten Wall Mount Plate to Junction Box, ensuring edge of plate is level.

NOTE: This luminaire can be installed horizontally or vertically depending on the mounting orientation of the Wall Mount Plate.




⚠
Driver dimensions and
location may vary, consult
your order confirmation for details.

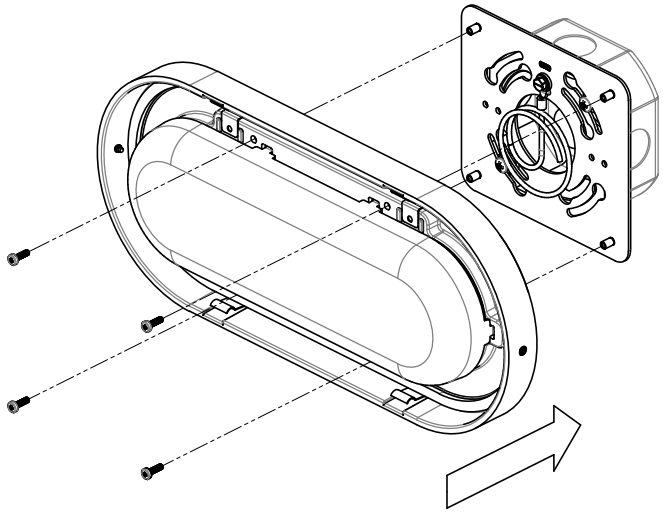

Installation - Backplate

3. Connect Red (+) and Black (-) Sconce wires to low voltage leads from externally located driver.
4. Fix Backplate to Wall Mount Plate with (4) provided fasteners.

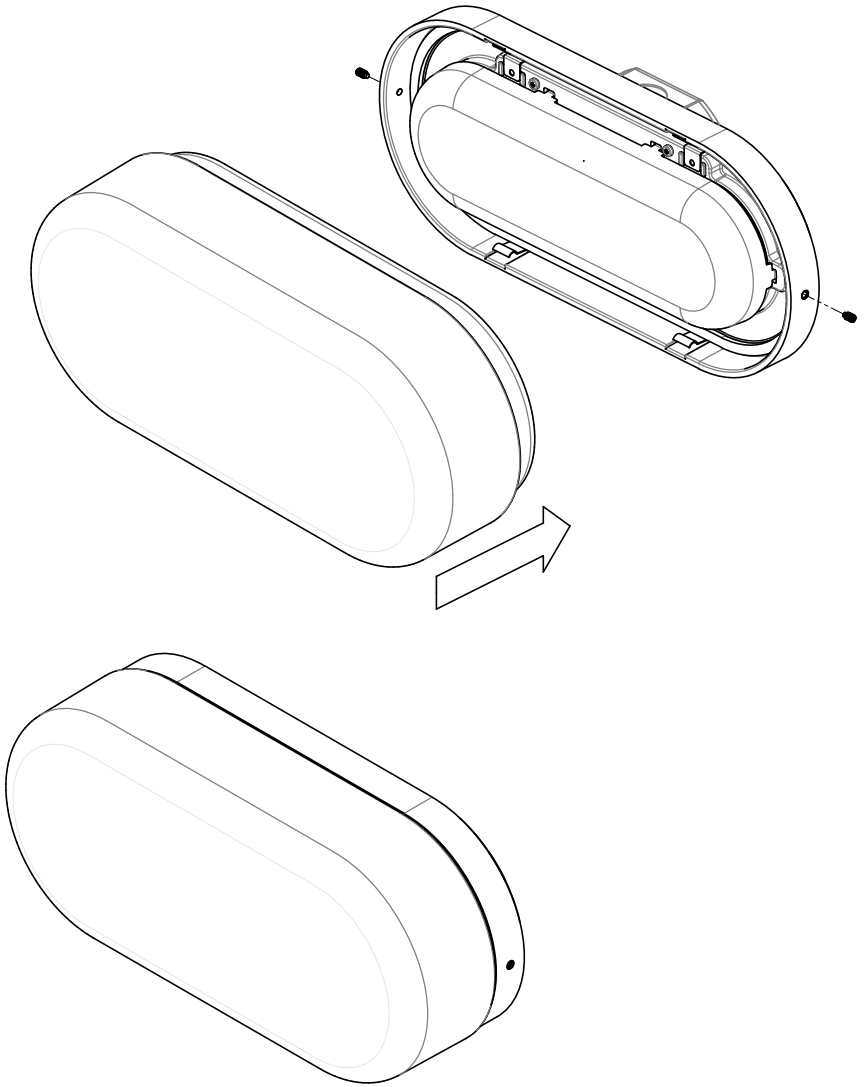

Installation - Glass Shade

5. Snap Glass Shade into spring clips of Backplate, maintaining positive pressure on shade.
6. Tighten set screws at both ends of the Backplate to secure the glass.
7. Congratulations! End of guide.