

Radiant Square

Sconces

YOUR PRODUCT CODE

RD-SQ- - - - -
 - - - -

DESCRIPTION

Diffusing a soft halo of light, Radiant pairs minimalist design with robust LED output and the texture and warmth of solid, sustainably harvested-wood. Custom options for the sconce's simple wooden shade include two shapes, three sizes, and four finishes, allowing for rhythmic color and pattern compositions when installed in groups.

MATERIALS

Ethical sourced solid wood, plastic diffuser, metallic powder coat aluminum base.

PRODUCT DIMENSIONS

Large 12 L x 12 W x 3 in D | Medium 10 L x 10 W x 3 in D | Small 8 L x 8 W x 3 in D

PRODUCT WEIGHT

Large: 3.5 lbs / 1.6 kg | Medium: 2.5 lbs / 1.1 kg | Small: 2 lbs / 0.9 kg

PERFORMANCE

Delivered Lumens 450 lm
 Power Consumption 8W
 Luminous Efficacy 56.4 lm/W
 95 CRI
 Full detail in [photometry summary](#)

CERTIFICATION

ADA Compliant
 UL Listed
 UL Listed to Canadian safety standards.
 Suitable for Damp Locations
 IP20

PATENT FILE NUMBER

US: D1061994 CA: 212335 CN:
 ZL202230247275.0 EU: 009007651-
 0001/0002/0003

LED LIFESPAN

50k hours

SPECIFICATION LOGIC

SIZE

Small 8"	S
Medium 10"	M
Large 12"	L

WOOD FINISH

White Oak	WF01
Ebonized Oak	WF02
White	WF04
Tzalam / Caribbean Walnut	WF05

LIGHTING MODULE

Matte White	PC20
-------------	------

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

DIMMING / CONTROL / INPUT


1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
Low Voltage (Driver required, driver not included)	LV

IP RATING


IP 20	IP20
-------	------

DRAWINGS

RD-SQ-S Radiant Square Small

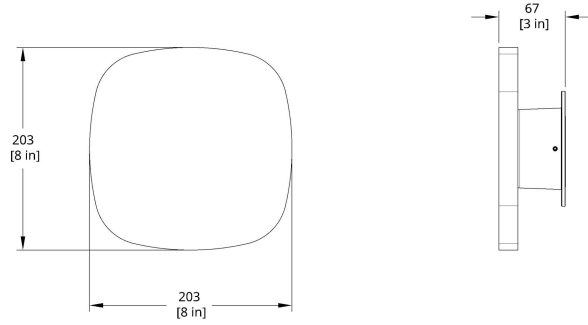

RD-SQ-M Radiant Square Medium

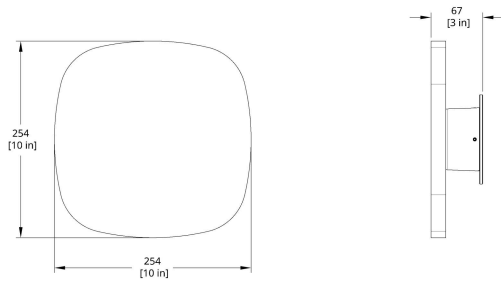

RD-SQ-L Radiant Square Large

