




Dimensions



Name	REC MINI DIM DALI 2700K NT
Reference	A3080020NT
Colour	Textured black
RAL	9005
Category	WALL

PRODUCT

Name	REC MINI DIM DALI 2700K NT
Reference	A3080020NT
Colour	Textured black
RAL	9005
Category	WALL

Type	LED
Gross luminous flux	2450 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	20 W
Current	700 mA
Efficacy	123 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	E

LIGHT SOURCE

Type	LED
Gross luminous flux	2450 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	20 W
Current	700 mA
Efficacy	123 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	E

Lighting efficiency	56%
Light beam angle	100°

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	56%
Light beam angle	100°

Driver	Included
Power values of the system	23,45 W
Frequency	50/60 Hz
Dimming	DALI
Electrical insulation class	□

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	23,45 W
Frequency	50/60 Hz
Dimming	DALI
Electrical insulation class	□

Sealing	IP20
Wireless control	Please Consult
Weight	900 g
Packaged weight	975 g
Packaging dimensions	232 x 190 x 48 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate


OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Weight	900 g
Packaged weight	975 g
Packaging dimensions	232 x 190 x 48 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminary that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

Polar diagram

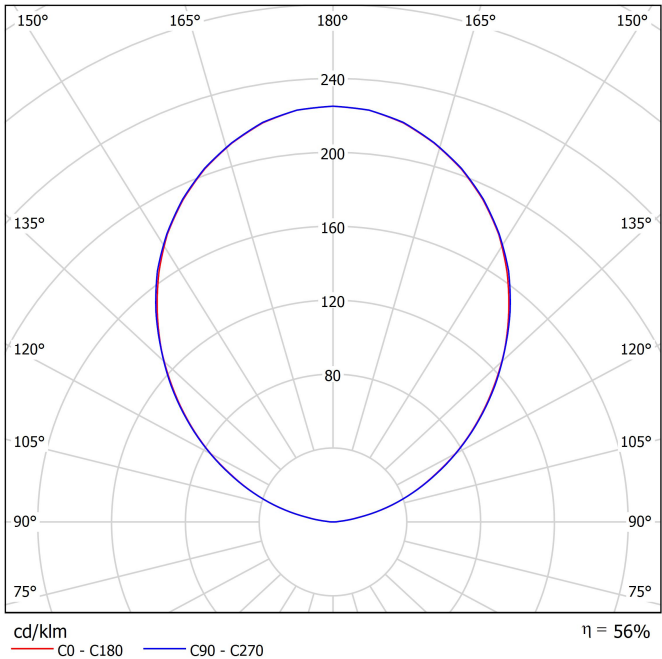

Conical diagram

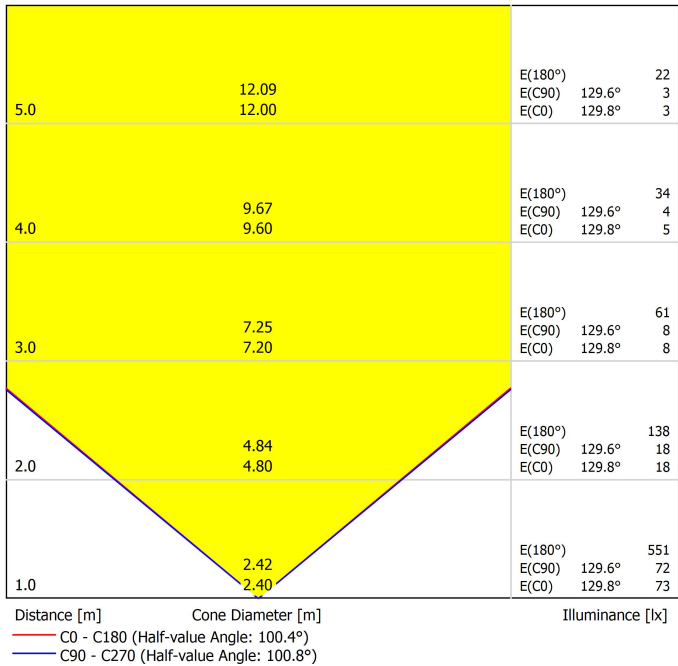



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

