




## Dimensions



## Accessories



DRIVER OPTIONS

## PRODUCT

Name REC OUTDOOR DOUBLE DIM DALI 2700K GT

Reference A5170020GT

Colour Textured grey

RAL 7021

Category OUTDOOR

## LIGHT SOURCE

Type LED

Gross luminous flux 1765 lm

Colour temperature 2700 K

Chromatic stability MacAdam Step 2

Colour Rendering Index CRI>90

Power 12 W

Current 900 mA

Efficacy 147 lm/W

LED lifespan L80B10 >60.000h

Energy efficiency class E

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency 44%

Light beam angle 114°

## LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system 13,73 W

Dimming DALI

Electrical insulation class II

## OTHER DATA

Sealing IP65

Outdoor Use Yes

Weight 1005 g

Packaged weight 1,09 g

Packaging dimensions 299 x 135 x 52 mm


Units per package 1

Materials Aluminium / Polycarbonate




Distinguished by its proportionality and geometry, the Rec collection discovers - and conquers - the outdoors. This new outdoor wall washer retains the slender complexion of the interior wall fixture with a 180° projection that bathes ceiling and walls. It is available in two versions depending on the source of the light, in a unidirectional version, with an upward or downward option, and in a Double version, unique for its bidirectional flow. In both, its lighting is ambient and deeply pleasant.

Polar diagram

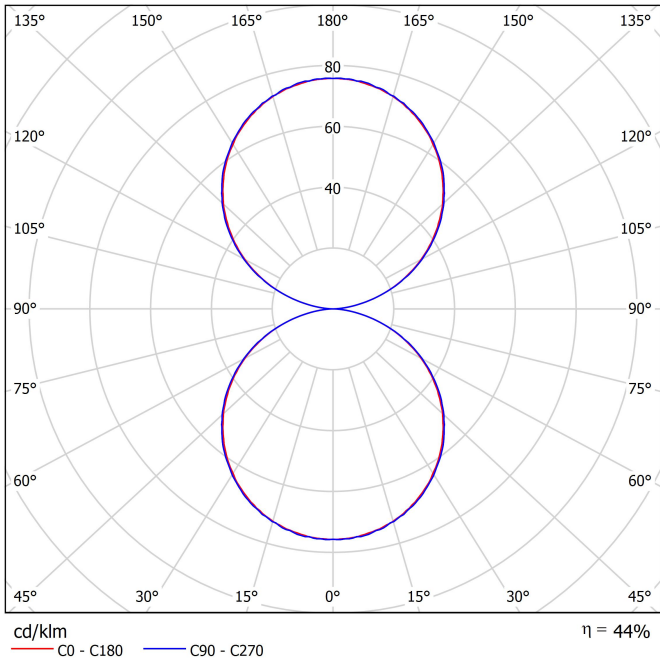


Conical diagram

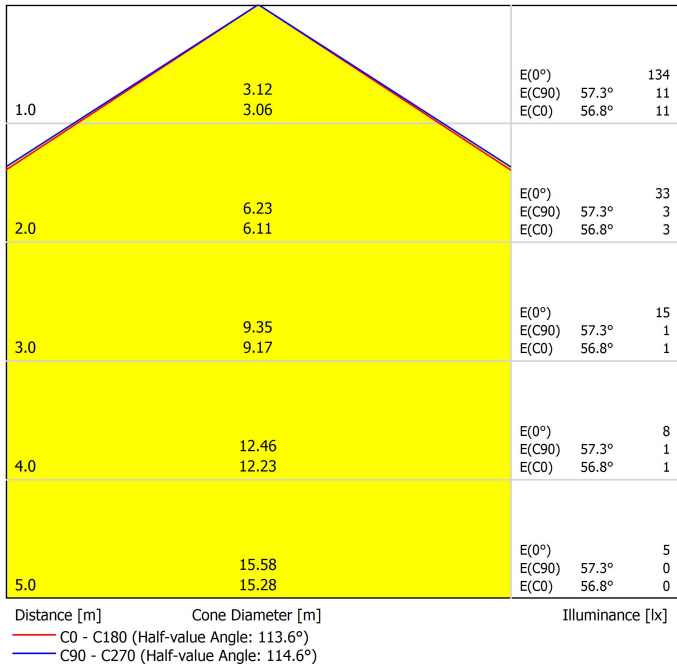


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	15.2	16.0	16.1	16.9	18.0	15.3	16.1	16.2	17.0	18.1	
	3H	16.9	17.6	17.8	18.5	19.7	16.9	17.7	17.9	18.6	19.7	
	4H	17.5	18.1	18.4	19.1	20.2	17.5	18.2	18.5	19.1	20.3	
	6H	17.8	18.5	18.8	19.4	20.6	17.9	18.5	18.8	19.4	20.7	
	8H	17.9	18.5	18.9	19.5	20.7	18.0	18.6	18.9	19.5	20.7	
4H	12H	18.0	18.5	18.9	19.5	20.7	18.0	18.6	19.0	19.5	20.7	
	2H	15.6	16.3	16.5	17.2	18.4	15.7	16.3	16.6	17.3	18.4	
	3H	17.5	18.0	18.4	19.0	20.2	17.5	18.1	18.5	19.0	20.3	
	4H	18.2	18.7	19.2	19.7	20.9	18.2	18.7	19.2	19.7	21.0	
	6H	18.7	19.1	19.7	20.1	21.4	18.7	19.1	19.7	20.1	21.4	
8H	12H	18.8	19.2	19.8	20.2	21.5	18.9	19.2	19.9	20.2	21.5	
	2H	18.9	19.2	19.9	20.2	21.5	18.9	19.2	19.9	20.2	21.5	
	4H	18.4	18.8	19.4	19.7	21.0	18.4	18.8	19.4	19.8	21.1	
	6H	19.0	19.3	20.0	20.3	21.6	19.0	19.3	20.0	20.3	21.6	
	8H	19.2	19.5	20.2	20.5	21.8	19.2	19.5	20.2	20.5	21.8	
12H	12H	19.3	19.5	20.3	20.6	21.9	19.3	19.6	20.4	20.6	21.9	
	4H	18.3	18.7	19.4	19.7	21.0	18.4	18.7	19.4	19.7	21.0	
	6H	19.0	19.3	20.0	20.3	21.6	19.0	19.3	20.0	20.3	21.6	
	8H	19.2	19.5	20.3	20.5	21.8	19.2	19.5	20.3	20.5	21.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H		+0.2 / -0.3					+0.2 / -0.3					
S = 2.0H		+0.4 / -0.7					+0.4 / -0.7					
Standard table		BK06					BK06					
Correction Summand		-1.1					-1.1					
Corrected Glare Indices referring to 1765lm Total Luminous Flux												

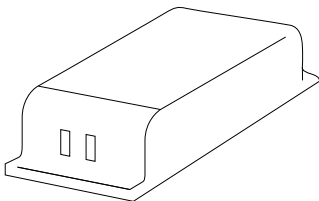


		P	V	D (A x B x C)
CONSTANT VOLTAGE LED POWER SUPPLY	0434-01-62	150W	48V	350 x 30 x 18mm
220 240	V~	IP20		

Driver must be placed on remote



DROP VOLTAGE TABLE		CABLE LENGHT (m)			
POWER (W)	CABLE SECTION (mm²)	<25	<50	<75	<100
150	0,75	✓	✓	✗	✗
	1,0	✓	✓	✓	✗
	1,5	✓	✓	✓	✓



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

