
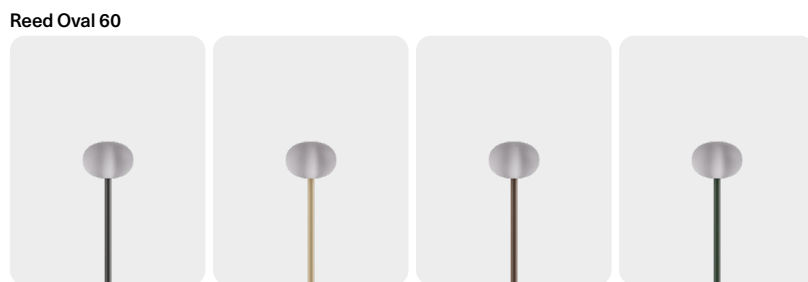
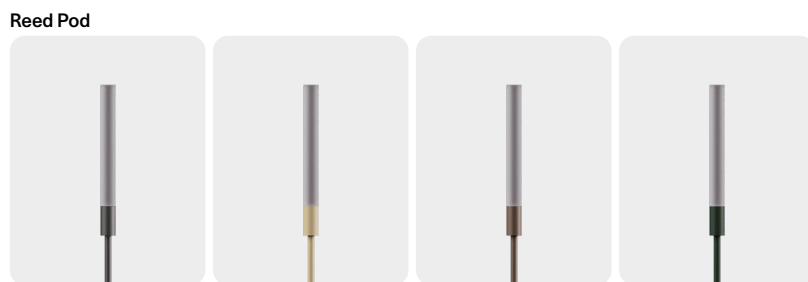


# LODES OUTDOOR

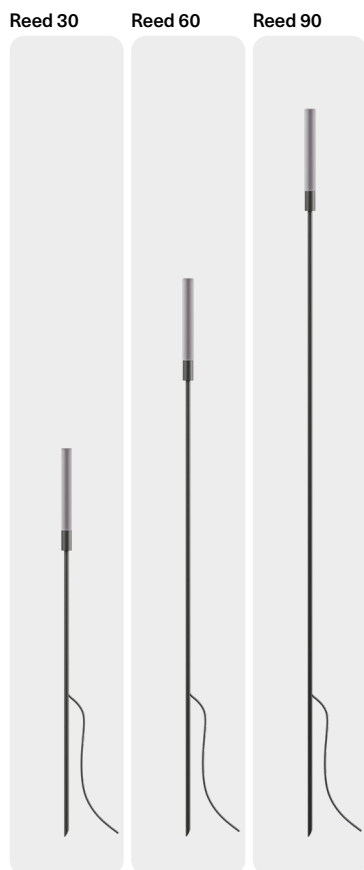

### Reed 30

**Dimensions**  
**Dimensioni**

**A**

**B**

**C**

**Category**  
**Categoria**

**Year**  
**Anno**

**Designer**  
**Progettista**

**Voltage**  
**Voltaggio**

**IP67**      **IK08**

CE      ENEC

Net weight Peso netto	A	0,17 kg 0,37 lbs	Pack Colli 2
	B	0,21 kg 0,46 lbs	
	C	0,45 kg 0,99 lbs	

**Energy class**  
**Classe energetica**

F

**Light source**  
**Sorgente luminosa**

80611

24V

LED  
0,3 WCRI ≥ 90  
MacAdam < 3-Step


Cable length 1,5 m

Rubber cable  
Section 2 × 0,5 mm<sup>2</sup>


Remote driver required  
(NOT INCLUDED).  
Driver remoto necessario  
(NON INCLUSO).




**Finish**  
**Finitura**

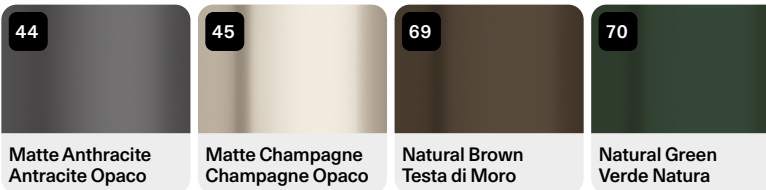

**Colour temperature**  
**Temperatura colore**

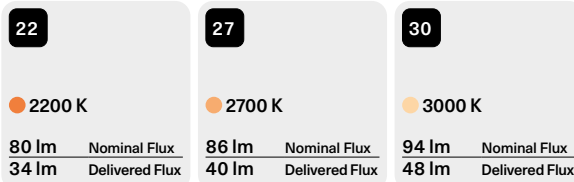


**Diffuser**  
**Diffusore**

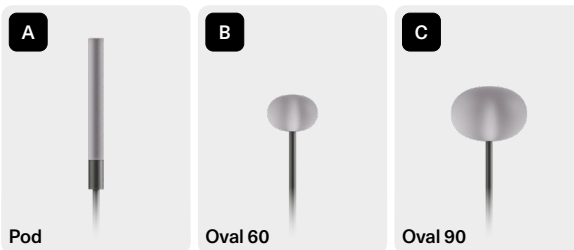

# LODES OUTDOOR

## Reed 60

### Dimensions Dimensioni

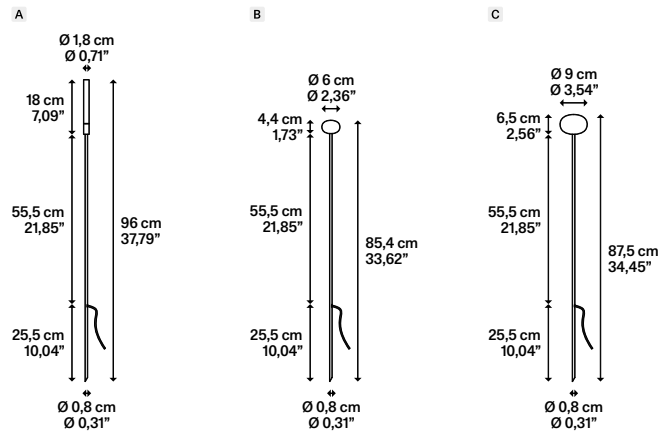

### Category Categoria

Spike Light

Year	2025	
Designer	Lodes	
Voltage Vtaggio	24 V	
IP67	IK08	
Net weight Peso netto	A 0,20 kg 0,44 lbs B 0,24 kg 0,52 lbs C 0,48 kg 1,05 lbs	Pack Colli 2
Energy class Classe energetica	F	

### Light source Sorgente luminosa

80612


24V

LED  
0,3 WCRI ≥ 90  
MacAdam < 3-Step

Cable length 1,5 m

Rubber cable  
Section 2× 0,5 mm<sup>2</sup>

Remote driver required  
(NOT INCLUDED).  
Driver remoto necessario  
(NON INCLUSO).



### Finish Finitura

44

Matte Anthracite  
Antracite Opaco

45

Matte Champagne  
Champagne Opaco

69

Natural Brown  
Testa di Moro

70

Natural Green  
Verde Natura

### Colour temperature Temperatura colore

22

2200 K

80 lm Nominal Flux  
34 lm Delivered Flux

27

2700 K

86 lm Nominal Flux  
40 lm Delivered Flux

30

3000 K


94 lm Nominal Flux  
48 lm Delivered Flux

### Diffuser Diffusore


A



B




C



# LODES OUTDOOR

## Reed 90

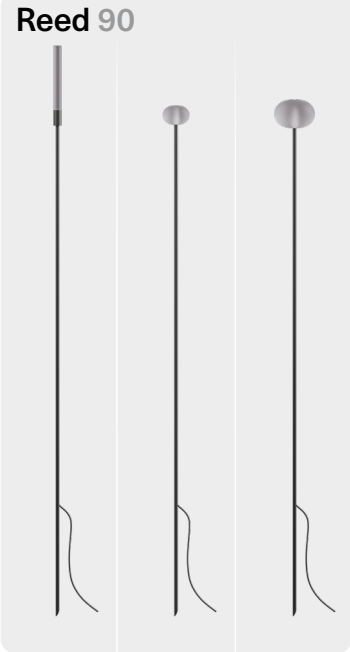


### Dimensions Dimensioni

**A**

**B**

**C**

Category Categoria		Spike Light	
Year		2025	
Designer		Lodes	
Voltage Voltaggio		24 V	
IP67		IK08	
			
Net weight Peso netto		A 0,22 kg 0,48 lbs	Pack Colli 2
		B 0,26 kg 0,57 lbs	
		C 0,50 kg 1,10 lbs	
Energy class Classe energetica		F	

### Light source Sorgente luminosa

80613

24V

LED  
0,3 WCRI ≥ 90  
MacAdam < 3-Step

Cable length 1,5 m

Rubber cable  
Section 2× 0,5 mm<sup>2</sup>

Remote driver required  
(NOT INCLUDED).  
Driver remoto necessario  
(NON INCLUSO).



### Finish Finitura

44

Matte Anthracite  
Antracite Opaco

45

Matte Champagne  
Champagne Opaco

69

Natural Brown  
Testa di Moro

70

Natural Green  
Verde Natura

### Colour temperature Temperatura colore

22

2200 K

80 lm Nominal Flux  
34 lm Delivered Flux

27

2700 K

86 lm Nominal Flux  
40 lm Delivered Flux

30

3000 K

94 lm Nominal Flux  
48 lm Delivered Flux

### Diffuser Diffusore

A

Pod

B

Oval 60

C

Oval 90