




Dimensions



Accessories

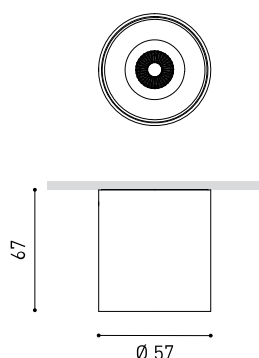

DRIVER OPTIONS

PRODUCT

Name	SHOT LIGHT S SURFACE FLOOD 2700K NT
Reference	A4860010NT
Color	Textured black - Other colours, please consult
RAL	9005
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	470 / 620 / 790 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	4 / 6 / 9 W
Current	350 / 500 / 700 mA
Efficacy	117 / 103 / 88 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	87%
Light beam angle	39°

LIGHTING FIXTURE | ELECTRICAL DATA


Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI / DALI - Push
Electrical insulation class	II




OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Weight	160 g
Packaged weight	195 g
Packaging dimensions	97 x 88 x 75 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

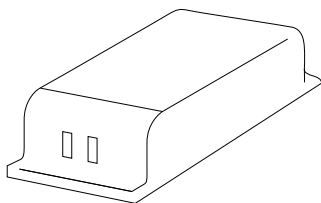

A surface luminaire conceived to be a discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.



DRIVER OPTIONS		I	P	K	Lm	
 ON/OFF	0434-00-39 1 to 3 Shot Light S Surface	350mA	4W	2700K	500	
				3000K	520	
				4000K	560	
	0434-00-42 1 to 3 Shot Light S Surface	500mA	6W	2700K	640	
				3000K	670	
				4000K	720	
	0434-00-40 1 to 3 Shot Light S Surface	700mA	9W	2700K	870	
				3000K	910	
				4000K	970	
 DALI	0434-00-46 1 to 3 Shot Light S Surface	700mA	9W	2700K	870	
				3000K	910	
				4000K	970	
	 DALI / PUSH	0434-01-25 1 to 5 Shot Light S Surface	700mA	9W	2700K	870
					3000K	910
					4000K	970
	220 240 V~		Driver must be placed on remote			



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

