

Vitis 7

Chandeliers

YOUR PRODUCT CODE

VS-7- - - - -

DESCRIPTION

Designed so that no two installations are exactly alike, Vitis, is a draped modular statement chandelier with customizable possibilities. Its flexible, translucent cables accommodate blown-glass orbs at various heights, giving the appearance of lights floating in space.

MATERIALS

Blown glass globes, metal cord grips, woven cord

COLLECTION NOTES

Vitis comes with 120 in / 3048 mm cord between globes. Custom length available upon request. Power enclosure comes with every order.

PRODUCT DIMENSIONS

Dimension will vary base on selected configuration. Please download Tech Pack for details.

PRODUCT WEIGHT

19.5 lbs / 8.9 kg

PERFORMANCE

Delivered Lumens 1274 lm (Ivory) 1000 lm (Smoked)
Power Consumption 45.5W
Luminous Efficacy Per Globe 28.1 lm/W (Ivory) 22.1 lm/W (Smoked)
90 CRI (Ivory) 95 CRI (Smoked)
Full detail in [photometry summary](#)

CERTIFICATION

UL Listed
UL Listed to Canadian safety standards.
Suitable for Damp Locations

LED LIFESPAN

50k hours

PATENT FILE NUMBER

US: D930226, D1068155, CA: 187450, AU: 201912511, EU: 006433652-0001, UK: GB90064336520002

SUSPENSION

White 6" round flat canopy, 6" mud-in (recessed) canopy. (8) ceiling grips and (1) end grip included.
Standard 120" cord between globes. Custom cord length available upon request.
Recommended Hang Height 66", refer to dimensional drawings for more info
Not field trimmable

SPECIFICATION LOGIC

GLASS FINISH

Ivory	IV
Frosted Smoked	SM

CORD FINISH

White Cord	CW
Black Cord	CB
Custom Color Cord	CX

PRIMARY FINISH COLOR

Natural Anodized	AA01
White Gold Anodized	AA02
Black Anodized	AA04
Polished Chrome	PF13
Custom Powder Coated	PCXX

COLOR TEMPERATURE


2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

DIMMING / CONTROL / INPUT


1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV

DRAWINGS

VS-7 Vitis Chandelier (Condensed)

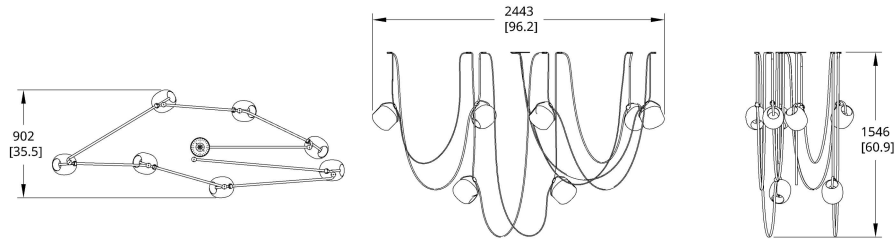

VS-7 Vitis Chandelier (Long)

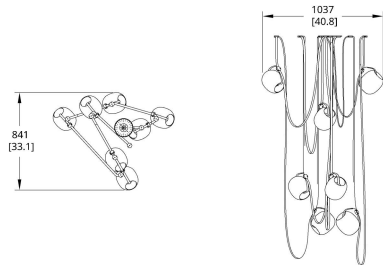

VS-7 Vitis Chandelier (Open)

